


RP27

FITTING INSTRUCTIONS

Threshold Plate

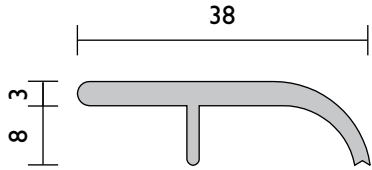

DETAILS

LOCATION


Door sill.

FIXING METHOD

Zinc plated, cross recess head CSK S.T. screws of the appropriate size and colour are supplied. Drill and plug for concrete.

USED IN CONJUNCTION


Raven door bottom seals.

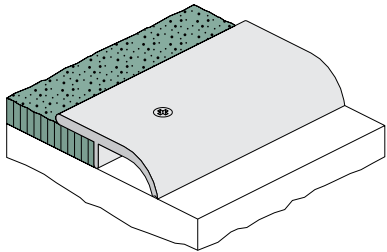

DESCRIPTION

RP27 is a heavy duty threshold plate designed for sill and carpet edge protection.

TOOLS

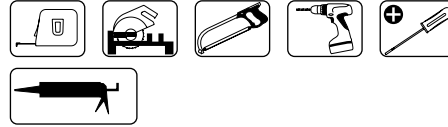

RAVEN PRODUCTS PTY. LTD.
18-22 Aldershot Rd,
Lonsdale SA 5160 Australia
T +61 8 8384 5455
raven.com.au

Designed and produced by
Raven Products Pty Ltd
(Australia)

Raven Products is an
ISO9001 QMS company
certified by SGS

Made in P.R.C. by Raven

Copyright: 03/25 (D)

Part No. ZSDSRP27

INSTALLATION

NOTES

» If installing a door bottom seal refer to door bottom seal instructions for correct fitting location of the RP27. It may be necessary to check out the RP27 ends to allow for the door stops. Where the RP27 meets the door jamb, sealant may be applied (user determined).

STEP 1 Machine cut RP27 to required length.


STEP 2 For screw fixing, mark and centre punch screw positions. Drill and countersink RP27 to suit screws provided. **(FIG.1)**

STEP 3 Position RP27 to suit application. **(FIG.2)**

STEP 4 Screw fix firmly but do not over tighten. **Note:** Drill and plug for concrete.

Note: If screw fixing in exposed external coastal areas, substitute the supplied fixing screws with equivalent stainless steel screws.

FIG.1

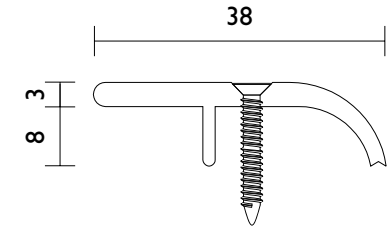

PAGE 1 OF 1

FIG.2

