


RP66

FITTING INSTRUCTIONS

Threshold Plate

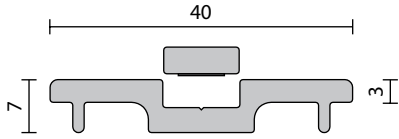

DETAILS

LOCATION

Door sill of internal doors with carpeted sills.

FIXING METHOD

Screw fix with self adhesive insert. Zinc plated, cross recess head CSK S.T. screws supplied.

DESCRIPTION

A flush fitting threshold plate designed for use on internal doors with carpeted floors. The RP66 can be used in conjunction with Raven door bottom seals such as the RP38Si to provide an optimum sealing surface as carpets can flatten and thus reduce sealing effectiveness. RP66 has concealed fixings with self adhesive aluminium insert.

TOOLS




RAVEN PRODUCTS PTY. LTD. Designed and produced by
18-22 Aldershot Rd, Raven Products Pty Ltd
Lonsdale SA 5160 Australia (Australia)
T +61 8 8384 5455
raven.com.au

Made in P.R.C. by Raven

Raven Products is an
ISO9001 QMS company
certified by SGS

Copyright: 03/25 (C)
Part No. ZSDSRP66

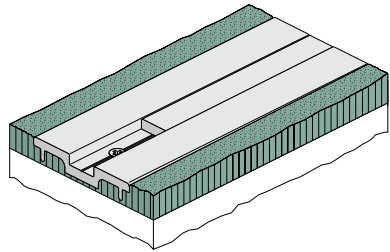

INSTALLATION

NOTES

- » Where "smooth edge" is used, check underneath of threshold ends to clear **(FIG.3)**
- » **CAUTION:** Be extremely careful when drilling and screw fixing since carpet strands may get pulled causing unsightly runs.

STEP 1 Measure between door jambs directly under door. **(FIG.2)**

STEP 2 Machine cut threshold and cover strip to size. **(FIG.1)**

STEP 3 Drill and countersink to suit screws supplied. **Note:** "vee groove" on threshold for easy drill location. **(FIG.1)**


STEP 4 Screw fix firmly but do not over tighten.

Note: If screw fixing in exposed external coastal areas, substitute the supplied fixing screws with equivalent stainless steel screws.

STEP 5 Close door to check that threshold is clear of door bottom.

STEP 6 Remove backing paper from adhesive and insert cover strip.

FIG.1

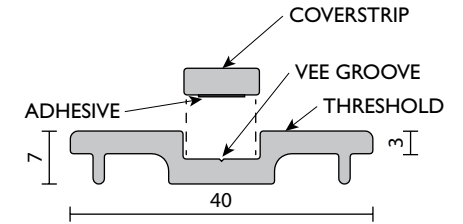

PAGE 1 OF 1

FIG.2

BUTT HINGE DOOR

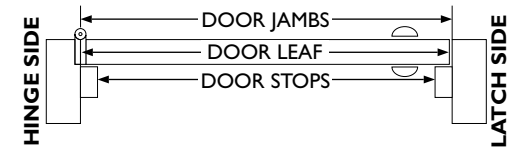


FIG.3

