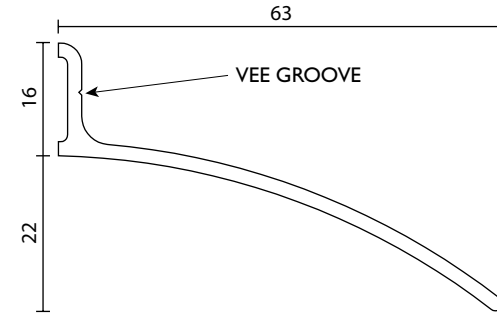

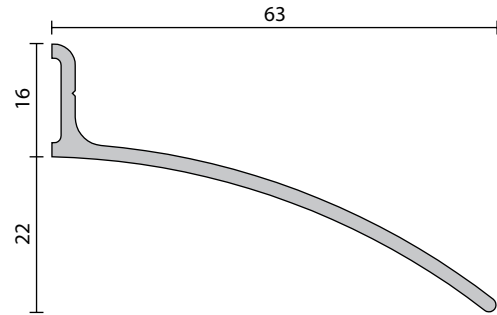
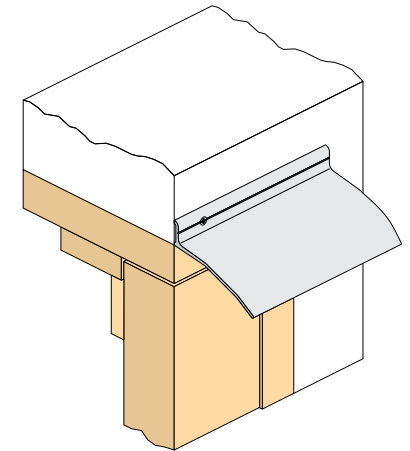


DESCRIPTION

A drip strip designed to shed or channel water away from the head of exposed doors. Particularly suitable for outward opening doors. The RP67 requires an allowance of 50mm overlap each side of the door opening.

INSTALLATION

- STEP 1** Machine cut RP67 to length allowing a 50mm weather protection overlap at each side of the door opening.
- STEP 2** Drill RP67 along vee groove at 150mm centres. Countersink aluminium to suit screws provided. **(FIG.1)**
- STEP 3** Position RP67 sufficiently above door frame head so door can open and close. Mark screw holes. **(FIG.2)**
- STEP 4** Drill pilot holes to suit screws provided.
- STEP 5** Screw fix.

FIG.1**PAGE 1 OF 1****RP67****FITTING INSTRUCTIONS****Drip Strip****FIG.2****DETAILS****LOCATION**

Above doors.

FIXING METHOD

Screw fix. Zinc plated, cross recess head S.T. screws supplied.

TOOLS

RAVEN PRODUCTS PTY. LTD.
18-22 Aldershot Rd,
Lonsdale SA 5160 Australia
T +61 8 8384 5455
raven.com.au

Raven Products is an
ISO9001 QMS company
certified by SGS

Designed and produced by
Raven Products Pty Ltd
(Australia)

Made by Raven in P.R.C.

Copyright: 07/24 (C)

Part No. ZSDSRP67