

Magnetic Contact Switches

Specification:

RSRDM


- * Reed switch for roller door applications
- * Z bracket magnet for flexibility in mounting
- * Extruded aluminum casings for harsh environments
- * Standard 50 cm armoured cable

Roller Door Contact





Dimension (mm):

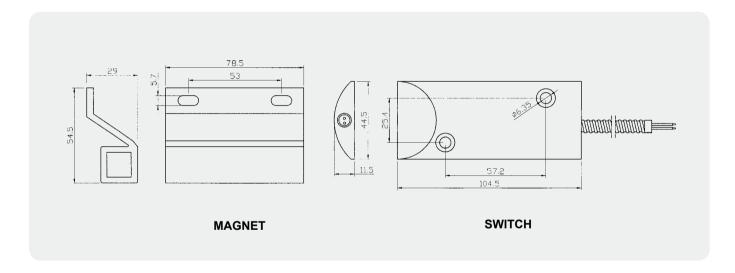

Order Information:

Part Number	Loop Type	Reed Form	Closed Gap (mm)	Maximum Initial Contact Resistance (Ohm)	Maximum Initial Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
RSRDM	Closed	N/O	75	0.150	7.5	100	0.4

