

This document contains proprietary and confidential information and such information may not be disclosed to others for any purpose or used in any way without written consent from the KNORR-BREMSE Organisation

This product or component is suitable for the specific application, or application type as defined herein and is not suitable for any other applications.
Knorr-Bremse is therefore not liable for any consequences which arise out of the use of this product for other applications.


Toleranzen						
Nominalmaße in mm						
≤6	>6 ≤30	>30 ≤80	>80 ≤120	>120 ≤315	>315	∇
±1	±1.5	±2	±2.5	±3	±4	±3°

001	TSK0461447	14.09.2016	Mueller W.
Rev.	Revision Reference	Date	Name
Numbers of described parts:		ISO 128-30	Special Characteristics: ☒ S/C ☒ C/C
or See Table 1		First Angle Proj.	Surface Treatment: --
CAD Model No.: Z005764		General Tolerances	Length Unit: mm Scale: 1:1
or  KNORR-BREMSE		Material: -x-	Weight: -- kg
Systeme für Nutzfahrzeuge GmbH		Responsible Dept./Team MDE3	Made from:
 Knorr-Bremse Group		Drawn 2012/04/11 Müller	Connecting Cable
Release Process Documentation in EDM, Level and Status Information in Watermark.		Drawing Number Z202466	In-Out TEBSG2.2 / BCA
		Doc-Type: ID Language: 52	RTR oder LAC / BL und TH / Diagnose
			Drw-Rev: 001
			Sheet 1 of 1

Cable Kabel	1	2	3
Cable Leitung	PUR/Cu-Litze 3 x 1.0 mm ²	PUR/Cu-Litze 3 x 1.0 mm ²	PVC/Cu-Litze CAN wire 2x1.5mm ² + (2x0.5)mm ²
alternativ/alternative	PVC/Cu-Litze	PVC/Cu-Litze	

BK = Black - Schwarz
YE = Yellow - Gelb
WH = White - Weiß
BN = Brown - Braun

Verdrahtungsplan / Wiring diagram

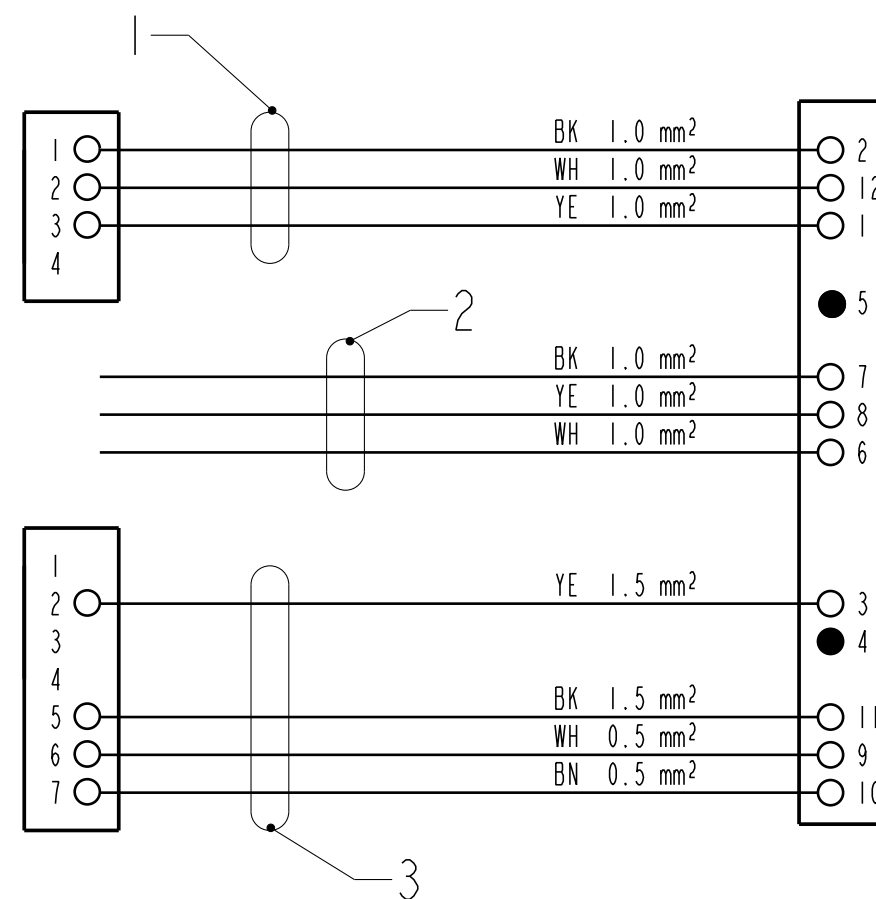

Control unit
Steuergerät

Manufacturing date: year, week, and weekday
Produktionsdatum: Jahr, Woche und Wochentag

Part number
Sachnummer

Printing plate
Bedruckung Schild

(BK/SW)
(YE/GE)
(WH/WE)

fig. similar
Abb. ähnlich

100±5

M30x1.5

max. 80

L3

Ø 5.9±0.2

Ø 6.3±0.2

L1

L2

Code A

60±10

1.5±1

2

3

Ø 5.9±0.2

fig. similar
Abb. ähnlich

AUX functions
AUX Funktionen

DIN 72585-B1 3.1 Sn/KI

stop lamp (BL) / traction help (TH)
Bremslicht (BL) / Traktionshilfe (TH)

diagnosis 4-pin
Diagnose 4-polig

100 mm

Permissible ambient temperature
Zulässige Umgebungstemperatur

-40°C ... +80°C

For further technical data see mounting instruction
Weitere Technische Angaben siehe Einbauanleitung

Y136137
Y037243

Type of enclosure according to DIN 40050 part 9
Schutzart nach DIN 40050 Teil 9

IPX7 IPX9K (in mounted condition)
IPX7 IPX9K (im montierten Zustand)