


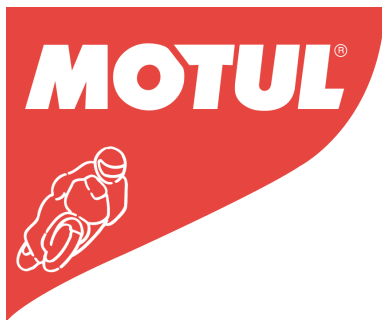

Air Filter Oil

Adhesive oil for foam air filters

Cross, Enduro, Trial, Trail motorcycle, Quads...

Suzuki RM series 1st fill oil

TYPE OF USE

MOTUL Air Filter Oil is a specific lubricant designed for foam air filters on Off-Road bikes and ATV. Use MOTUL Air Filter Clean for a perfect cleaning of your air filter prior to each lubrication.

PERFORMANCES

PERFORMANCES Meets Suzuki requirements
Used by Suzuki RM Series as first fill oil

Water resistant, efficiently retains dust, mud and sand for an extended engine life span.
Limited pressure loss on air intake: improves engine power output.
Anti clogging formula.
Prevents water penetrating the filter when crossing fords.
Rapid drying to prevent dripping.
Blue coloured for easy application.

RECOMMENDATIONS

Clean the filter.
Soak in a tray of MOTUL Air Filter Oil and allow penetrating thoroughly.
Take off the filter and press it without wringing it to remove excess product.
Let stand 10 minutes before refitting the air filter.
To improve air filtration efficiency, it is better to grease the rim of the filter and the inside of the airbox with MOTUL Tech Grease 300.

PROPERTIES

Density at 20°C (68°F)	ASTM D1298	0.833
Viscosity at 100°C (212°F)	ASTM D445	68.5 mm ² /s
Flash point	ASTM D93	41°C / 106°F

SECURITY

Refer to the information mentioned on the label and on the MSDS sheet