


Catalogue number: **3PH**□□□-□□ □□□

Rishabh 3 in 1 Current Transformer 100-630A, 5A Secondary



3 in 1 CT's 100-630A

- Wide range of System Current Ratings
- Compact Size
- Hinged Terminal Covers
- Degree of Protection; IP20
- Rated Secondary Output; 5A
- Case; Flame retardant Graded Classified UL 94V-0
- CE Approved Class Accuracy; 1 only
- Applicable Standards; IEC-61869-1&2 / IEC- 60044 -1

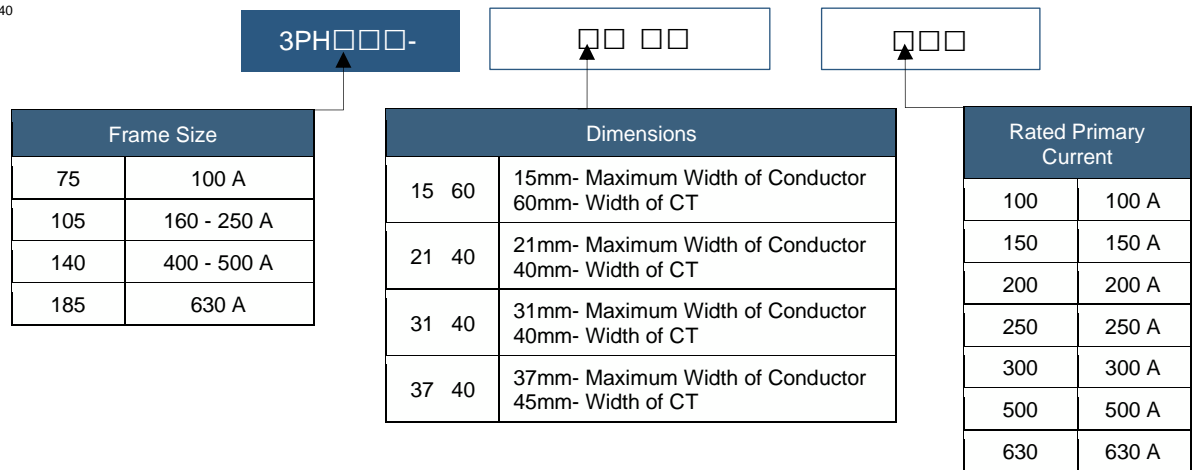


Properties

Properties	
Manufacturer	RISHABH
Product Range	Rishabh 3 in CTs
System Voltage	720V Maximum
Operating frequency	50Hz / 60 Hz
Rated Primary Rating	100 - 630 A
Rated Secondary Rating	5A
Class Accuracy	1
Rated Continuous Thermal Current	1.2 x I _n
Tested Insulation	3KV 50 Hz for 1 min
Insulation Class	E (120°C max)
Case	10% Glass Filled Polycarbonate Flame Retardant Grade Classified UL 94V-0
Ambient temperature	-20°C to +45°C
Storage temperature	-50°C to +80°C
Degree of Protection	IP20
Degree of Pollution	2




Dimensions and Rated Burden for 3PH75-15 60 100

Part Number	Rated Burden
	Class 1 VA
3PH75- 15 60 100	1.5

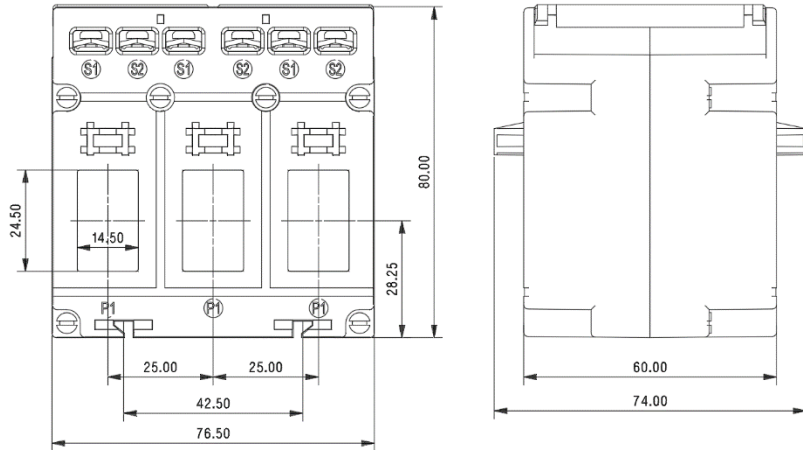


Dimensions and Rated Burden for 3PH105-21 40 □□□

Part Number	Rated Burden
	Class 0.5 VA
3PH105-21 40 160	1.5
3PH105-21 40 200	1.5
3PH105-21 40 250	1.5

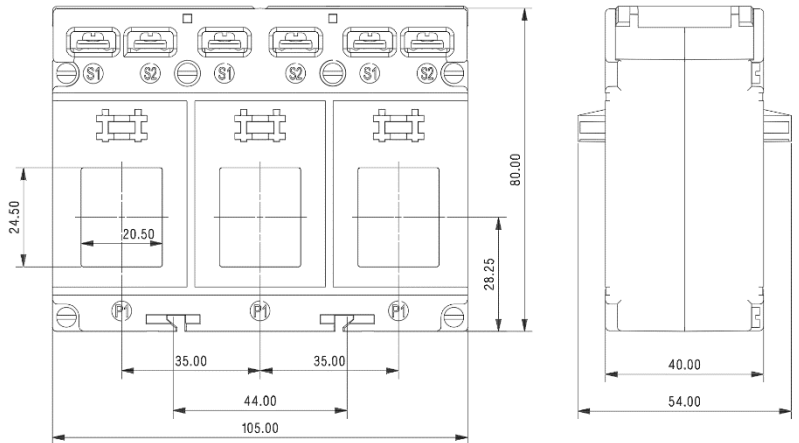

Dimensions and Rated Burden for 3PH140-31 40 □□□

Part Number	Rated Burden
	Class 1 VA
3PH140-31 40 400	2.5
3PH140-31 40 500	2.5

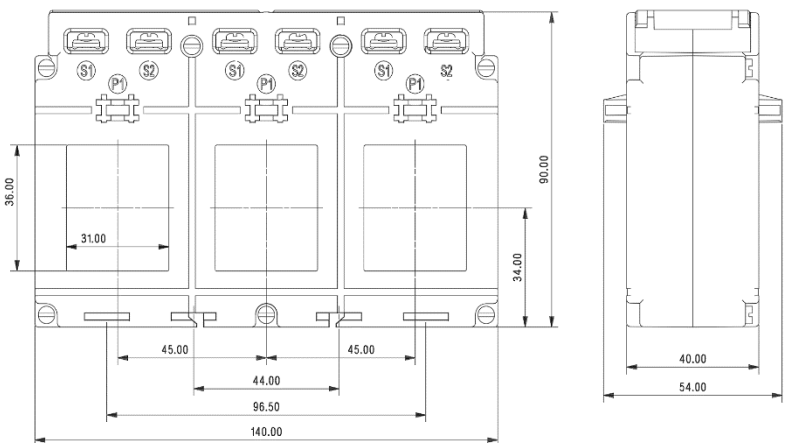

Catalogue number: **3PH**□□□-□□ □□□

Rishabh 3 in 1 Current Transformer 100-630A, 5A Secondary



Dimensions and Rated Burden for 3PH185-37 40 630

Part Number	Rated Burden
	Class 1 VA
3PH185-37 40 630	2.5

