


Catalogue number: **CRX**□□□□□□

CRXX□□□□□□

CVS Eureka IP65 Stainless Steel Enclosures

Eureka

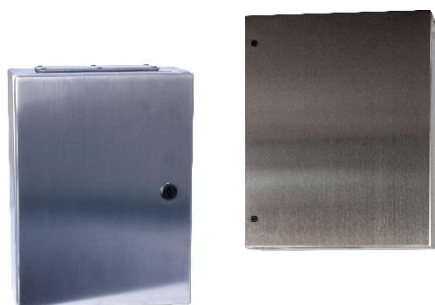

CVS Eureka IP65 Stainless Steel Enclosures

- AS/NZS 61439.1
- IP65 1.5 to 2.0mm 304/316 Stainless Steel Enclosures
- Wide range of Enclosure heights
- Rigid Construction
- High resistance to impact
- Compact installation and Easy earthing
- Complete with mounting plates
- Built for IEC 60529 standards

Enclosure Material		Height		Width		Depth	
CRX	304 Stainless Steel	25	250 mm	20	200 mm	10	100 mm
CRXX	316 Stainless Steel	30	300 mm	25	250 mm	15	150 mm
		40	400 mm	30	300 mm	20	200 mm
		50	500 mm	40	400 mm	25	250 mm
		60	600 mm	50	500 mm	30	300 mm
		70	700 mm	60	600 mm		
		80	800 mm	80	800 mm		
		100	1000 mm				
		120	1200 mm				

Properties

Properties	
Manufacturer	CVS
Product Range	Eureka IP65 304 Stainless Steel Enclosures Eureka IP65 316 Stainless Steel Enclosures
IP rating	IP65
Enclosure Material	304 Grade Stainless Steel 316 Grade Stainless Steel
Enclosure Thickness	1.5mm
Operating Temperature	Resistant to High temperatures (Good heat sink properties)
Resistance to chemicals	Resistant to chemical attacks
Impact resistance	High resistance to Impact
Earthing	Earthing Studs available on body, door, and mounting plate
EMC shielding	Blockage of electromagnetic signals (Stainless Steel)
Mounting Plate	Removable 1.4/2.0mm Galvanised Steel Mounting Plate
Cable Entry	Top or Bottom 1.5mm Stainless Steel Gland Plate
Standards	built to IEC 60529 standards



N.A.W. Controls Pty. Ltd.
Telephone: (03) 9464 6555
www.nawcontrols.com.au

CVS Eureka wall mounted 304 & 316 enclosures
September 2025

Catalogue number: **CRX**□□□□□□


CRXX□□□□□□

CVS Eureka IP65 Stainless Steel Enclosures

Eureka




Dimensions for CRX252015




FRONT ELEVATION

WITH FRONT DOOR FITTED




FRONT ELEVATION

FRONT DOOR & GEAR TRAY REMOVED




FRONT ELEVATION


FRONT DOOR REMOVED




GEAR TRAY



BOTTOM VIEW




SIDE VIEW



SIDE VIEW

FRONT DOOR REMOVED



DOOR LOCK

DOOR LOCK DIMENSIONS




Catalogue number: **CRX**□□□□□□

CRXX□□□□□□


CVS Eureka IP65 Stainless Steel Enclosures




Dimensions for CRXX/CRX302515- CRXX/CRX806030




FRONT ELEVATION




FRONT ELEVATION
FRONT DOOR & GEAR TRAY REMOVED




FRONT ELEVATION
FRONT DOOR REMOVED

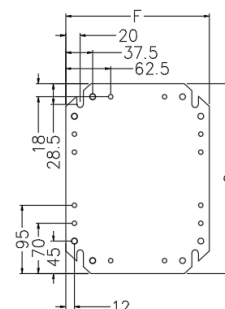


GEAR TRAY




BOTTOM SIDE
USABLE GLAND PLATE AREA



LEFT SIDE



LEFT SIDE
FRONT DOOR REMOVED



DOOR LOCK
DOOR LOCK DIMENSIONS

Part No.	A	B	C	D	E	F	G	H	I	J	K	L
CRX302515	300	256	264	250	206	200	153	129	149	137	174	60
CRX303015	300	256	264	300	256	250	153	129	149	137	174	60
CRXX303015	300	256	264	300	256	250	153	129	149	137	174	60
CRX403015	400	356	364	300	256	250	153	129	149	137	174	60
CRX403020	400	356	364	300	256	250	203	179	199	187	174	60
CRXX403020	400	356	364	300	256	250	203	179	199	187	174	60
CRX404020	400	356	364	400	356	350	203	179	199	187	259	88
CRXX404020	400	356	364	400	356	350	203	179	199	187	259	88
CRX504020	500	452	464	400	352	350	203	174	194	182	259	88
CRXX504020	500	452	464	400	352	350	203	174	194	182	259	88
CRX604020	600	556	564	400	356	350	203	179	199	187	259	88
CRXX604020	600	556	564	400	356	350	203	179	199	187	259	88
CRX604030	600	556	564	400	356	350	303	279	299	287	259	88
CRXX604030	600	556	564	400	356	350	303	279	299	287	259	88
CRX606025	600	556	564	600	556	550	253	229	249	237	310	115
CRXX606025	600	556	564	600	556	550	253	229	249	237	310	115
CRX705025	700	656	664	500	456	450	253	229	249	237	310	115
CRX806025	800	756	764	600	556	550	253	229	249	237	310	115
CRX806030	800	756	764	600	556	550	303	279	299	287	310	115
CRXX806030	800	756	764	600	556	550	303	279	299	287	310	115




Catalogue number: **CRX**□□□□□□

CRXX□□□□□□

CVS Eureka IP65 Stainless Steel Enclosures



Dimensions for CRXX/CRX808030- CRXX/CRX1208030

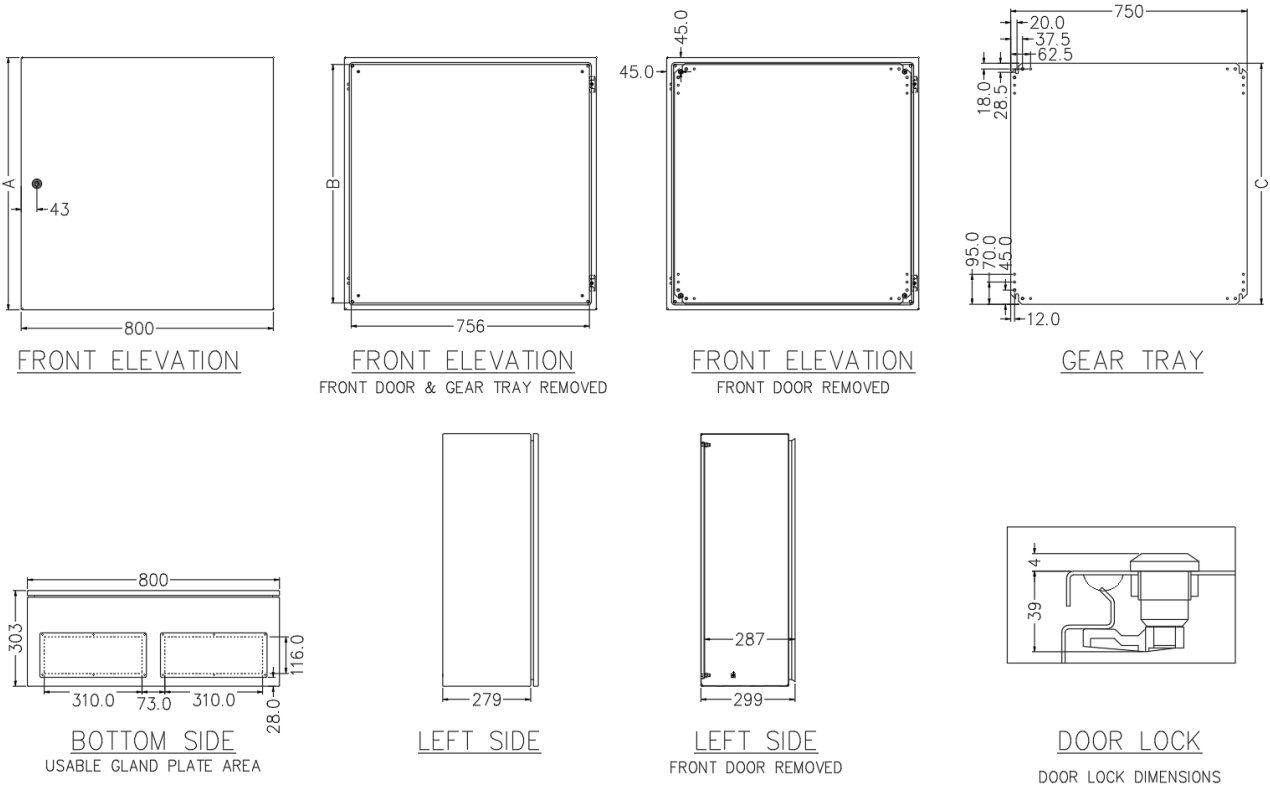

Part No.	A	B	C
CRX808030	800	756	764
CRXX808030	800	756	764
CRX1008030	1000	956	964
CRXX1008030	1000	956	964
CRX1208030	1200	1156	1164
CRXX1208030	1200	1156	1164

