




- AS/NZS 61439.1
- Colour: RAL 7035 Grey
- IP55 Mild Steel Enclosures
- Enclosure heights up to 2000mm
- Rigid Construction
- High impact resistance
- Easy Assembly
- C-Rails welded on the internal body for mounting accessories
- Complete with 3.0mm mounting plates and 100mm Black Plinth
- Can be made bayable by simply removing the side panel and joining units with fittings, which are included.
- Built for IEC 60529 standards
- Both the mounting plate and the inner door is adjustable via side mounting rails

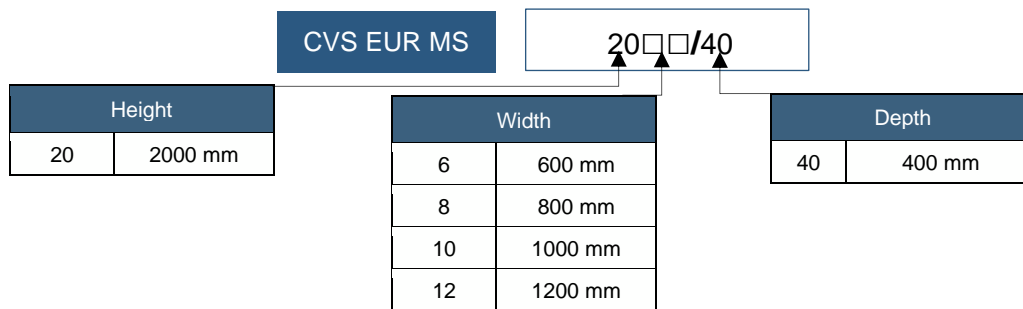

Properties


Properties	
Manufacturer	CVS
Product Range	Eureka IP55 Mild Steel Bayable Enclosures
IP rating	IP55
Enclosure Material	Polyester Powder coated Mild Steel
Enclosure Thickness	2.0mm
Removable Enclosure Parts	Front door, Rear panels, Bottom Gland Plate, Top and Side Panel
Door	Reinforced frame to increase rigidity
Available Colour	RAL7035 Grey
Temperature	Resistant to High temperatures
Chemical Resistance	Resistant to chemical attacks
Impact resistance	High resistance to Impact
Earthing	Easy Studs available on body, door, and mounting plate
EMC shielding	Blockage of electromagnetic signals (Mild Steel)
Mounting Plate	3mm Thick Mounting Plate with adjustable depth
Cable Entry	Top entry- 1.5mm GI Gland Plate
Standards	Built to IEC 60529 standards

Catalogue number: **CVS EUR MS20□□/40**



CVS Eureka IP55 Mild Steel Bayable Enclosures

Dimensions for EUR CVS MS206/40 & 208/40

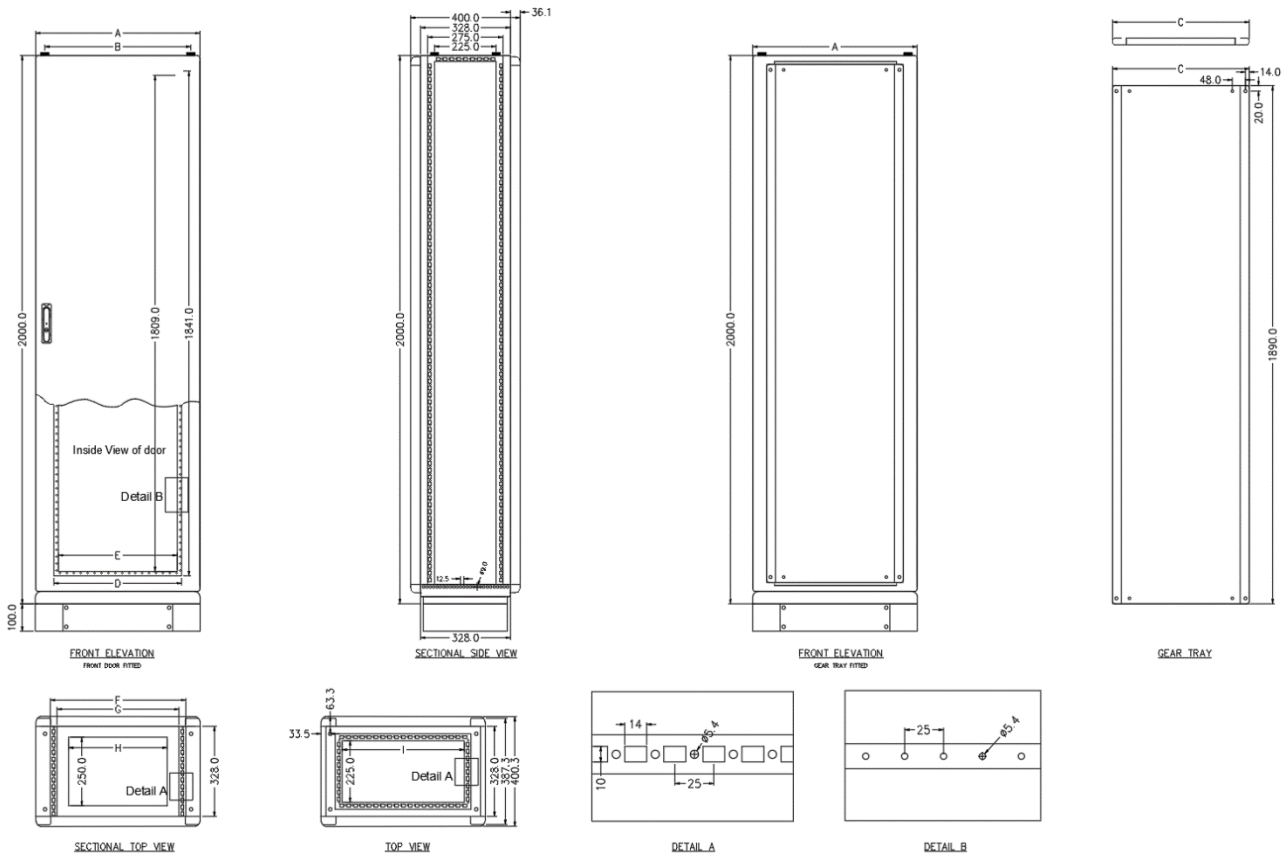


Enclosure Part No.	A	B	C	D	E	F	G	H	I
EUR CVS MS206/40	600	533	499	466	434	495	445	360	446
EUR CVS MS208/40	800	733	699	666	634	695	645	560	646



N.A.W. Controls Pty. Ltd.
 Telephone: (03) 9464 6555
www.nawcontrols.com.au

CVS Eureka Bayable Enclosures
 September 2020

Dimensions for EUR CVS MS2010/40

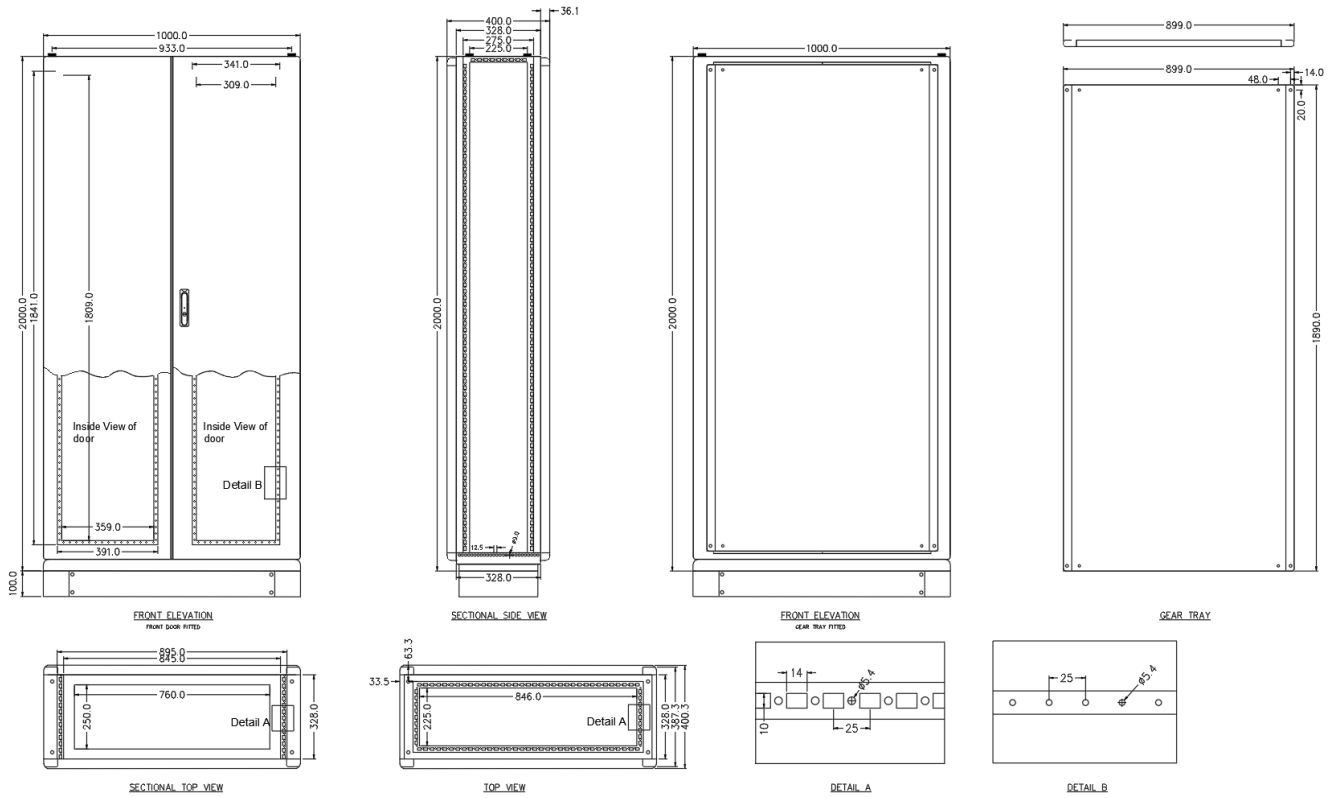

Dimensions for EUR CVS MS2012/40

