




250A 415V 3 Pole Load Break Switch

- Rated Current; 250A
- Rated Voltage; 415V
- DIN rail Mountable
- Rated Impulse withstand Voltage; 4kV
- Safe Isolation of main circuit
- Fits directly to eureka 250A EMS Style chassis
- Padlockable (EUR-3-250PD-Padlock attachment)
- Design and tested in accordance with IEC 60947-3:2008
- Compliances: RoHS




Properties	
Manufacturer	Eureka
Product Range	Eureka Compact Load Break Switch
Utilisation Category	AC-23A
Rated Operational Voltage U_e	415 V
Rated Operational Current I_e	250 A
Rated Frequency	50 Hz
Rated Insulation Voltage U_i	500V
Rated Impulse withstand Voltage U_{imp}	4kV AC peak
Rated Duty	Uninterrupted
Rated Short-time Withstand Current I_{cw}	3kA for 1s
Rated Short Circuit Making Capacity I_{cm}	5kA
Electro-mechanical endurance	10000 cycles
Standards Compliances	IEC 60947-3:2008+A1:2012+A2:2015


Dimensions

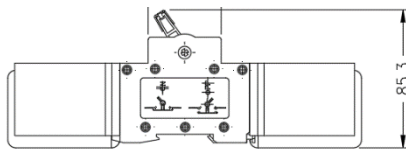


FRONT VIEW

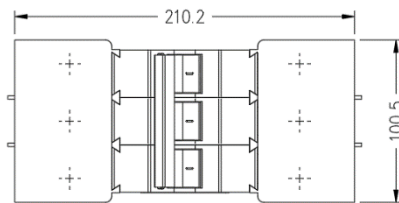


TOP VIEW




R/SIDE VIEW

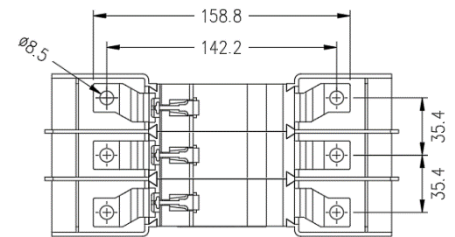

REAR VIEW



L/SIDE VIEW

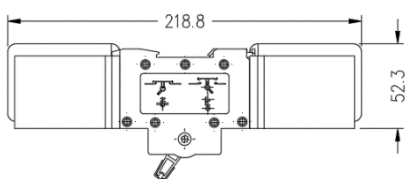

FRONT VIEW