



EUR-DH48S-S


Eureka Multi-Range Twin Timer

- Wide time ranges from 1 seconds to 99 minutes
- Ability for T1, T2 can replace 2 relays
- High accuracy, small volume, high reliability
- Working modes: loop around, one time.


Properties

Properties		
Manufacturer	Eureka	
Product Range	Eureka Multi-Range Twin Timer	
Time Range	1 seconds to 99 minutes	
Rated Supply Voltage	100 - 240 VAC	
Operating Voltage Range	85% to 110% of rated supply voltage	
Rated Frequency	50 / 60Hz	
Contact Rating	250 VAC 5A Resistive Load	
Reset Time	Less than 0.1 seconds	
Power Consumption	Approximately 2 VA (1.6W)	
Endurance	Mechanical	10000000 Operations
	Electrical	100000 Operations
Pin Configuration	8 pins	
Ambient Temperature	-10°C~+50°C	
Ambient Humidity	Maximum- 85% RH	
Available Modes	1C	
Accessories	Y48; Panel Mount Adapter	
	US-08; Round 8 Pin Base	
	P2CF-08; Round 8 Pin Base with Clips	
	P3G-08; 8 Pin Base Back Wired	


Wiring Diagram

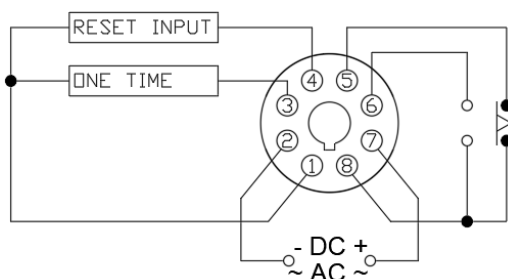


Informational Diagram

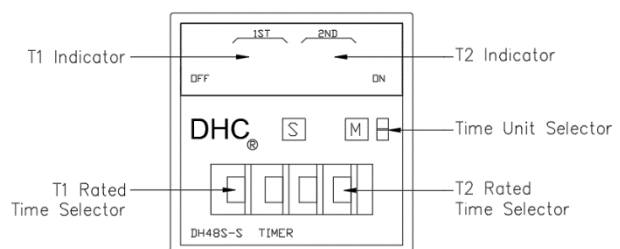


Timing Chart for EUR-DH48S-S

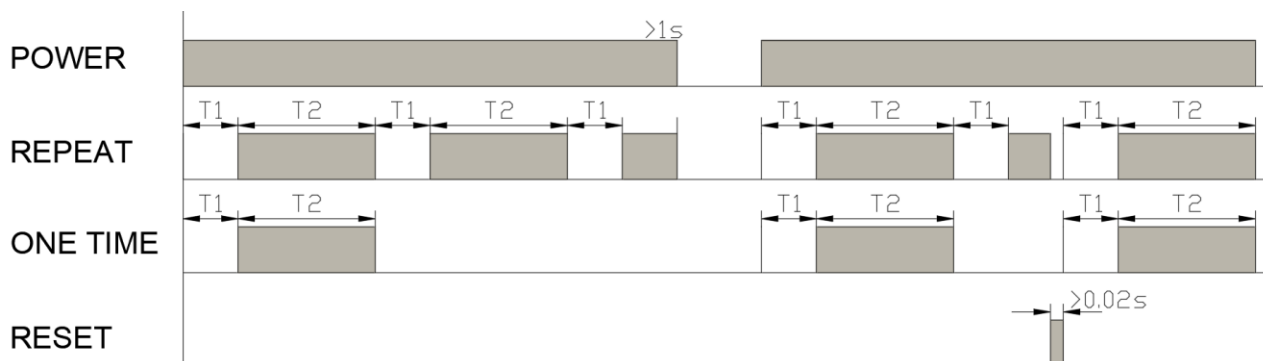


Dimensions for EUR-DH48S-S



FRONT VIEW

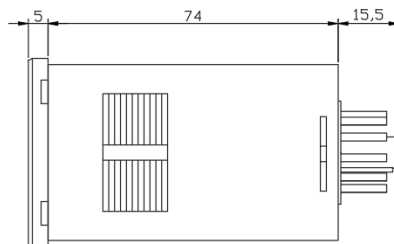


SIDE VIEW




PANEL MOUNT CUT-OUT

Dimensions for Y48




FRONT VIEW




SIDE VIEW


Dimensions for P2CF-08




FRONT VIEW



SIDE VIEW



MOUNTING HOLE




EUR-DH48S-S + P2CF-08

Catalogue number: **EUR-DH48S-S**


Eureka Multi-Range Twin Timer 1sec – 99 minutes




Dimensions for US-08




FRONT VIEW



SIDE VIEW




REAR VIEW

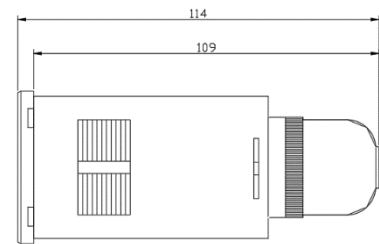


EUR-DH48S-S + US-08


Dimensions for P3G-08




FRONT VIEW



SIDE VIEW



REAR VIEW



EUR-DH48S-S + P3G-08

