


Catalogue number: **LS63050-□□□□-SSL**


630A 3 Phase Single Sided MCCB Chassis



LS63050-6TF-SSR

630A 3 Phase Single Sided MCCB Chassis


- Current Rating: 630A
- Encapsulated Busbar
- IP Rating: IP20
- Rated Short-time withstand Current: 50kA for 0.5s
- Available in top feed (TF) and dual feed (DF)
- Phase stickers will be loose supplied with the chassis, please paste them as per the preferred orientation.
- Complies to AS/NZS 61439.1, AS/NZS 61439.2

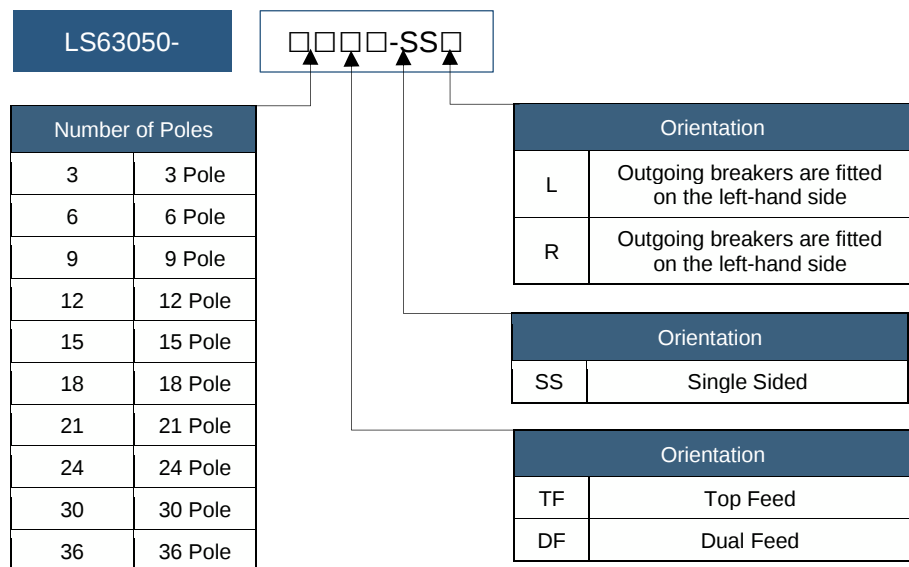

Properties

Properties		
Manufacturer	Eureka	
Product Range	Eureka 630A Single Sided MCCB Chassis	
Chassis Type	630A Encapsulated Busbar Chassis	
Compatible Product Series	LS MCCB's : TS100, TS160, TS250	
IP Rating	IP20	
Busbar Dimensions	40x6.35mm ² Cu	
Pitch	35mm	
Rated Current	In	630A
Rated Operating Voltage	Un	415V
Rated Insulation Voltage	Ui	690V
Rated Impulse Withstand Voltage	6kV	
Rated Frequency	50/60Hz	
Rated Short-time withstand Current	Icw	50kA for 0.5s
Standard Compliances	AS/NZS 61439.1, AS/NZS 61439.2	

Dimensions for Top Feed

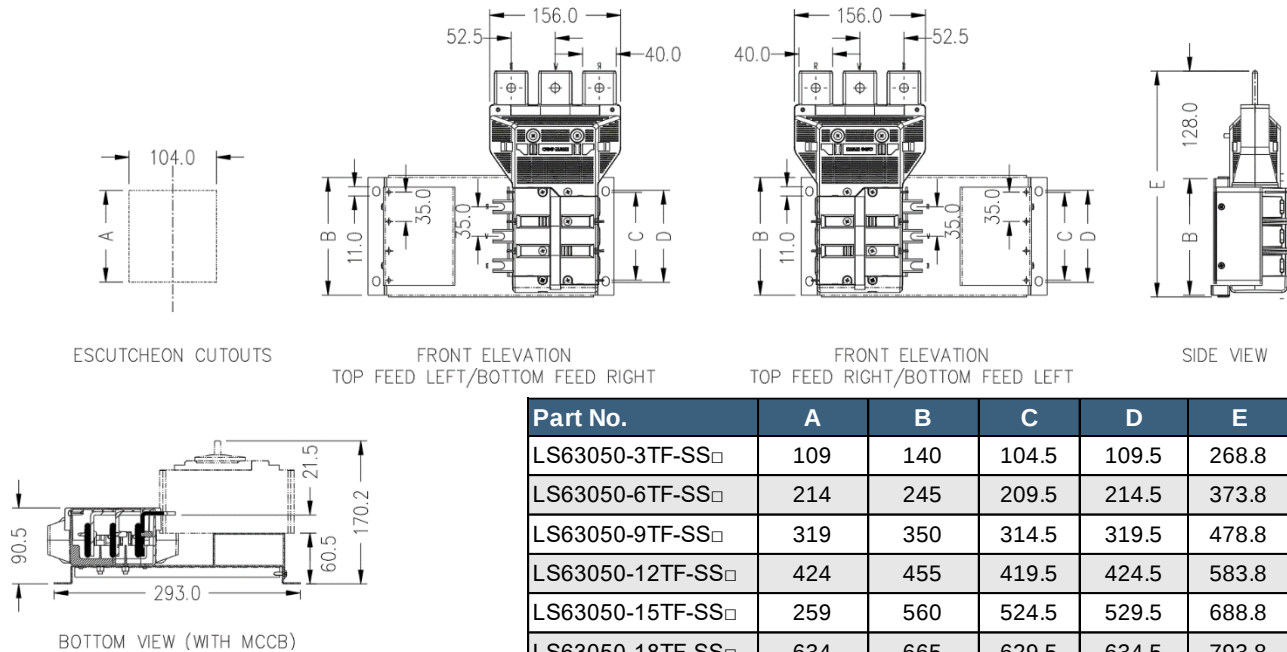

Dimensions for Dual Feed

