


Catalogue number: T□□□-□□□-□□□

Special Transformers 240-415V to 12-240V 20-800VA



Standard Transformer 240-415V to 12-240V

- Input Voltage: 240-415VAC
- Output Voltage: 12-240VAC
- IP Rating: IP2X
- Low loss Iron Core
- Separate Insulated Windings
- Slotted holes for fast Installation
- Manufactured to AS/NZS 61558

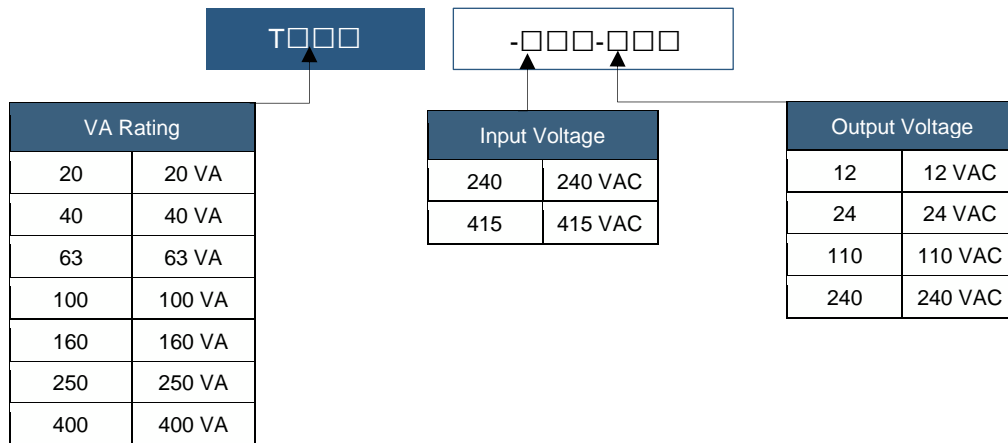

## Properties

Properties	
Manufacturer	Eureka
Product Range	Eureka Special Voltage Transformers
IP Rating	IP2X
Input Voltage	240,415 VAC
Output Voltage	12,24,110,240 VAC
VA Rating	20,40,63,100,160,250,400
Frequency	50/60Hz
Voltage Compensation on primary	+/-5%
Temperature Rise	60°C
Insulation	Class F (155°C)
Enclosure Finishes	Powder Coated Steel Polycarbonate
Standards	AS/NZS 61558




Catalogue number: T□□□-□□□-□□□

Special Transformers 240-415V to 12-240V 20-800VA



### Weight and Dimensions

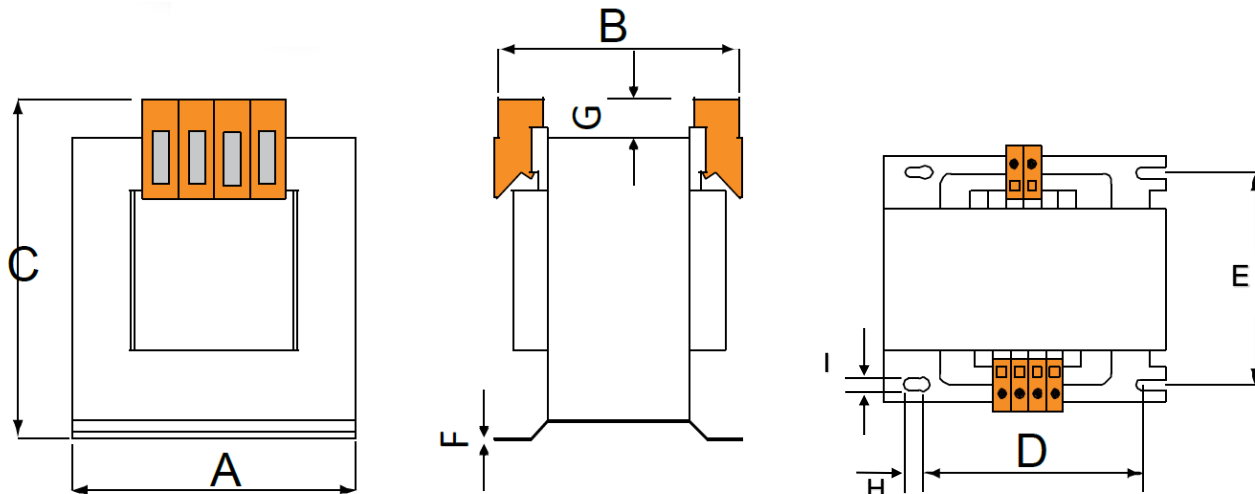

Part No.	Weight	Dimensions/mm								
	Kg	A	B	C	D	E	F	G	H	I
T20-415-24	0.9	67	58	65	70	N/A	1.0	24	8	5
T20-415-240	0.9	67	58	65	70	N/A	1.0	24	8	5
T40-415-240	1.4	78	72	95	56	46	1.2	18	8	4.6
T63-415-24	1.5	78	72	95	56	46	1.2	18	8	4.6
T63-415-240	1.5	78	72	95	56	46	1.2	18	8	4.6
T63-240-110	1.5	78	72	95	56	46	1.2	18	8	4.6
T100-415-24	1.9	87	75	98	64	62	1.5	16	8	4.6
T100-415-240	1.9	87	75	98	64	62	1.5	16	8	4.6
T100-240-110	1.9	87	75	98	64	62	1.5	16	8	4.6
T160-240-12	2.5	87	75	98	84	74	1.5	16	10	5.8
T250-415-240	3.4	96	92	110	84	85	1.5	16	10	5.8
T250-240-110	3.4	96	92	110	84	85	1.5	16	10	5.8
T250-415-110	3.4	96	92	110	84	85	1.5	16	10	5.8
T400-415-240	5.6	120	100	130	90	85	2	16	10	5.8

NOTE: T20-240-20; DOES NOT HAVE ±5% TAPS, MOUNTING BY 2 POINT SADDLE BRACKETS.



N.A.W. Controls Pty. Ltd.  
 Telephone: (03) 9464 6555  
[www.nawcontrols.com.au](http://www.nawcontrols.com.au)

Eureka Special Voltage Transformers  
 September 2020