

# suprema BioEntry W2

Outdoor IP Fingerprint Device



## | BioEntry W2 |

Suprema BioEntry W2 is a rugged fingerprint access control device featuring Suprema's next generation biometric technology and security platform. BioEntry W2 provides class-leading performance and security by featuring Suprema's latest fingerprint algorithm coupled by powerful quad-core CPU and LFD (live finger detection) technology. The device also provides added flexibility in system design by featuring multi card reading with dual-frequency RFID technology. Packed in a rugged IP67/IK08 housing with sleek metallic finish, BioEntry W2 is a perfect access control solution for tough environment and outdoor installation.



# suprema

## BioEntry W2

### Outdoor IP Fingerprint Device



#### Features



##### Best-in-class Performance

- Latest Suprema algorithm
- 1.2GHz quad-core CPU



##### Improved Accuracy & Security

- New advanced Live Finger Detection(LFD) technique
- High-precision OP5 optical sensor



##### Expanded Capacity

- Max. 500k users/1 million text logs
- Large memory: 2GB Flash + 256 MB RAM



**IP67  
IK08**

##### Rugged Structure

- IK08 impact protection
- IP67 ingress protection
- Ideal for outdoor installation



##### Multi RFID Card Reading

- LF(125KHz), HF(13.56MHz) dual-band
- Reads all card types that HID multiCLASS supports (EM/HID Prox/MIFARE/iCLASS/DESFire/FeliCa/NFC)


#### Specifications

**IP67 IK08**


Biometric	Fingerprint
Sensor Type	Optical Sensor (OP5)
Template	SUPREMA / ISO 19794-2 / ANSI 378
Extractor / Matcher	MINEX certified and compliant
LFD	Supported
RF Option	BEW2-OHP
	BEW2-ODP
	BEW2-OAP
	125 KHz HID Prox
	125KHz EM 13.56MHz MIFARE,FeliCa,NFC
	125 KHz EM/HID Prox 13.56 MHz MIFARE/DESFire(EV1) /FeliCa/NFC/iCLASS(5E)
CPU	1.2 GHz Quad Core
Memory	2GB Flash + 256 MB RAM
Max. User	500,000 (1:1), 100,000(1:N)
Max. Template	1,000,000(1:1), 200,000(1:N)
Max. Logs	1,000,000(text)
LED	Multi-Color
Sound	Multi-tone Buzzer
Ethernet	10/100 Mbps, auto MDI/MDI-X
RS-485	1ch host or slave (selectable)
Wiegand	1ch input or output (selectable)
TTL	2ch input
Relay	1 Relay
PoE	IEEE802.3af
Ingress Protection	IP67
Impact Protection	IK08
Tamper	Supported
Power	Voltage: DC 12V Current: Max. 600 mA
Operating Temperature	-20°C ~ 50°C
Operating Humidity	0% ~ 80%, non-condensing
Dimensions (WxHxD, mm)	50 x 172 x 43.5
Unit Weight	251g
Certificates	CE, FCC, KC, RoHS, REACH, WEEE

#### System Configuration


##### • Standalone

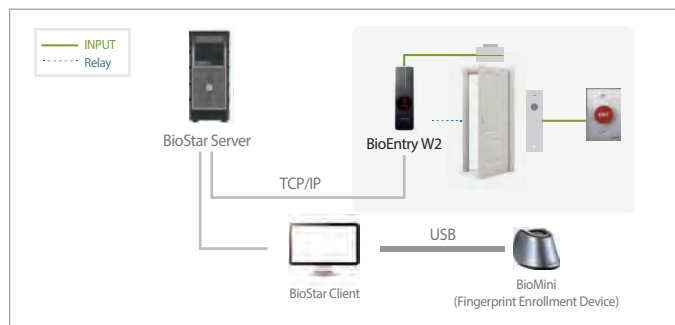

##### • Standalone-Secure

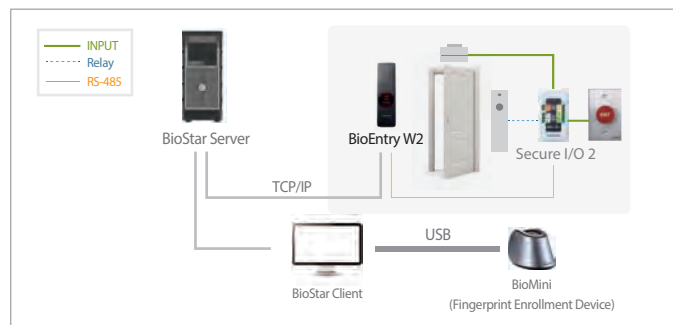

##### • Distributed Access Control Systems

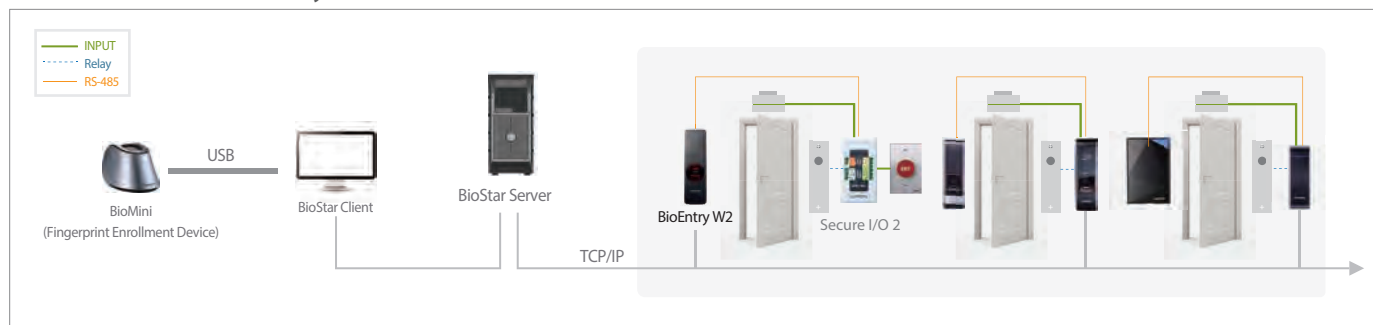

#### Suprema Inc.

17F Parkview Tower, 248, Jeongja 1ro, Bundang-gu, Seongnam-si, Gyeonggi-do, 463-863 Rep. of KOREA

Tel : +82-31-783-4502 Fax : +82-31-783-4503

E-mail : sales@supremainc.com

