

# DS-KD-KK Video Intercom Nametag Module

**HIKVISION**




## Key Feature

- Dial the resident at one touch
- Backlight compensation
- Easy to and extend

ROHS	2011/65/EU
REACH	Regulation (EC) No 1907/2006
WEEE	2012/19/EU

## Typical Application

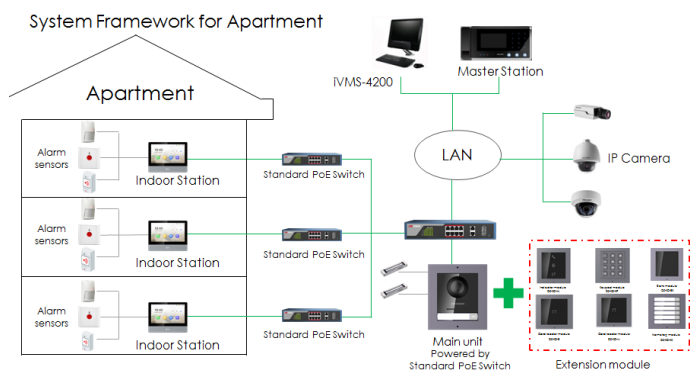


## Approval

CE-EMC	<ul style="list-style-type: none"> <li>a. EN 55032:2015</li> <li>b. EN 61000-3-2:2014</li> <li>c. EN 61000-3-3:2013</li> <li>d. EN 50130-4:2011 +A1:2014</li> </ul>
CE-LVD	EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013
CB	IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013
FCC-SDOC	47 CFR Part 15, Subpart B
C-TICK(EMC)	AS/NZS CISPR 32:2015
UL	UL 60950-1 & CAN/CSA C22.2 No. 60950-1-07, Information Technology Equipment – Safety – Part 1: General Requirements

## Specification

System parameters	
Processor	Embedded MCU Processor
Interfaces	
Module-connecting	2 (1 input, 1 output)
Debug	1
General	
Physical button	6
DIP switch	8
Power supply	Powered by DS-KD8003-IME1
Power consumption	≤ 2 W
Working temperature	-40° C to +55° C (-40° F to 131° F)
Working humidity	10% to 95%
IP protection level	IP65
Installation	Flush mounting, surface mounting
Dimension	98.2 mm × 100.2 mm × 33.7 mm (3.87" × 3.95" × 1.33")
Weight	438 g (with packaging) 190 g (without packaging)

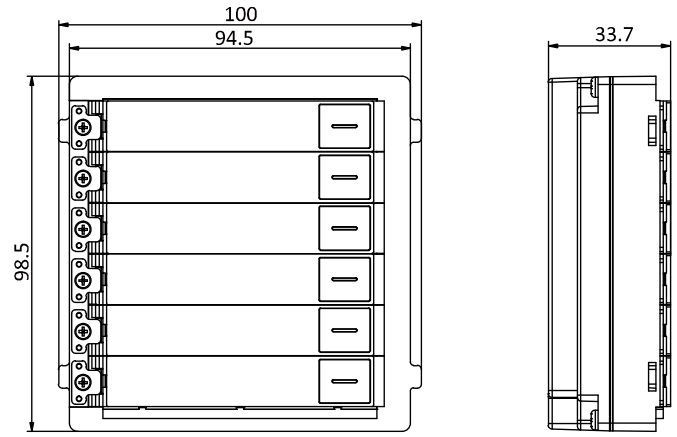


## Accessory

### Optional




DS-KD-ACF1/Plastic



DS-KD-ACF2/Plastic



DS-KD-ACF3/Plastic



DS-KD-ACW1



DS-KD-ACW2




DS-KD-ACW3

## Available Model

DS-KD-KK

## Appearance and Interfaces

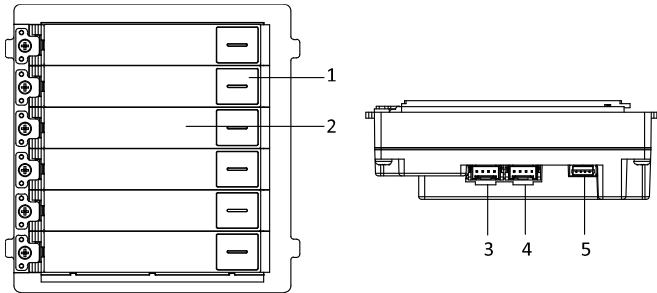

No.	Description
1	Call Button
2	Nametag
3	Module-connecting Interface (output)
4	Module-connecting Interface (input)
5	Debug Port

## Dimension



Distributed by



**HIKVISION**

Distributed by:



[www.netdigital.com.au](http://www.netdigital.com.au)