


# DS-KH9310-WTE1

## Video Intercom Network Indoor Station

HIKVISION

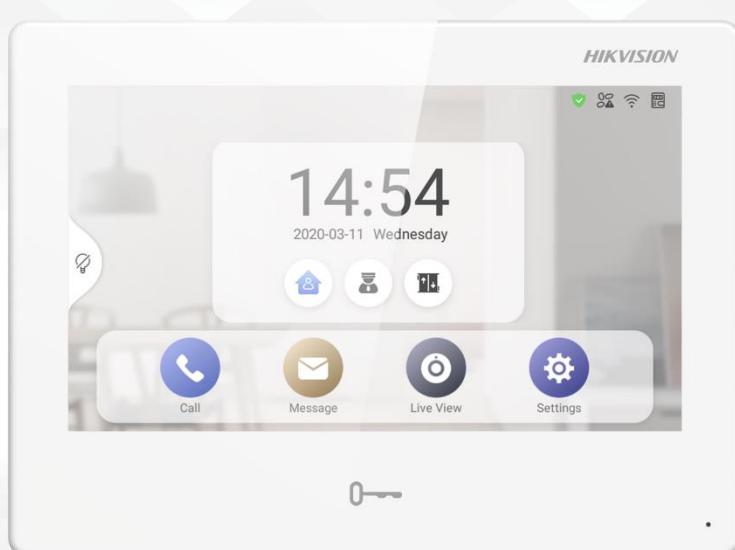

### Key Feature

- 7-inch colorful touch screen with resolution 1024 × 600
- UI V2.0: User friendly design
- Plug & play
- Standard PoE
- Receives video call and unlocks via the client software or the mobile client remotely
- Supports link to hikvision devices to build a management center

## Specification

### System parameters

Memory	1 GB
Flash	4 GB Emmc

### Display parameters

Display screen	7-inch colorful TFT touch screen
Display resolution	1024 × 600

Operation method	Capacitive touch screen
Brightness	Adjustable

### Audio parameters

Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker

Audio compression standard	G.711 U, G.711 A
Audio quality	Noise suppression and echo cancellation

### Network parameters

Wired network	10/100 Mbps self-adaptive
Wireless network	Wi-Fi 802.11 b/g/n

Network protocol	TCP/IP, SIP, RTSP
------------------	-------------------

### Interfaces

Network port	RJ45
RS-485	1

Alarm in	8
Button	1

TAMPER	1
Alarm out	2 relay

Debugging port	1
Micro USB	For debug only


### General

Power supply	12 VDC & standard PoE, IEEE 802.3af
Power consumption	≤ 8 W


Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90%

Dimensions	187 mm × 137 mm × 25.7 mm (7.36" × 5.39" × 1.01")
Weight	419.3 g (without package) 694 g (with package)

## Dimension

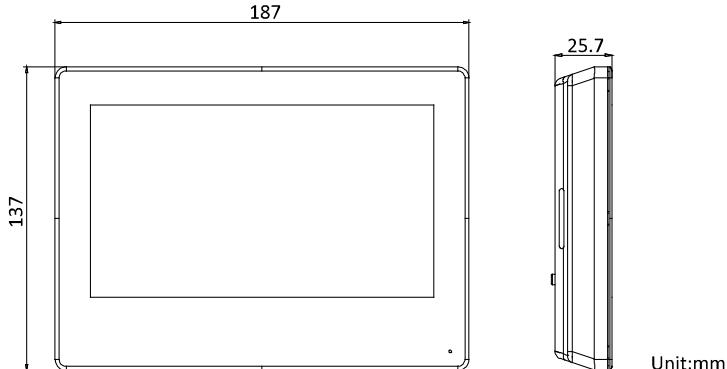

## Appearance and Interfaces

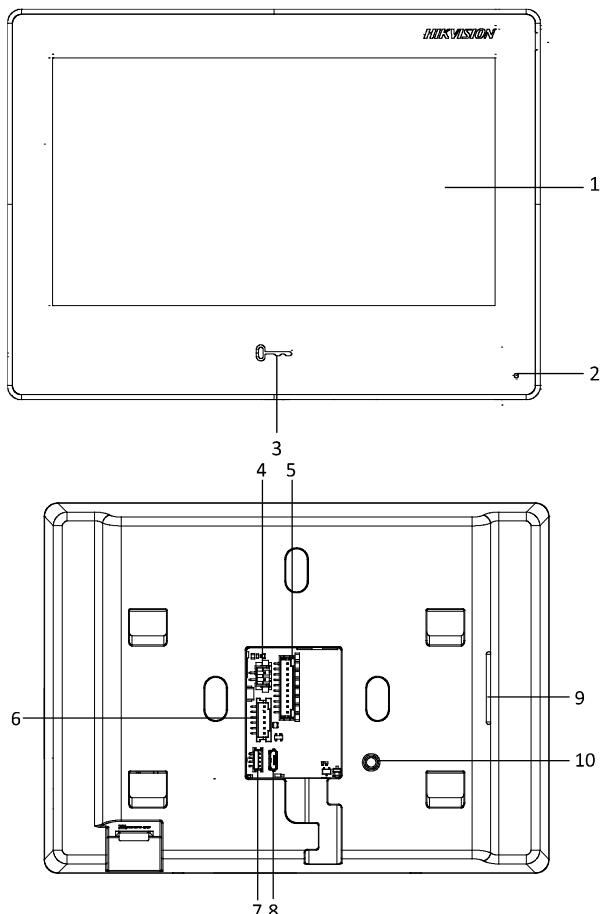

No.	Description	No.	Description
1	Display Screen	6	RS-485/Relay Interface
2	Microphone	7	Debugging Port
3	Unlock Button	8	Micro USB Interface
4	Power Terminal	9	Loudspeaker
5	Alarm Terminal	10	TAMPER

## Available Model

DS-KH9310-WTE1



**HIKVISION**

Distributed by:



[www.netdigital.com.au](http://www.netdigital.com.au)