

### DESCRIPTION

The IXW-MAA is a multi-purpose adaptor for the IX Series with four contact inputs and ten relay outputs. The inputs can be used to send a command to a specific station to perform a task. The relay outputs are assigned to a specific station and programmed to change state when relay output 1 or 2 on the associated station changes state.

The IXW-MAA is surface mounted directly to the wall through the mounting points on either side, or it can be mounted on a standard, 35mm x 170mm DIN rail. The DIN rail is included with the station. Wire terminations connect directly to the inputs and outputs on the station.

The IXW-MAA is programmed as an IXW-MA in IX Support Tool.


### FEATURES

- 802.3af PoE
- Four contact inputs
- Ten Form C relay outputs
- 24V AC/DC 500mA relay contact rating
- Mounts to the included 35mm x 170mm DIN rail or directly to a wall

# IXW-MAA

## Multi-Purpose Adaptor for the IX Series

### FEATURE CALL-OUT

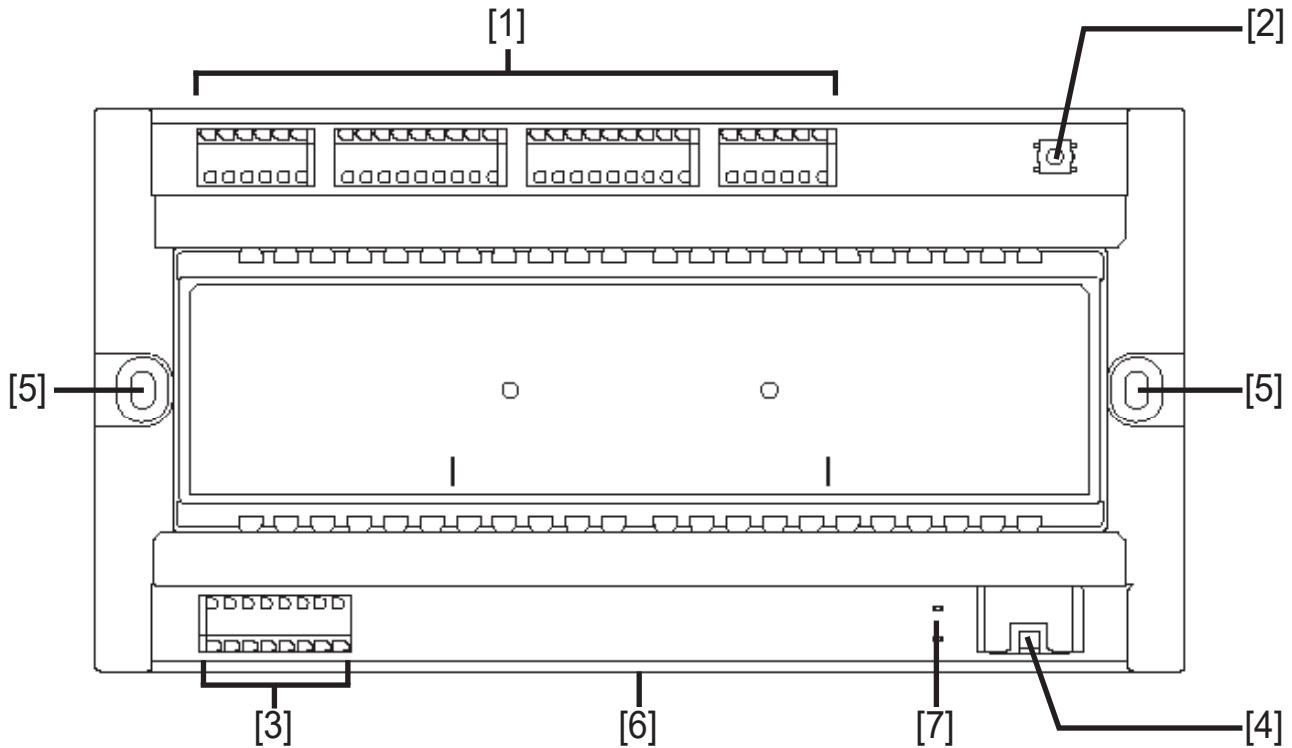

### FEATURE CALL-OUT DEFINITIONS

- [1] Contact outputs 1-10
- [2] Reset button
- [3] Contact inputs 1-4
- [4] LAN port
- [5] Mounting point
- [6] DIN rail mount (on back of adaptor)
- [7] Status indicators

### SPECIFICATIONS

<b>Power Source:</b>	PoE (IEEE 802.3af class 0)
<b>Power Draw:</b>	4.48 Watts (Max)
<b>Relay Output Method:</b>	10 Form C Dry Relays
<b>Relay Output Rating:</b>	24V AC/DC 500mA
<b>LAN:</b>	Ethernet (10BASE-T, 100BASE-TX)
<b>Protocols:</b>	IPv4, IPv6, TCP, UDP, HTTP, HTTPS, SMTP, SFTP, DHCP, NTP, DNS
<b>Port Security:</b>	IEEE 802.1X
<b>Operating Temp:</b>	14° ~ 122°F (-10° ~ 50°C)
<b>Dimensions:</b>	108.5mm H x 210mm W x 61mm D
<b>Din Rail Mount (included)</b>	35mm W x 170mm L