

# KLL-EH-OS-M29-ANZL



4.3" Touch Screen, 2MP, IP54, 24V Non-Standard PoE, 1 Channel, Access Fob, Facial Recognition, Passcode, 2-Way Talk, Wired Connection, Black



## KONEC M29 OUTDOOR STATION

SKU: KIC00051

Stay connected to your doorbell at anytime with seamless remote access. It offers innovative entry options for residents, including face recognition, passcodes, and access fobs via electric strike and more.

Scan the QR Code to download Arks by Konec Solutions App



## FEATURES



### VIDEO INTERCOM

Provides high-definition video communication with the indoor control panel and app, enabling remote door unlocking with a single touch.



### 4.3" TOUCH SCREEN

Equipped with built-in sensitive 4.3" touch screen.



### MULTIPLE UNLOCKING

Multiple unlocking methods include: Facial Recognition, Access Fob & Password via Wired Strike.


\* Unlocking methods must be configured.




### ANTI-SPOOFING

2MP Infrared Illumination Dual-lens Camera with deep learning algorithm can detect fake image or video impersonations.


## M29 DIMENSIONS

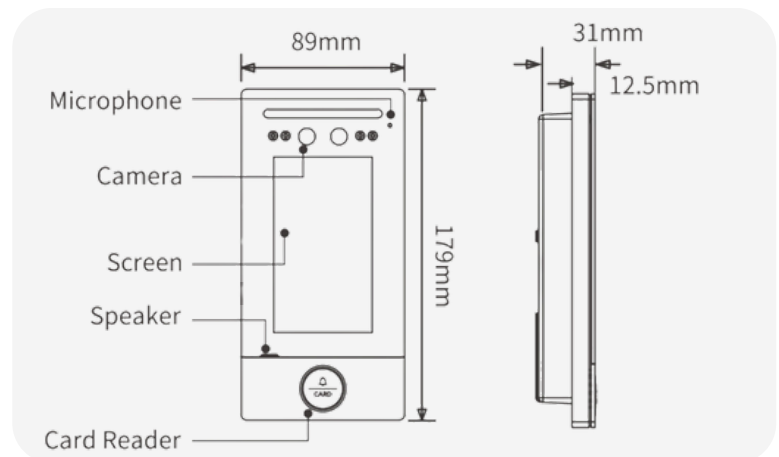

## EMBEDDED BOX DIMENSIONS

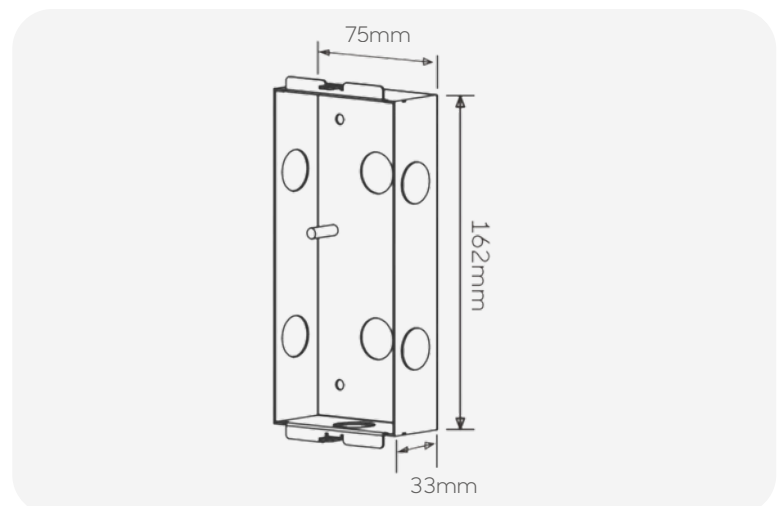

# SPECIFICATIONS

General Specifications		Video Specifications	
Colour	Gray	Video Encoding	H.264
Input Voltage	DC12V - 24V	Video Pixels	VGA, 720p
Operating Temperature	-30° C ~ 60°C	Camera	2MP
Power Consumption	Standby: ≤4.7W Max. ≤7W	Field of View	86° (H) / 46° (V)
Weight	370g	Fill Light	White
Installation	Flush mounting	Audio Specifications	
Protocol	TCP/IP, UDP, HTTP, DNS, RTP	Audio Encoding	G.711
IP Rating	IP54	Speaker	Built-in Loudspeaker
Dimensions	89 x 179 x 30.5mm 75 x 161 x 33mm (embedded box)	Microphone	-56±2dB
Capacity	Face: 20,000 Card: 50,000	System Specifications	
Display Specifications		Operating System	Linux
Display Size	4.3"	ROM	4GB
Screen Type	Touch Screen	RAM	512MB
Resolution	480 x 272	Device Interface	
POE Power Supply Specifications		Network Port x 1	Wiegand Port x 1
Power	Input: 100-240V, 50/60Hz, 0.6A	RS485 Port x 1	Door_Status/ Gnd Port x 1
	Output: 24V, 1A	Power +/- Port x 1	Open_Door/ Gnd Port x 1
	 Non-standard PoE Power Supply.	Relay Port x 1	Set up button x 1
		Fire Detection Port x 1	

## Disclaimer

This document provides technical specifications for the Konec M29 Outdoor Station and is intended for reference only. Product specifications, features, and visuals may change without prior notice. For the most current product specifications, visit [www.konechome.com.au](http://www.konechome.com.au). Konec Solutions Pty Ltd makes no guarantees regarding the completeness, accuracy, or currentness of this document. Users are responsible for verifying compatibility, suitability, and compliance with local regulations before purchase, installation, or use. To the extent permitted by law, Konec Solutions disclaims any liability for direct, indirect, incidental, or consequential damages resulting from reliance on this document.

Nothing in this disclaimer limits or excludes your rights under the Australian Consumer Law or the New Zealand Consumer Guarantees Act 1993.

Konec Solutions Pty Ltd.  
<https://www.konechome.com.au/>  
 1300 2 56632 (1300 2 KONEC)  
[info@konec.com.au](mailto:info@konec.com.au)