

Open Frames

Features

- Modular design, easily disassembled and assembled to ensure low delivery costs
- Various optional accessories which include:

Cable management systems

Shelves

Blanking plates

Power distribution units



Standards

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41491 part 1,
DIN41494 part 7 standard

Loading capacity


Static loading: 150KG

Degree of protection

IP20

Surface finish

Powder coated

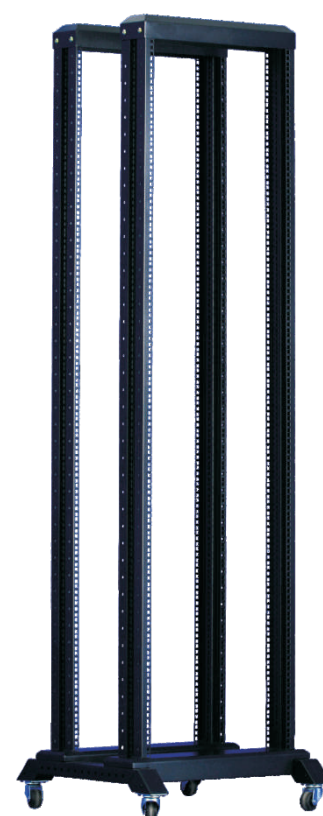

Specifications

Model	Capacity	Width (mm)	Depth (mm)	Height (mm)	Weight (kg)
OR.6642	42RU	600	600	1935	25
DR.6642				2020	29

Specifications are subject to change without prior notice.

