





**Application**

(CP-32\_LED Series)

**Statement**

Resettable call point, with double poles change over contacts from N/C to N/O. The main function is to override the electrical locking/release devices in case of emergency. With Key to reset the switch.

The resettable call point comes with hinged front cover to prevent the unit from activating randomly. Lock/Unlock instructed plates to show the status of the switch and also with the optional LED version to indicate the direction of the call point.

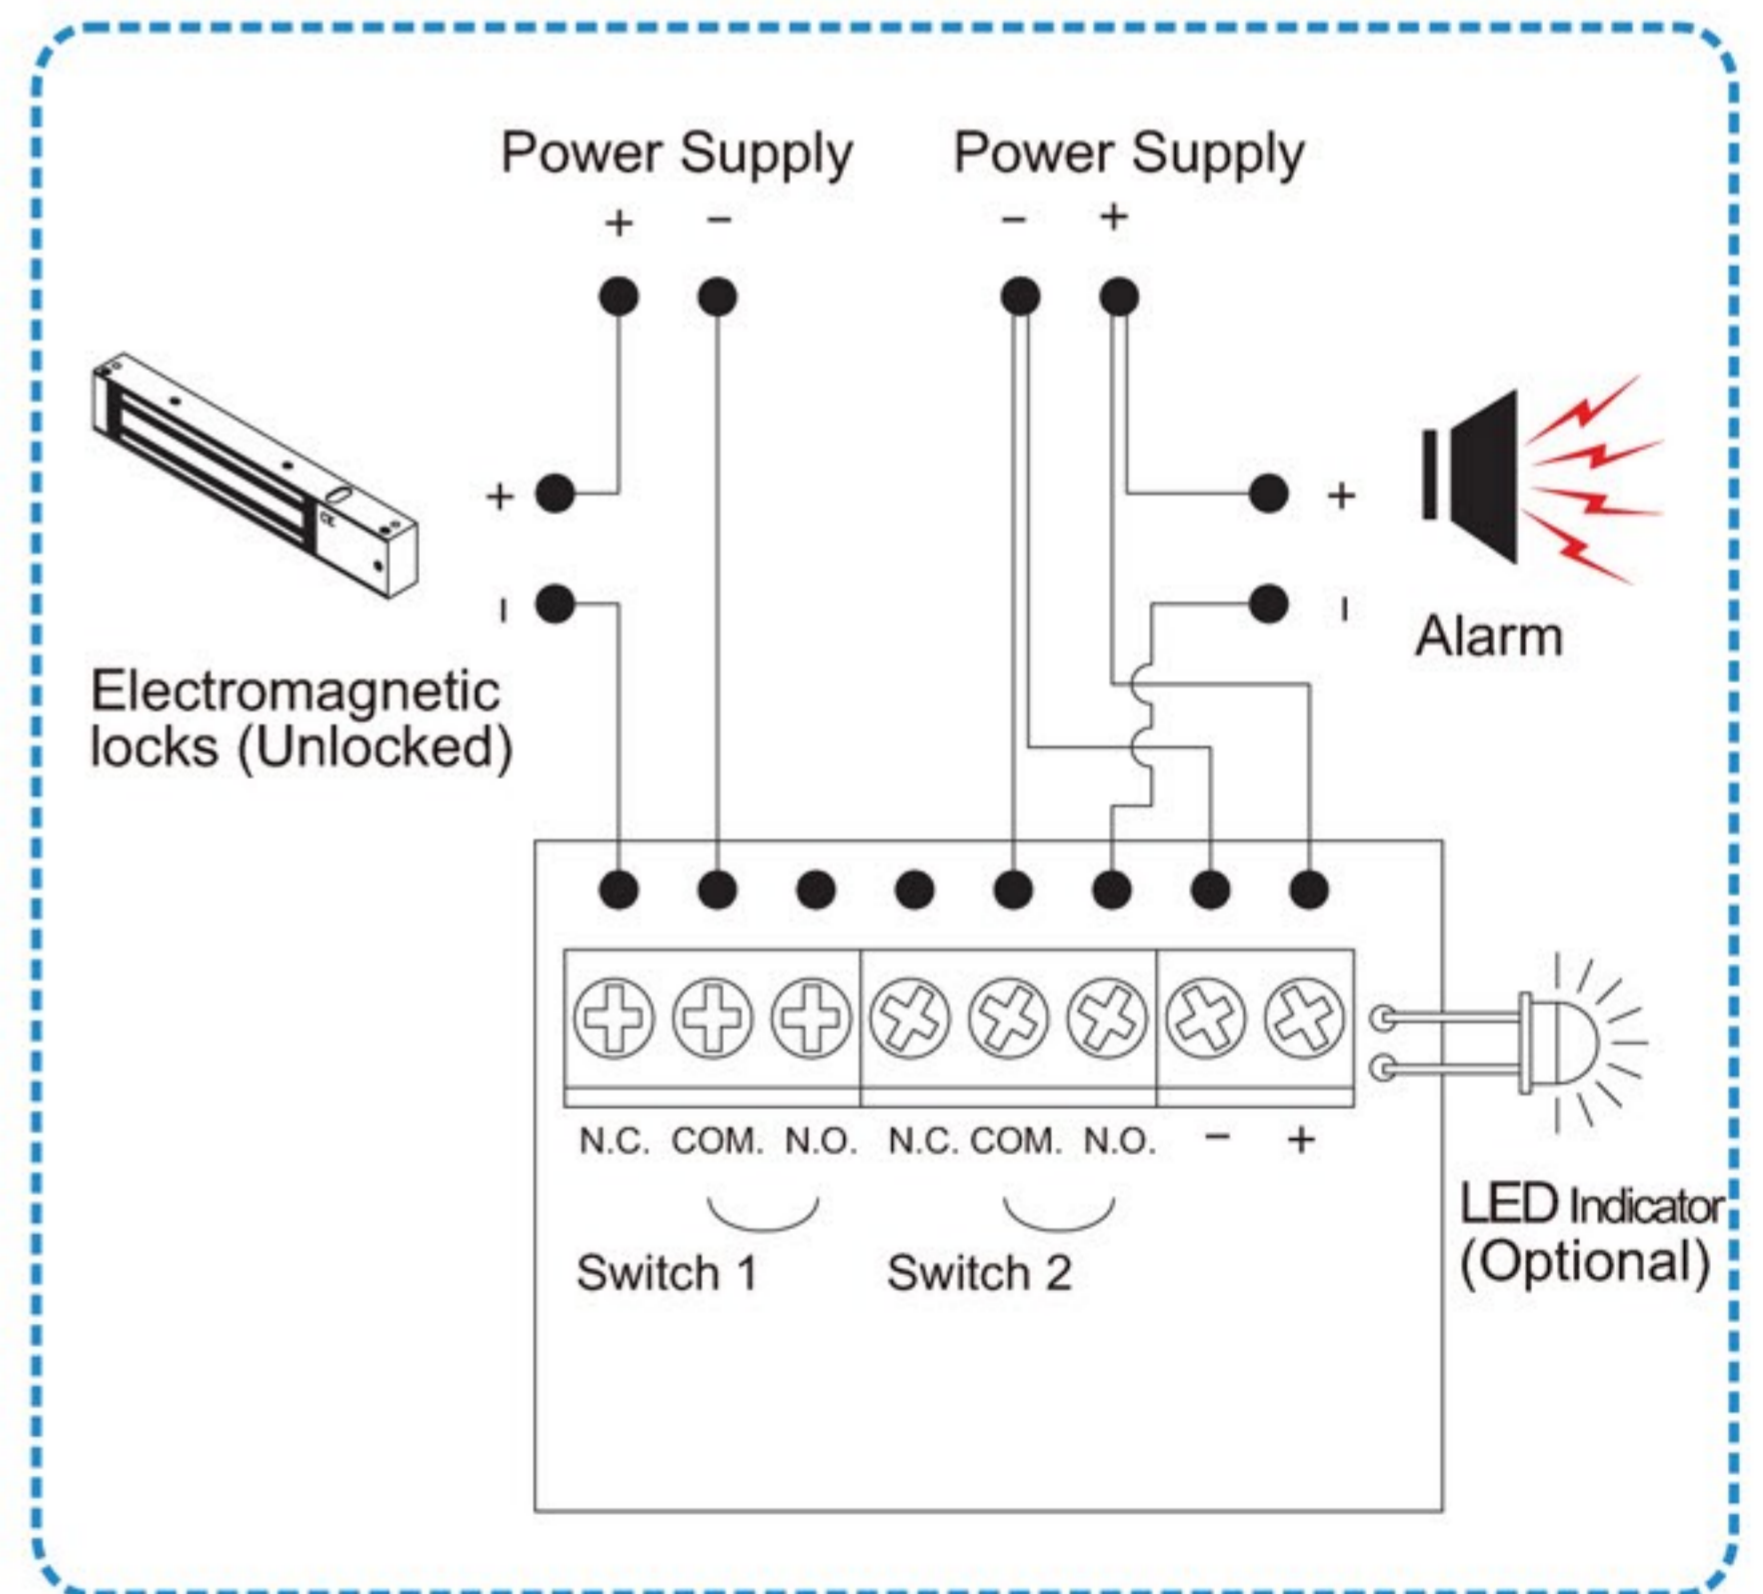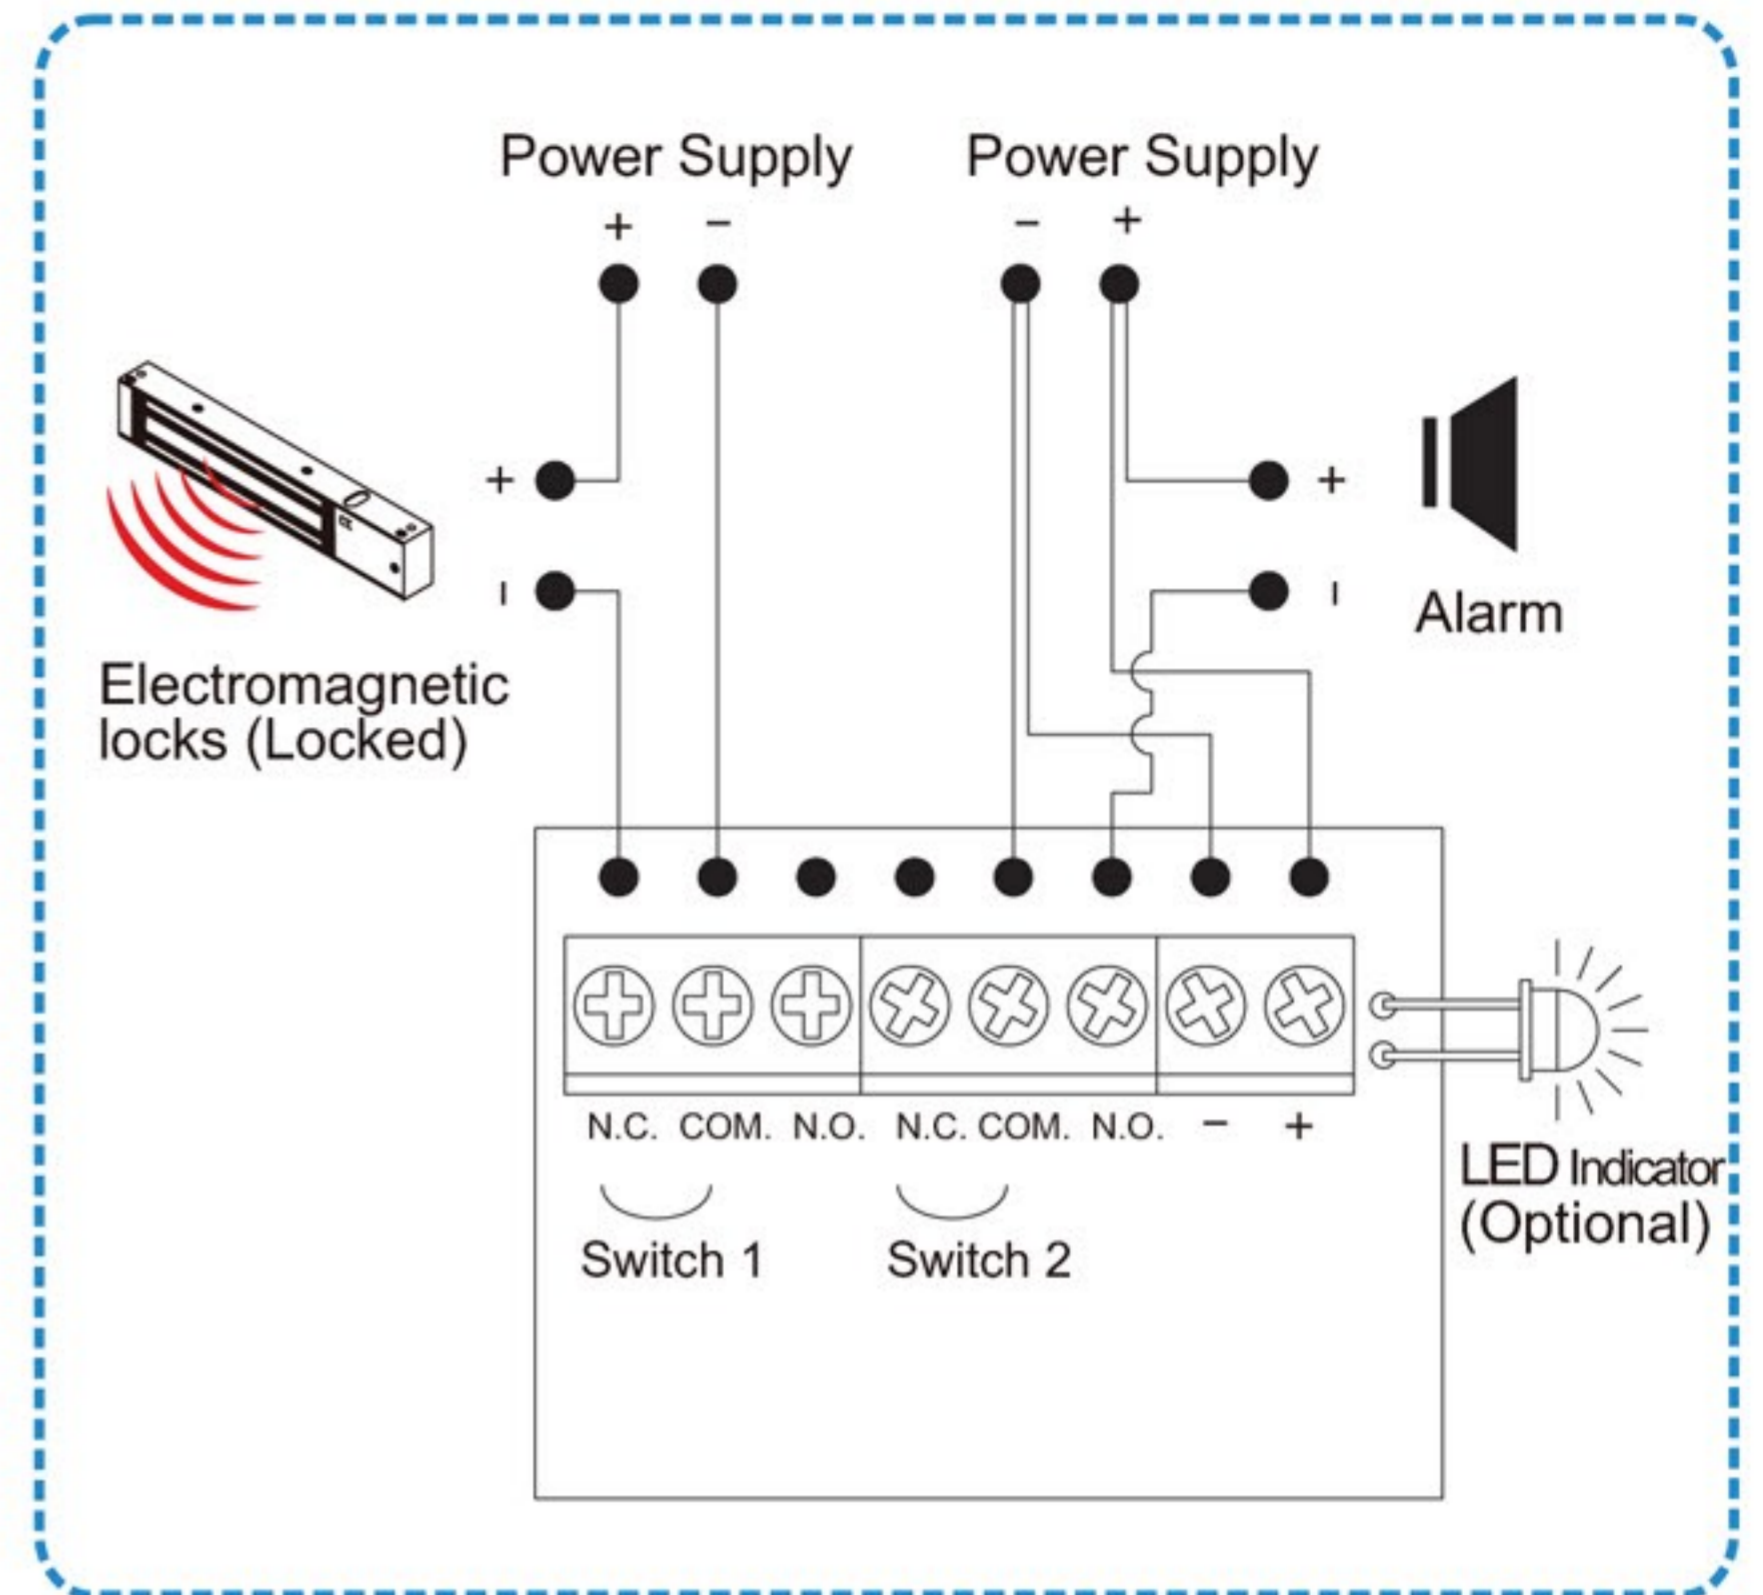

**Specifications**

- Dimensions: 87x91x53 mm
- LED indicator (Optional)
- Switch rating: 5A/125/250 VAC
- Switch: Double pole

**Dimension**

