

# CS1734A



- 4-Port USB KVMP™ Switch
- CS1734A KVM Switch has built-in USB on each of the front and rear panels and audio signal connectors. It allows users to control the computer and peripheral devices via a signal console at ease.




## Features

- One USB console controls 4 computers and two additional USB devices
- 2 port USB Hub built in
- Dual interface supports computers with PS/2 or USB keyboards and mice
- Multiplatform support: compatible with all operation platforms PC (Windows, Linux and most others), Mac and Sun
- With speaker and microphone support
- [Bi-directional switching and flexible interoperability: switch permits independent PC, independent peripheral, and independent audio function, regardless of KVM switch focus](#)
- Auto PS/2 and USB interface detection
- Buzzer On/Off via hotkey
- Keyboard and mouse emulation for error free booting
- Computer selection via front panel pushbuttons and hotkeys
- Superior video quality - up to 2048 x 1536; DDC2B
- Firmware upgradable
- OS Support: Windows 2000, Windows XP, [Windows Vista](#), LINUX, Mac, Sun and FreeBSD
- SUN/Mac keyboard support and emulation\*
  - \*1.PC keyboard combinations emulate SUN/Mac keyboards.
  - \*2.SUN/Mac keyboards only work with their own computers

## Specification

Computer Connections		4	
Port Selection		Hotkeys, Pushbutton	
USB Port/Audio Port Selection		Hotkey	
Connectors	Console Ports	Keyboard	1 x USB Type A Female (White)
		Video	1 x HDB-15 Female (Black)
		Mouse	1 x USB Type A Female (White)
		Speaker	1 x Mini Stereo Jack Female(Green)
		Microphone	1 x Mini Stereo Jack Female (Pink)
	KVM Ports		4 x SPHD-15 Female (Yellow)
		Speaker	4 x Mini Stereo Jack Female (Green)
		Microphone	4 x Mini Stereo Jack Female (Pink)
	USB Hub		2 x USB Type A Female (Black)
	F/W Upgrade		1 x RJ11 Female (Black)
Power		1 x DC Jack	
Switches	Port	4 x Pushbutton	
	F/W Upgrade	1 x Slide	
LEDs	On Line/ Selected	4 (Orange)	
	USB Link	4 (Green)	
Emulation	Keyboard/Mouse	USB	
Video		2048 x1536; DDC2B	
Scan Interval		1~99 seconds	
Power Consumption		DC5V, 1.25W	
Environment	Operating Temp.	0~50°C	
	Storage Temp.	-20~60°C	
	Humidity	0~80% RH, Non-densing	
Physical Properties	Housing	Metal	
	Weight	0.70 kg	
	Dimensions ( L x W x H )	21.00 x 8.70 x 5.50 cm	

# Diagram

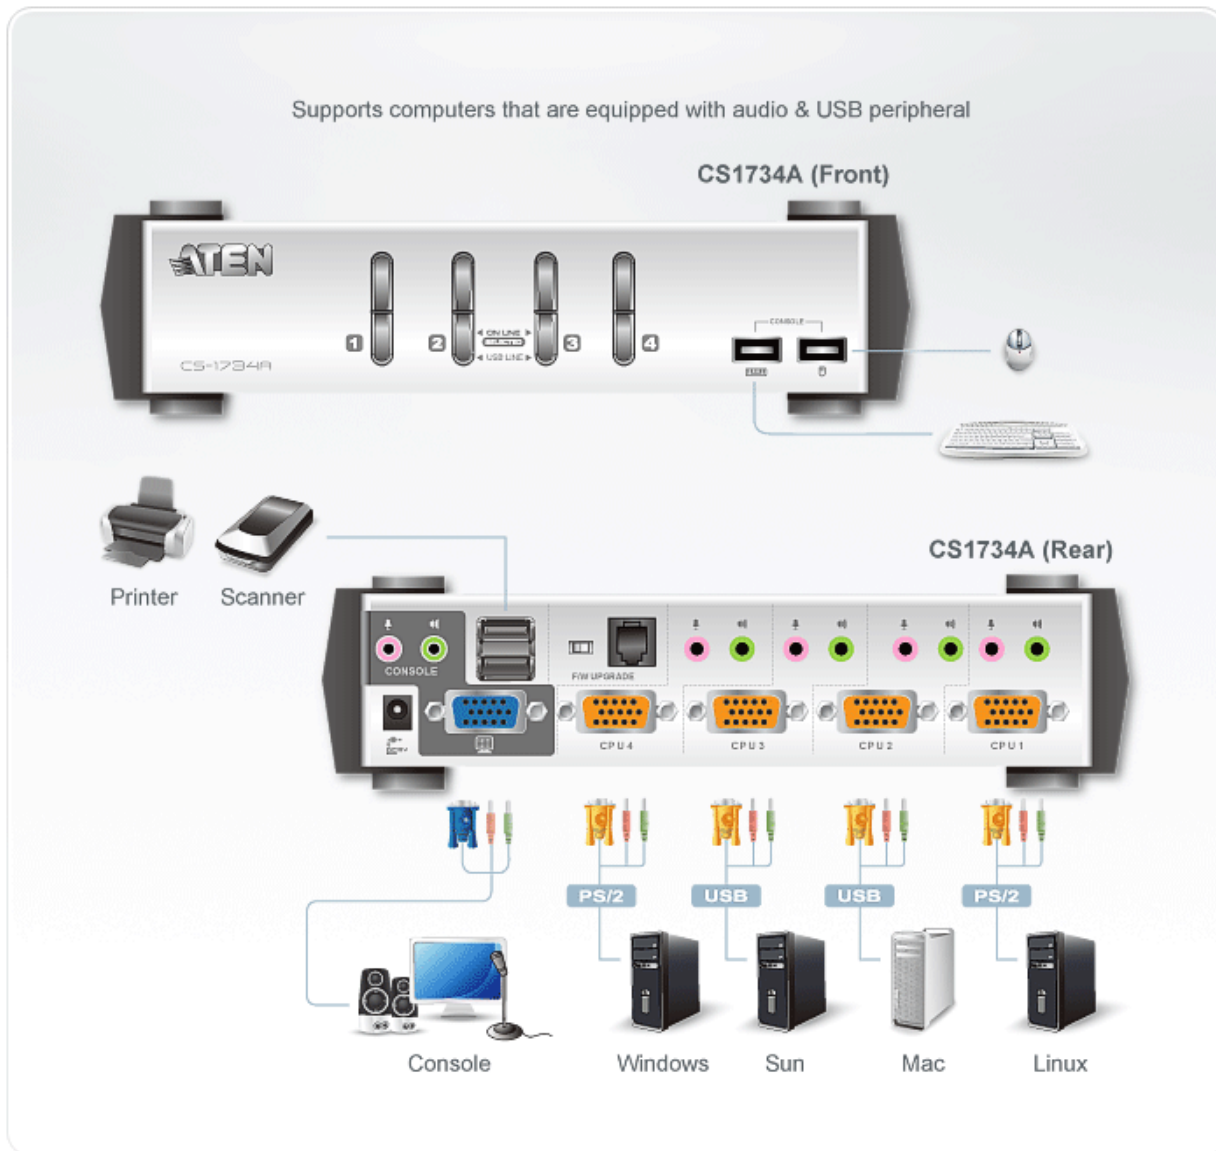

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2012 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.