


DS-KAD606-P Video/Audio Distributor

Key Features

- 8 RJ-45 interfaces, including 6 adaptive 10/100 Mbps LAN interfaces supporting network cable powering and 2 adaptive 10/100 Mbps cascading LAN interfaces
- Up to 8 distributors can be cascaded
- 6 adaptive 10/100 Mbps LAN interfaces supports providing 24 VDC for video intercom devices
- IEEE802.3, IEEE802.3u, IEEE802.3x
- Storing and forwarding function



Typical Application

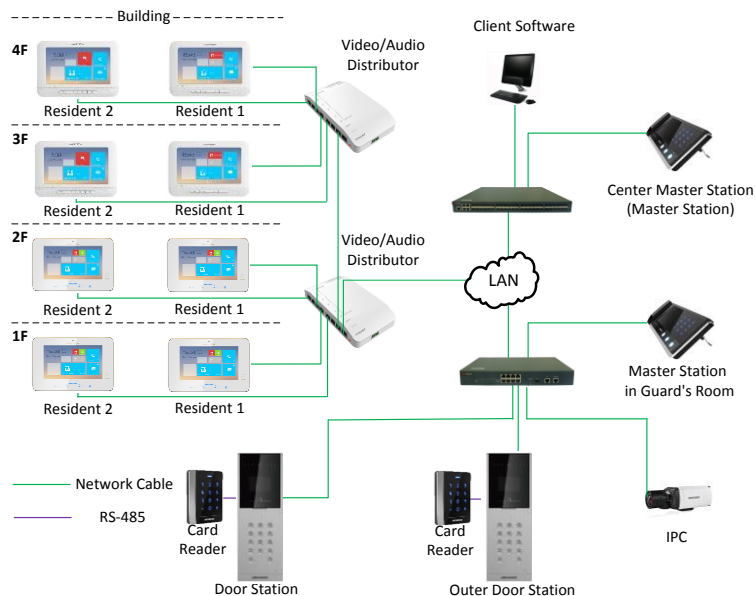


Specifications

Model	DS-KAD606-P	
Network parameters	Interface number	Eight 10/100 Mbps Interfaces
	Interface type	RJ-45, Full/Half-Duplex, MDI/MDI-X Self-Adaptive
	Standard	IEEE802.3, IEEE802.3u, IEEE802.3x
	Processing type	Storing and Forwarding
	Flow control	IEEE802.3x (Full-Duplex), Back Pressure (Half-Duplex)
	Priority queue	Four
	Max. VLAN	64
	VLAN ID No.	VID1 to VID4094
	MAC address list	8K
	Internal buffer	1 Mbit
General	Power supply	24 VDC
	Power consumption	≤8 W
	Working temperature	-10° C to 55° C (14° F to 131° F)
	Working humidity	10% to 90%, No Condensation
	Dimensions (L × W × H)	176 mm × 91 mm × 32 mm (69.3" × 35.8" × 12.6")

Available Model

DS-KAD606-P

Physical Interfaces

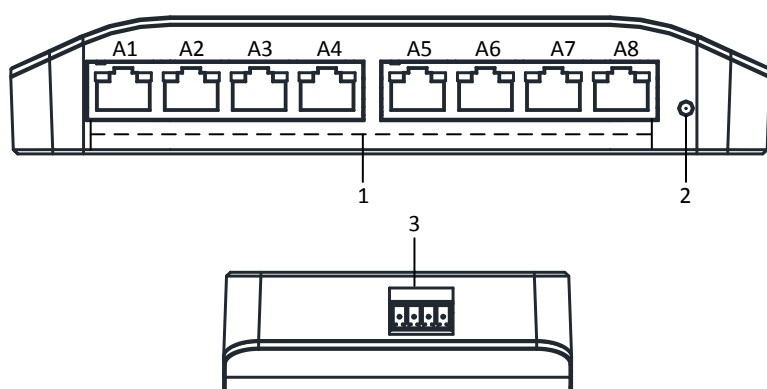

Index	Description
1	8 RJ-45 Interfaces
2	Power Indicator
3	24 VDC, Power Socket

Notes:

- Interfaces (A1, A2, A3, A4, A5, and A6) are 6 adaptive 10/100 Mbps LAN interfaces supporting network cable powering.
- Interfaces (A7 and A8) are 2 adaptive 10/100 Mbps cascading LAN interfaces.

HIKVISION

Distributed by:



www.netdigital.com.au