






1 |

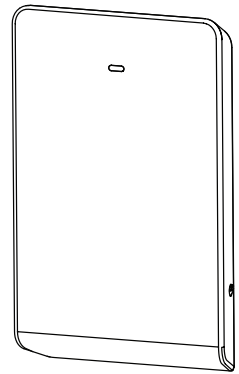


2 |

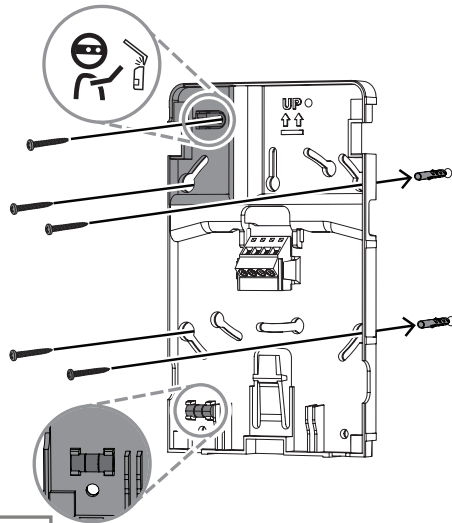


3 |

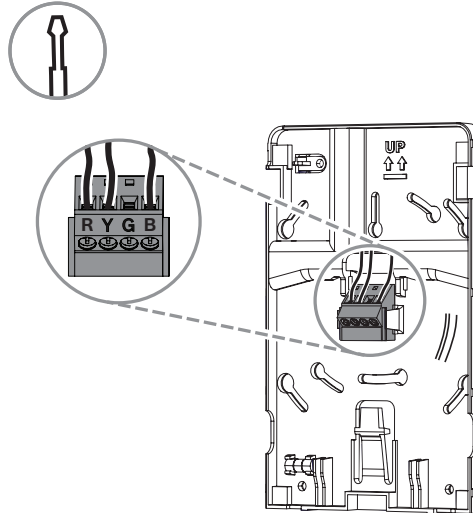



4 |

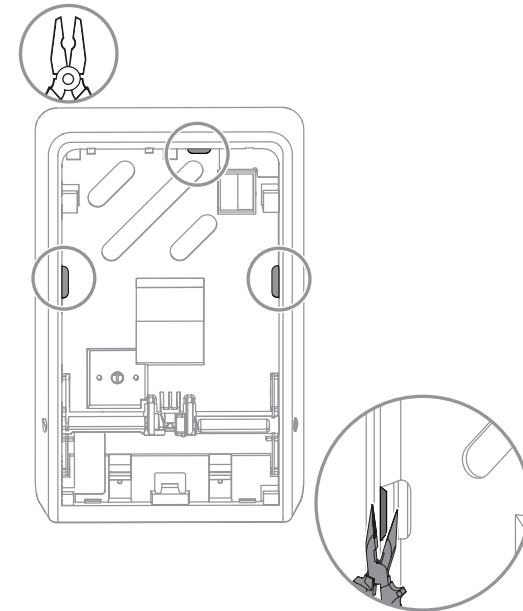


5 |

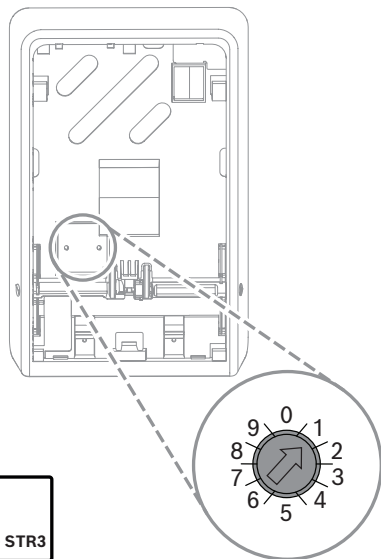



6 |


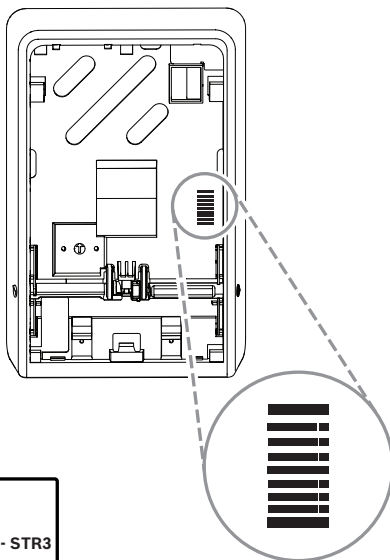


7 |

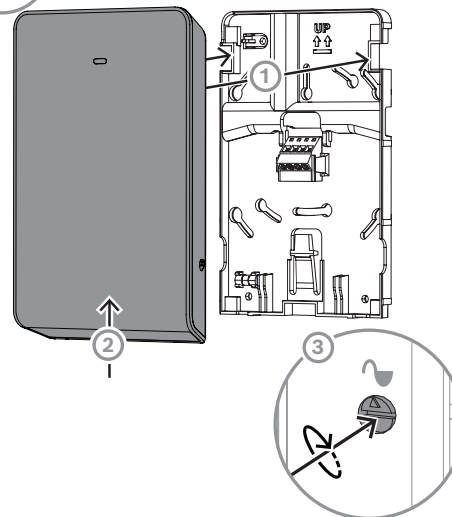

8 |

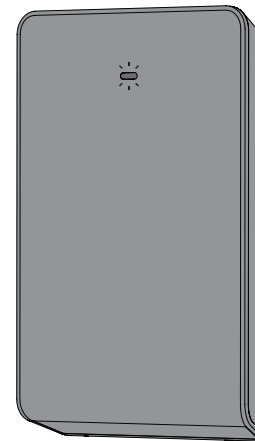

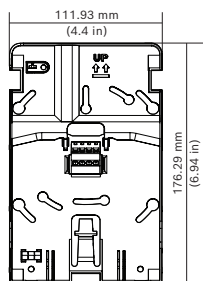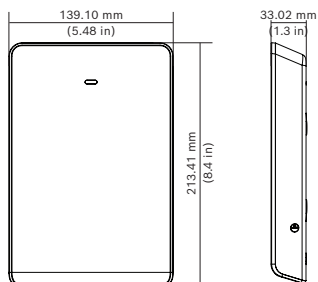

	IN DOOR USE ONLY
	10 VDC-14 VDC 20 mA
	433.42 MHz @ 10 mW maximum
	0 - 93% Non-condensing humidity
	Functional range: -20°C to +55°C (-4°F to +131°F)

Region	Agency	Certification
Europe	CE	Directive 93/68/EEC Compliance
	EMC	2014/30/EU
	LVD	2014/35/EU
	RoHS	REACH
Australia		

RFRC-STR3 Wireless streamline bus interface

RFRC-STR3



en Quick installation guide

Bosch Security Systems B.V.

Torenallee 49

5617 BA Eindhoven

Netherlands

www.boschsecurity.com

© Bosch Security Systems B.V., 2025

Building solutions for a better life