

## Switch Mode Power Supply Unit


T2426-25Z



### FEATURES

- In-line light weight compact Switch Mode Power Supply Units with a wide 90V-264V AC input voltage range to suit travel product applications.
- Standard IEC-C14 inlet allows the correct IEC-C13 power cord to be selected for different countries.
- Electrical Safety Authority Approved.
- Other voltages and choice of output plug can be custom made upon request.

### DESIGN & CONSTRUCTION

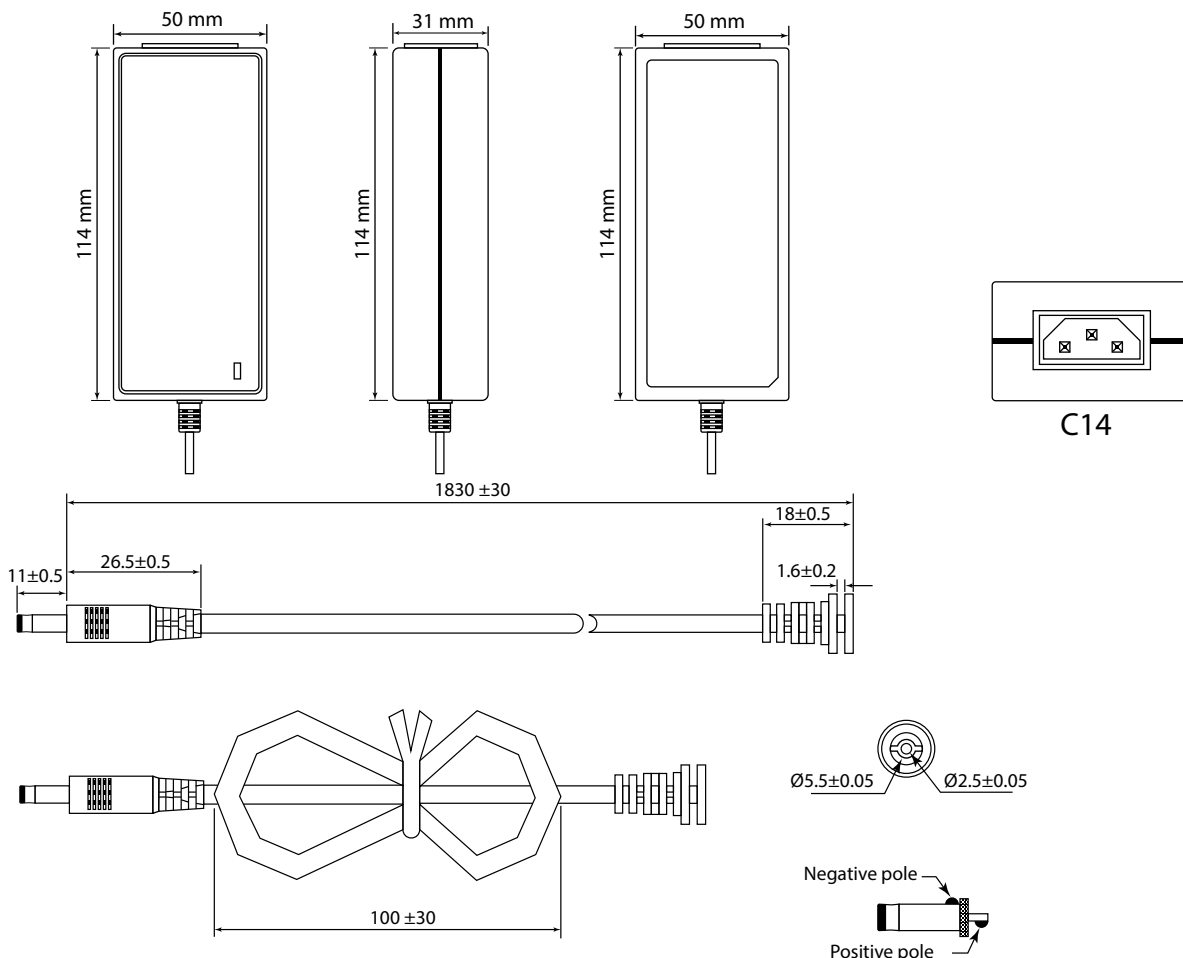

To view Access' extensive ranges go to: [www.accesscomms.com.au](http://www.accesscomms.com.au)

Sydney (Head Office)  
Brisbane Sales  
Melbourne Office  
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147  
28 The Gateway, Broadmeadows VIC 3047  
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888  
Phone: (07) 3308 5555  
Phone: (03) 9330 8333  
Phone: (08) 8338 5540

[sales@accesscomms.com.au](mailto:sales@accesscomms.com.au)  
[brisbane@accesscomms.com.au](mailto:brisbane@accesscomms.com.au)  
[melbourne@accesscomms.com.au](mailto:melbourne@accesscomms.com.au)  
[adelaide@accesscomms.com.au](mailto:adelaide@accesscomms.com.au)

## Switch Mode Power Supply Unit

T2426-25Z

### INPUT

	Minimum	Rated	Maximum
Input Voltage	90V AC	96 - 264V AC	264V AC
Input Frequency	47 Hz	47 / 63 Hz	63 Hz
Input Current			2,500mA


### MECHANICAL

Dimensions	114(L) x 31(W) x 50(H) mm
Weight	200g
Input Plug Type	In line type, IEC 60320 IEC-C14
Output Cord	UL2464, 20AWG * 2C, Black 1.83 metres
Output Plug	DC Barrel Plug (with fork and groove) - 11 x 5.5 x 2.5mm

### ENVIRONMENTAL

Cooling	Natural convection
Operating Temperature	0°C to +40°C
Storage Temperature	-40°C to +85°C
Operating Humidity	10 ~ 90 % Non-condensing
Storage Humidity	10 ~ 90 % Non-condensing

### OUTPUT

Output Voltage	24.0Vdc
Maximum Load Current	2.5A
Rated Output Power	60W
Polarity	C-POS 

### REGULATORY COMPLIANCE

Energy Efficiency	AS/NZS 4665.1 / 4665.2 (MEPS)
Efficiency Level	VI
EMC	AS/NZS CISPR22
Certification Marks	