


DS-D6049FL/V Series 49-inch Floor Standing Digital Signage



Features and Functions


- Various materials support in pictures, audio files, video files, PDF files, HTML, dynamic webpages, rolling subtitles, live broadcasting, third-party data, etc.
- Flexible programs schedule and display
- Convenient remote and local materials updating
- Centralized and integrated control of terminals, e.g., scheduled startup/shutdown, brightness/volume adjustment, picture capture, etc.
- Multi-level organization management for materials, programs, terminals and user accounts, etc.
- Multi-level user management with different permissions authorized
- Stable and reliable hardware design
- Hardening security: material/program/schedule review, device activation with strong password, screen saver password, etc.

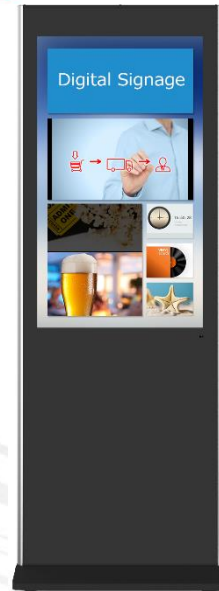


Specifications

Model	DS-D6049FL/V	
LCD Screen	Screen size	48.5"
	Backlight	TFT-LCD Backlight
	Max. resolution	1920 × 1080
	Brightness	450 cd/m ²
	Contrast	1100 : 1
	Response time	12 ms
	Pixel pitch	0.55926 × 0.55926 mm
	Color	8 bit
	Viewing angle	Horizontal 178°, vertical 178°
	Active area	1073.78 (H) × 604.0 (V) mm
	Display mode	Vertical display
Interfaces	HDMI interface	1
	VGA interface	1
	Audio input	1
	Audio output	1
	Speaker	2, 8Ω, 3W
	USB interface	2
	RS-232 interface	1
	Network	1, RJ-45 10/100 Mbps self-adaptive Ethernet interface
	SD card slot	1
	SIM card slot (for 3G/4G models only)	1
General	Color of casing	Black and Silver hemming
	Power supply	100 to 240 VAC, 50/60Hz
	Power consumption	≤ 100 W
	Standby power consumption	≤ 1 W
	Working temperature	5 to 40 °C (41 to 104 °F)
	Working humidity	10 to 90 % (non-condensing)
	Weight	≤ 80 kg
	Mounting mode	Floor Standing

Dimensions (unit: mm)

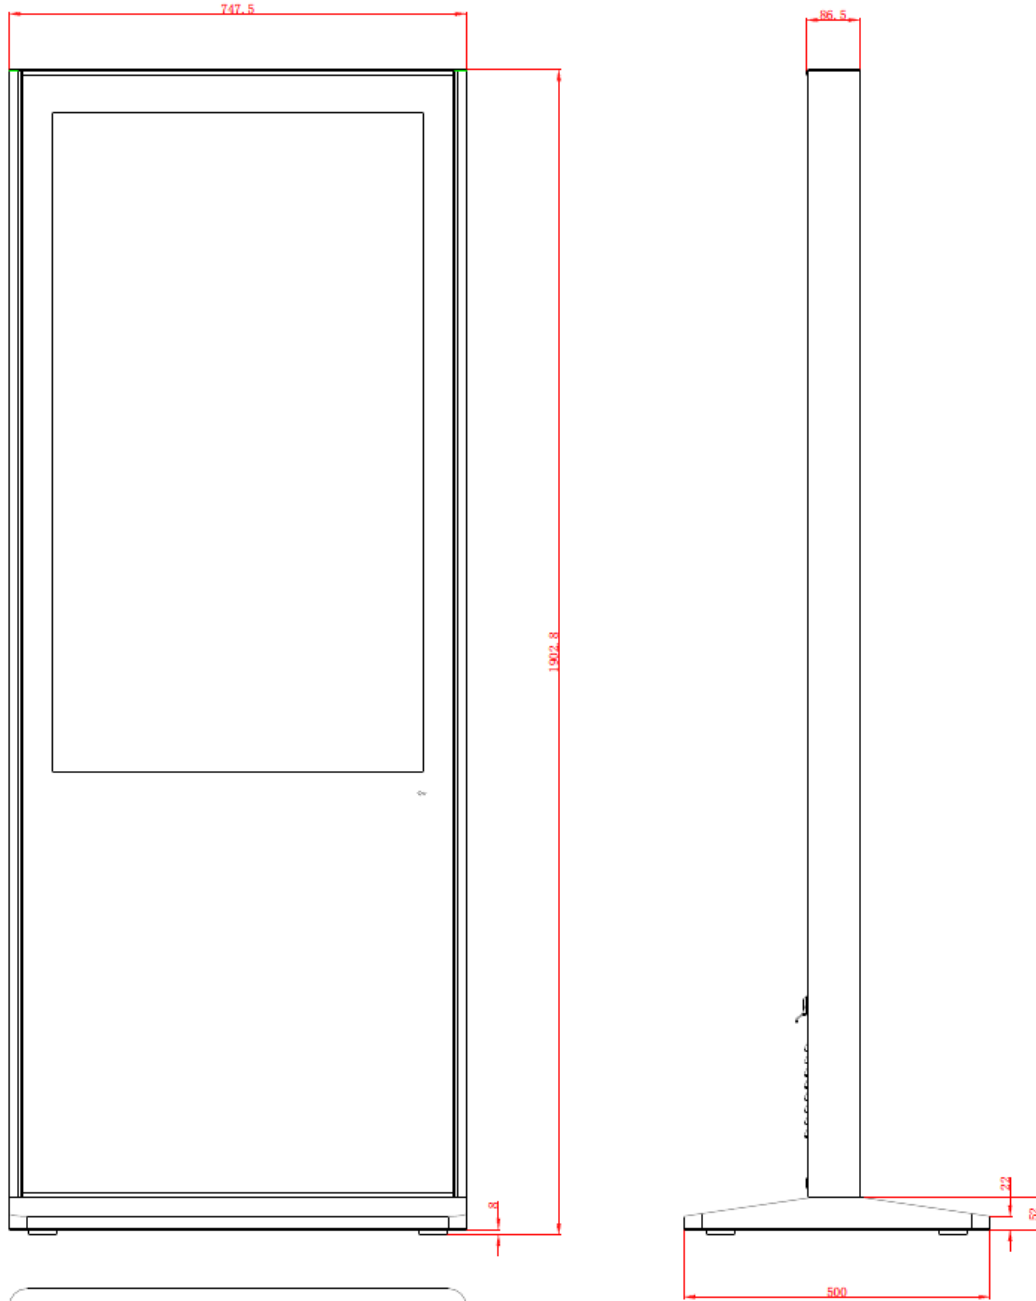

Physical Interfaces




Interface	Description
SWITCH	Turn on/off the unit
100~ 240V	100 to 240 VAC power supply
VGA IN	VGA analog input
HDMI IN	2-ch HDMI input
AUDIO IN/OUT	Audio input/output
LAN	10/100/1000 Mbps self-adaptive Ethernet interface
RS-232 IN	Serial port input
USB 3.0	USB 3.0 interface
USB 2.0	USB 2.0 interface

Available Models

DS-D6049FL/V

Distributed by

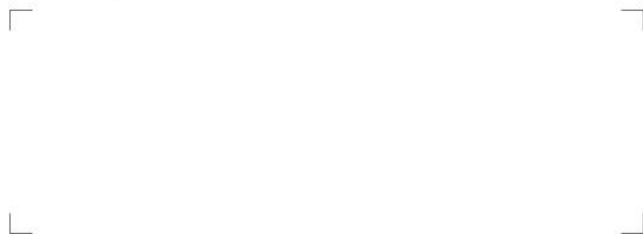

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +44-1628-9021-4
support.uk@hikvision.com

Hikvision Europe
T +31-23-5542770
saleseuro@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision France
T +33(0)1-85-330-444
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Hong Kong
T +852-2151-1761