

## PRODUCT INFORMATION

### ANSI FOOTPRINT ELECTRIC DOOR STRIKE


**FES10M**

- ◆ 5 year warranty
- ◆ Stainless steel faceplate and keeper
- ◆ Easy installation
- ◆ Low power consumption
- ◆ Compatible with latch depth of up to 15mm
- ◆ Weather resistant (FES10 only) IP56
- ◆ CE/C-Tick
- ◆ Superior holding strength

<b>EXTENSION LIPS</b>	15mm Lip FES10 – EL15 25mm Lip FES10 – EL25 50mm Lip FES10 – EL50 75mm Lip FES10 – EL75
-----------------------	--




#### PRODUCT DESCRIPTION


The patented FES10/10M ANSI footprint electric strikes are site interchangeable to operate either as Power To Lock (P.T.L.) or Power To Release (P.T.R.) through reversing the positioning of the "Barbell" inside the strike's housing, simply unscrew the springscrew cap, remove the "Barbell", reverse it and re-fix the springscrew cap. The FES10/10M can be linked to any fire alarm or access control system. It is suitable for all types of wooden, steel, PVC, aluminium or stainless door frames. The FES10/10M also have the added advantage of being dual voltage devices, 12VDC or 24VDC, simply selected by installing the appropriate connector plug supplied with the strikes. The FES10/10M are supplied pre-drilled for extension lips, and come with a 5 year warranty. Independently tested, the FES10/10M Series electric strikes are the strongest of their category.

**FES10** - Identical to the FES10M but without monitoring features


PART No.	FES10M	FES10
FUNCTION	Mortise mount, power to lock/power to release site interchangeable. Input voltage: 12/24VDC	
HOLDING FORCE	Over 1300kg	
VOLTAGE/CURRENT	Dual Voltage 12VDC/200mA 24VDC/100mA	
APPROVALS	2 hour fire rated to A.S. and B.B. standards	
MONITORING	Door Latch monitoring	Non monitored
SIZE	L= 125 x W= 42 x D= 35mm	
WEIGHT	0.42kg	
UNITS PER BOX	25 per box (11kg)	

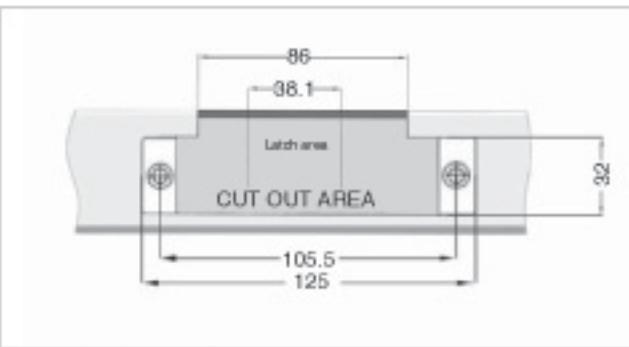

Cut out dimensions



Mounting installation on wooden door frame



Mounting installation on metal, aluminum or PVC door frames

## PRODUCT INFORMATION

### RIM MOUNT ELECTRIC DOOR STRIKE


**FES15M**


- ◆ 12VDC & 24VDC dual voltage continuously rated coil
- ◆ Simple power to lock/power to release interchange
- ◆ Weather resistant (FES15 only) IP56
- ◆ 5 year warranty
- ◆ Monitoring of door latch 24V/100mA contacts (FES15M)
- ◆ Superior holding strength
- ◆ Surface mount for "RIM" locks
- ◆ Easy installation
- ◆ Anti tamper contact (patented)
- ◆ CE/C-Tick

#### PRODUCT DESCRIPTION


The patented FES15/15M electric door strikes are designed to provide simple low cost, high quality electric locking solutions for "RIM" or surface mount mechanical door locks. The device can be interchanged power to lock (P.T.L.) or power to release (P.T.R.) at site and can be supplied with door lock tongue monitoring (FES15M). Changeover from power to lock (P.T.L.) to power to release (P.T.R.) is carried out in an identical manner to that of the FES10 strike, "Barbell" reversal. The changeover is achieved without removal of the strike body through a patented screw cap feature. Independently tested, the FES15/15M Series electric strike are the strongest of their category.

**FES15** - identical to the FES15M but without monitoring features

PART No.	FES15M	FES15
FUNCTION	Surface mount electric strike for rim latch control	
HOLDING FORCE	Over 1252kg	
VOLTAGE/CURRENT	Dual voltage 12VDC/200mA 24VDC/100mA	
APPROVALS	2 hour fire rating	
MONITORING	Door latch monitoring Anti Tamper - Monitoring	Non monitored
SIZE	L= 93.5 x W= 40 x D= 32mm	
WEIGHT	0.45kg	
UNITS PER BOX	25 per box (10kg)	

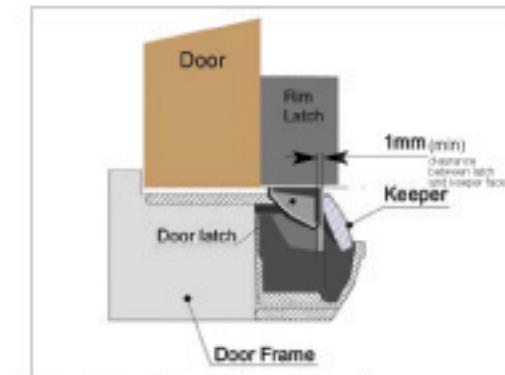

Mechanical door lock configuration

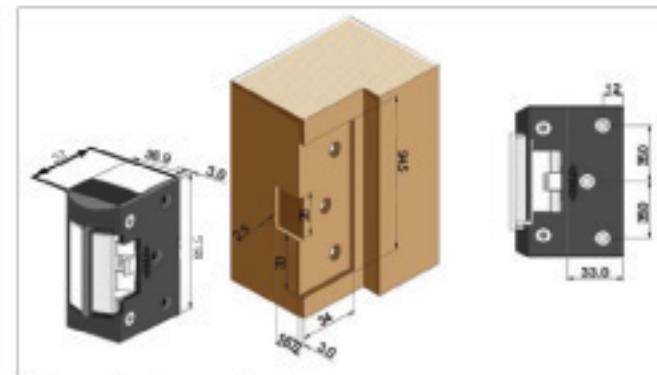

Timber door frame cut out