


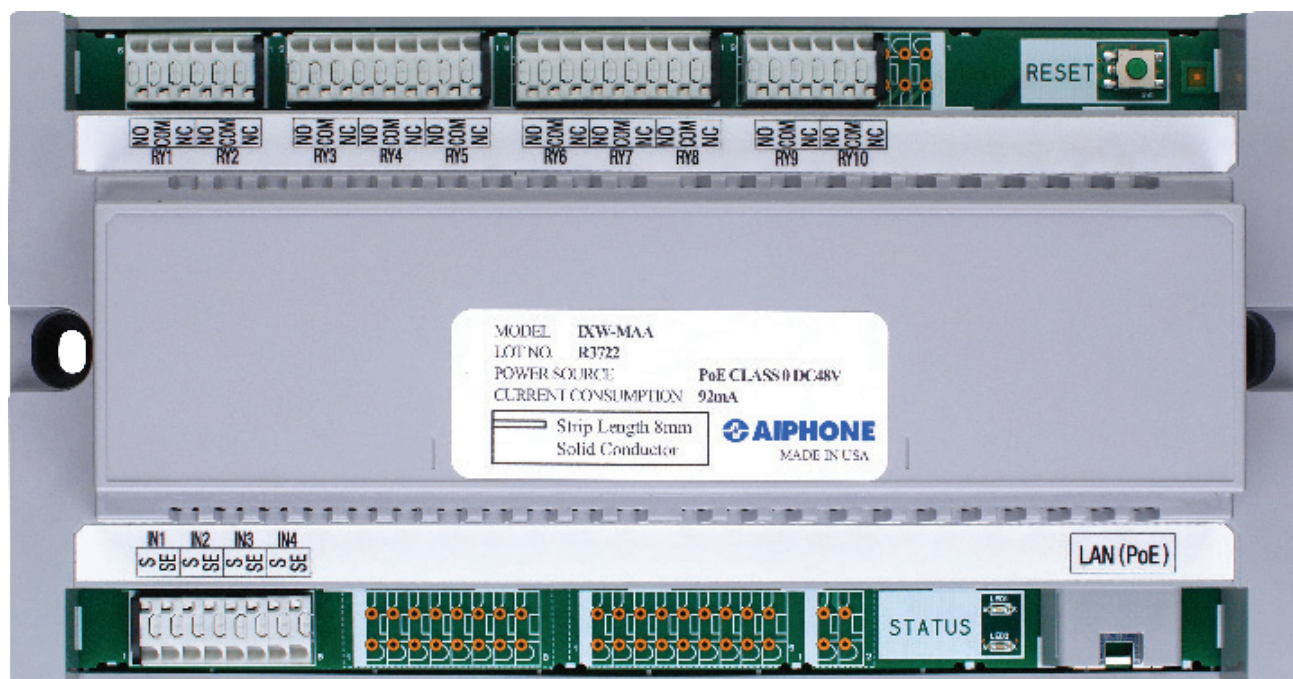

DESCRIPTION

The IXW-MAA is a multi-purpose adaptor for the IX Series with four contact inputs and ten relay outputs. The inputs can be used to send a command to a specific station to perform a task. The relay outputs are assigned to a specific station and programmed to change state when relay output 1 or 2 on the associated station changes state.

The IXW-MAA is surface mounted directly to the wall through the mounting points on either side, or it can be mounted on a standard, 35mm x 170mm DIN rail. The DIN rail is included with the station. Wire terminations connect directly to the inputs and outputs on the station.

The IXW-MAA is programmed as an IXW-MA in IX Support Tool.


FEATURES

- 802.3af PoE
- Four contact inputs
- Ten Form C relay outputs
- 24V AC/DC 500mA relay contact rating
- Mounts to the included 35mm x 170mm DIN rail or directly to a wall

IXW-MAA

Multi-Purpose Adaptor for the IX Series

FEATURE CALL-OUT

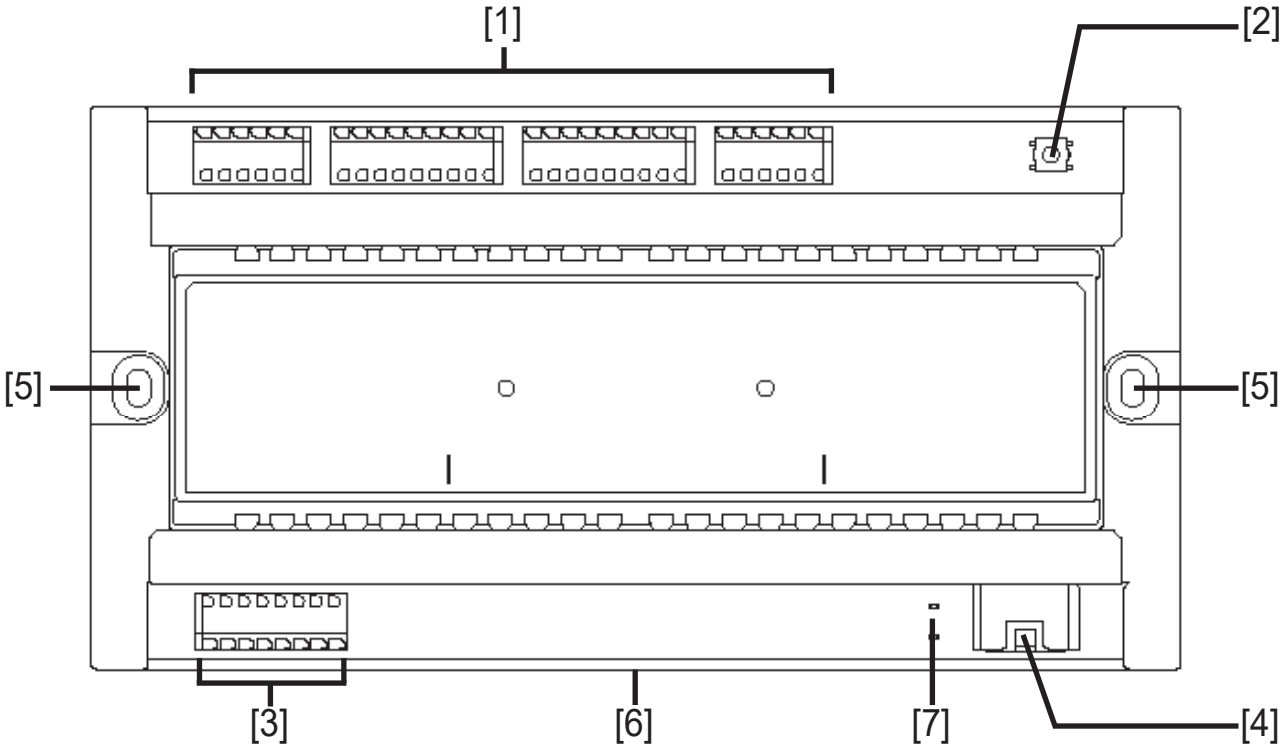

FEATURE CALL-OUT DEFINITIONS

- [1] Contact outputs 1-10
- [2] Reset button
- [3] Contact inputs 1-4
- [4] LAN port
- [5] Mounting point
- [6] DIN rail mount (on back of adaptor)
- [7] Status indicators

SPECIFICATIONS

Power Source:	PoE (IEEE 802.3af class 0)
Power Draw:	4.48 Watts (Max)
Relay Output Method:	10 Form C Dry Relays
Relay Output Rating:	24V AC/DC 500mA
LAN:	Ethernet (10BASE-T, 100BASE-TX)
Protocols:	IPv4, IPv6, TCP, UDP, HTTP, HTTPS, SMTP, SFTP, DHCP, NTP, DNS
Port Security:	IEEE 802.1X
Operating Temp:	14° ~ 122°F (-10° ~ 50°C)
Dimensions:	108.5mm H x 210mm W x 61mm D
Din Rail Mount (included)	35mm W x 170mm L