



995MF Series

Locks & latches



Legge's 995MF Series narrow stile mortice locks and latches have been designed on the underlying successful design principles of the 990MF Series. Manufactured specifically to meet the requirements of the Australasian market, the 995MF Series provides the specifier and end user with a range of vestibule lock, combination lock and latch functions, for both metal and timber doors. The 995MF Series is ideally suited for commercial and industrial applications where durability and security are of major importance.

The 995MF Series has a high purity die cast zinc alloy case to provide rigidity and precision. Major internal components are made of either stainless steel or sintered steel/copper alloy to provide durability and strength.

The final product has been rigorously tested in accelerated wear tests and testimony to the quality of the 995MF Series is shown through the extensive use in the Australian and New Zealand markets.

Features

- Designed to suit hollow stile metal door sections with internal depths from 39mm and narrow stile timber and french doors
- The multi-function case allows easy conversion of a vestibule lock function (inside handle free) to a combination lock function (both handles locked) by a simple external operation
- The reversible stainless steel latch adjusts for inwards/outwards opening and left/right hand without case disassembly
- The latch is deadlatched by a stainless steel subbolt that retracts automatically with the main latch
- The 995MF case will accept bolt-through fixing for 159mm vertical fixing door furniture such as the Legge 5300/5400 Series narrow stile furniture
- Follower will accept 7.6mm-8mm furniture spindles, with no adjustment necessary
- A threaded pin is used for secure cylinder retention
- Designed to be compatible with most electric strikes
- The 10 year warranty provides specifiers and users with assured quality and performance




Specification guide

	Function	Sub-function	Finish	Backset
	VestibuleL95V CombinationL95C	refer following pages	Chrome plate	23mm standard 30mm 30 38mm 38
1	. Function Select the desired function e.g. Ve	stibule lock		L95V
2	2. Sub-function Select the required sub-function e	e.g. V31 office/classroom locking latch .		L95V31
-	3. Finish Select the desired finish e.g. Satin	chrome plate		L95V31SCP
4	Backset Nominate non-standard backset i	f required e.g. 30mm		L95V31SCP30




Legge 995 V Series Vestibule Lock





- Inside handle always operative for emergency escape
- Automatic deadlocking by closing door
- Reversible bolt and function

Specifications

Door type	Timber or metal	
Door thickness	Timber doors - 32mm to 48mm standard. Extended cylinders, spindles and strike plates available. Metal doors - 35mm to 48mm standard. Designed to be used on hollow stile door sections, with a minimum internal depth of 39mm.	
Lock case	e High purity zinc alloy	
Outer forend	Satin stainless steel or brass	
Bolt	Stainless steel	
Sub-bolt	Stainless steel	
Spindles	2 split spindles 32mm	
Strike plate	plate Satin stainless steel or brass	
Backsets	23mm standard. 30mm and 38mm available	
Key cylinder	C4 6 pin keyway standard, Schlage C6 pin keyway optional, Schlage E6 pin keyway optional, Schlage Everest D keyway optional	
Finishes	Chrome plate, polished brass, satin chrome plate	
Warranty	10 year mechanical	

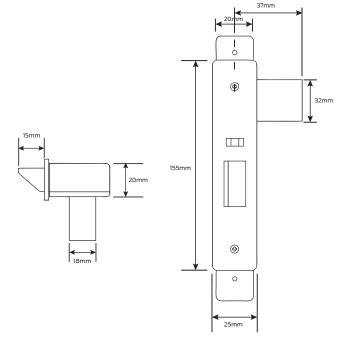

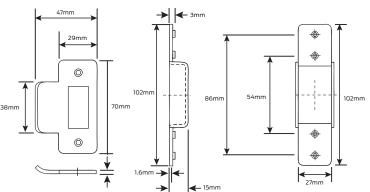





Legge 995 V Series Vestibule Lock

Sub-function Cams and adaptors

V1 (RH) V2 (LH) - Vestibule lock

Outside: Key operates bolt at all times. Handle operative except when locked by inside turn Inside: Turn locks and unlocks outside handle. Handle always operative



V7 (RH) V8 (LH) - Exterior & exit lock

Outside: Key operates bolt at all times. Handle operative except when locked by inside key Inside: Key locks and unlocks outside handle. Handle always operative



V9 (RH) V10 (LH) - Storeroom lock

Outside: Key operates bolt at all times. Handle always inoperative Inside: Handle always operative



V11 (RH) V12 (LH) - Single action lock

Outside: Key operates bolt at all times Inside: Handle always operative



V21 (RH) V22 (LH) - Vestibule lock

Outside: Operative except when locked by outside key or inside turn Inside: Turn locks and unlocks outside handle. Inside handle always operative





Legge 995 V Series Vestibule Lock

Sub-function Cams and adaptors

V31 (RH) V32 (LH) - Office/classroom lock

Outside: Key locks and unlocks handle. Handle operative except when locked by outside key Inside: Handle always operative $\,$



V41 (RH) V42 (LH) - Exterior & exit

Outside: Handle operative except when locked by inside turn Inside: Turn locks and unlocks outside handle. Inside handle always operative



V49 (RH) V50 (LH) - Exterior & exit lock

Outside: Handle operative except when locked by inside key Inside: Key locks and unlocks outside handle. Inside handle always operative




V55 (RH) V56 (LH) - Exit latch

Outside: Handle always inoperative Inside: Handle always operative






Legge 995 C Series Combination Lock





- Key or turn locks or unlocks both handles simultaneously
- Automatic deadlocking by closing door
- Reversible bolt and function

Specifications

Door type	Timber or metal	
Door thickness	Timber doors - 32mm to 48mm standard. Extended cylinders, spindles and strike plates available Metal doors - 35mm to 48mm standard. Designed to be used on hollow stile door sections, with a minimum internal depth of 39mm	
Lock case	High purity zinc alloy	
Outer forend	Satin stainless steel or brass	
Bolt	Stainless steel	
Sub-bolt	Stainless steel	
Spindles	2 split spindles 32mm	
Strike plate	Satin stainless steel or brass	
Backsets	23mm standard. 30mm and 38mm available	
Key cylinder	C4 6 pin keyway standard, Schlage C6 pin keyway optional, Schlage E6 pin keyway optional, Schlage Everest D keyway optional	
Finishes	Chrome plate, polished brass, satin chrome plate	
Warranty	10 year mechanical	



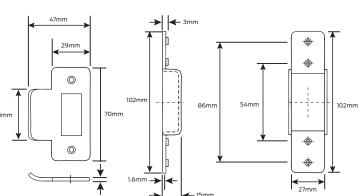





Legge 995 C Series Combination Lock

Sub-function	Cams and adaptors
C1 (RH) C2 (LH) - Entry lock Outside: Key operates bolt at all times. Both handles operative except when locked by inside turn Inside: Turn locks and unlocks both handles	1 6A
C7 (RH) C8 (LH) - Glass door lock Outside: Key operates bolt at all times. Both handles operative except when locked by inside key Inside: Key locks and unlocks both handles	1 2
C21 (RH) C22 (LH) - Entry lock Outside: Both handles operative except when locked by outside key or inside turn Inside: Turn locks and unlocks both handles	5 6A
C23 (RH) C24 (LH) - Turn entry lock Outside: Both handles operative except when locked by outside key Inside: Turn operates bolt at all times	2 1A
C27 (RH) C28 (LH) - Glass door lock Outside: Handle operative except when locked by outside or inside key Inside: Handle operative except when locked by inside or outside key	2 2



Legge 995 C Series Combination Lock

Sub-function	Cams and adaptors
C31 (RH) C32 (LH) - Glass door lock Outside: Both handles operative except when locked by outside key Inside: Handle operative except when locked by outside key	2
C33 (RH) C34 (LH) - Privacy latch Outside: Operative except when locked by inside turn. Emergency button unlocks both handles Inside: Turn locks and unlocks both handles	6A
C41 (RH) C42 (LH) - Exterior privacy latch Outside: Both handles operative except when locked by inside turn Inside: Turn locks and unlocks both handles	6A
C49 (RH) C50 (LH) - Exterior lock Outside: Both handles operative except when locked by inside key Inside: Key locks and unlocks both handles	2
C57 (RH) C58 (LH) - Passage latch Outside: Always operative Inside: Always operative	



Legge 995MF Cams and Cam Adaptors

1



5

6A (with adaptor)










Legge 995MF accessories

Long lipped strike

Strikes for non-standard wooden jambs. Available in 50mm, 60mm, 70mm, 80mm & 90mm (A) Finishes: Chrome plate, polished brass, satin chrome plate



Short lipped strike

Strikes for non-standard jambs **Finishes:** Chrome plate, polished brass, satin chrome plate.

