

IS5160H, IS5175A



The IS5160H seal is designed with a 90° angle aluminium carrier and is used to prevent draught and dust penetration on sliding doors.

The IS5175A seal is designed with a 45° angle aluminium carrier and is used to prevent draught and dust penetration around the perimeter of roller and tilt-up doors.

The angled aluminium carriers can be fitted with either 13mm, 19mm or 25mm black nylon brush.
(50mm brush is also available upon request).

Gap size

- IS5160H: Min. 23mm / max. 29mm (with 25mm brush insert)
- IS5175A: Min. 15mm / max. 21mm (with 19mm brush insert)
(Gap size dependent upon brush size utilised.)

Standard lengths

- 1000mm
- 2250mm
- Also available in: 250mm increments from 1000mm to 3000mm
(Brush lengths to be confirmed upon placement of order.)

Standard colours


- Silver anodised aluminium carrier with black nylon brush

Fixing

- Brush seals (within carriers) can be screw fixed or self-adhered to the desired surface
- Fixing screws and aggressive backing tape are supplied


Approval/s

- Durability tests demonstrating over 100,000 open and close cycles




IS5160H

(Shown with 25mm brush insert)




IS5175A

(Shown with 19mm brush insert)

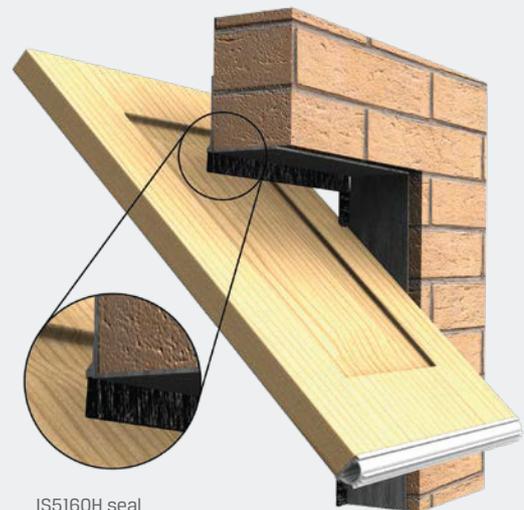

IS5160H seal

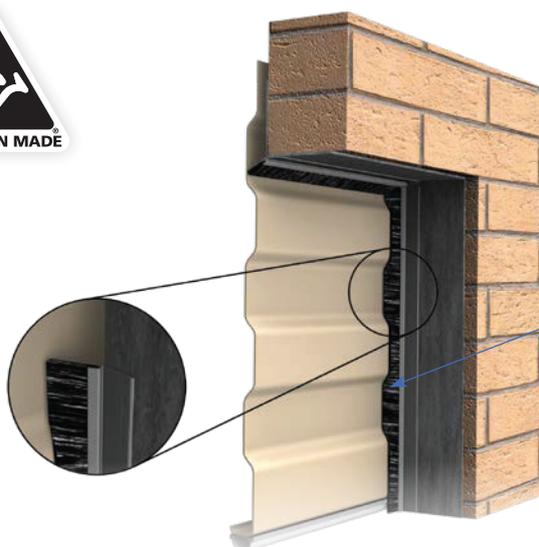

IS5175A seal