

IS8091si



A heavy duty, automatic door bottom seal which is face-fixed to the bottom edge of single action doors. The seal has a spring loaded mechanism which lifts the seal clear of the floor as soon as the door is opened. Pressure against the door jamb on the adjustable brass strike button operates the seal automatically.

The seal is fixed to the face of the door bottom using the fixing screws provided. A set of rigid push-fit reinforced nylon end plates ensure longevity of the seal mechanism. An aesthetic, architectural aluminium cover plate, provides an 'easy to clean' surface for clean-room environments.

The seal contains a high efficiency mechanism to assist with the closing force requirements detailed in AS1428/1 (Design for Access and Mobility).

Gap size

- Min. 3mm / max. 15mm

Standard lengths

- 450mm
- 610mm
- 820mm
- 920mm
- 1070mm
- 1220mm
- 1500mm

(*Longer length available to special order up to a maximum 1600mm)

IS8091si maximum allowable cut-back sizes:

- 450mm seal cuts to 275mm
- 610mm seal cuts to 450mm
- 820mm seal cuts to 610mm
- 920mm seal cuts to 610mm
- 1070mm seal cuts to 920mm
- 1220mm seal cuts to 1070mm
- 1500mm seal cuts to 1220mm

(*Seals can be cut on site for exact dimension)

Standard colours


- Silver anodised aluminium with grey end plates and grey silicone gasket. (Black end plates and black silicone gasket also available upon request.)

Approval/s

- Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1
-  Certifications GYI.R26629, GVWZ.R26629, GVWZ7.R26629
- Medium temperature smoke leakage approvals to AS1530 Part 7, compliant with AS6905 on proprietary door assemblies
- Conforms with BCA Specification C3.4 smoke sealing requirements
- Acoustically tested in accordance with AS1191, ISO140.3 and ISO10140-2
- Durability tests demonstrating over 1,000,000 open & close cycles



Kilargo IS8091si | Last edit 10/04/2018

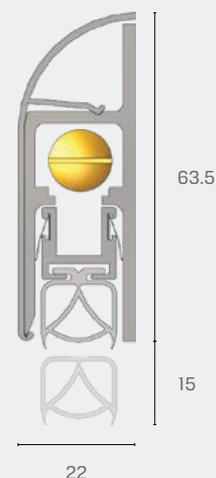

IS8091si

