# CHECK VALVE

**(High Strength And High Pressure Impact Resistance Type)**

| Ordering Code: | **CV-08W-X-Y-Z-2** |
|---|---|

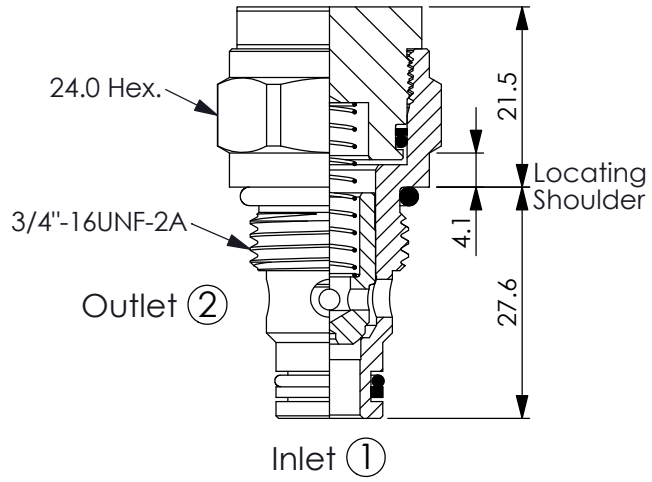


UNIT:mm

Illustrations / detail are for reference only. Data subject to change.




| TECHNICAL DATA | | |
|---|---|---|
| Rated pressure: (Max. pressure: | 350 420 | bar bar) |
| Rated flow: | 30 | l/min |
| Cavity-Tooling: | 08W-2 | |
| Installation torque: | 39 - 51 | Nm |
| Weight: | 0.096 | kg |

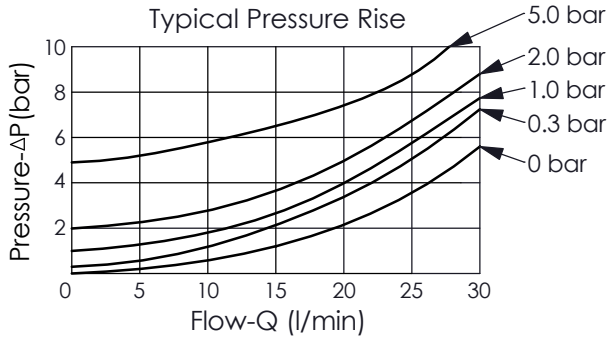


| X | OPERATION | |
|---|---|---|
| **22** | ① to ② (Free Flow) | |

| Y | SPRINGS | |
|---|---|---|
| | Cracking pressure | |
| **00** | 0 bar (without spring) | |
| **03** | 0.3 bar | |
| **10** | 1.0 bar | |
| **20** | 2.0 bar | |
| **50** | 5.0 bar | |

| Z | OPTION | |
|---|---|---|
| **N** | Non-adjustable  | |