

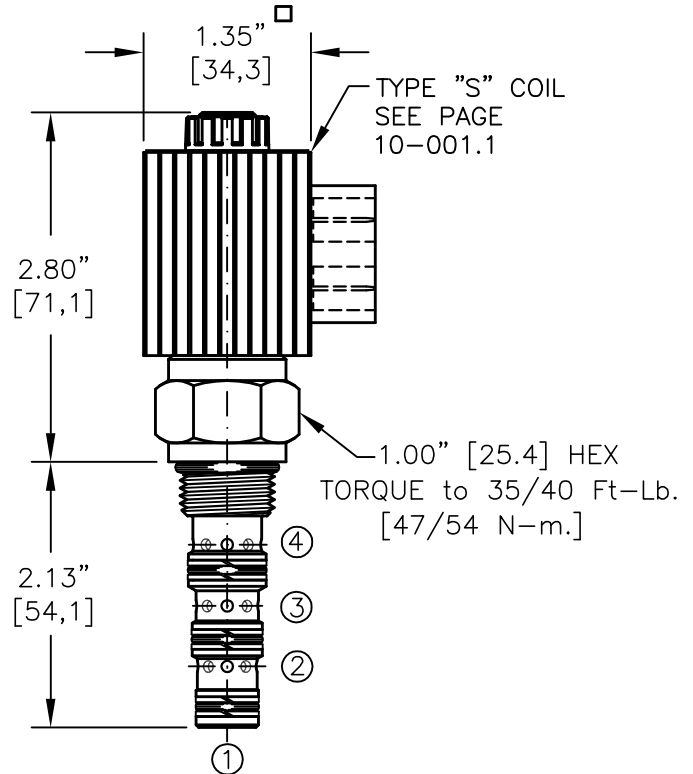


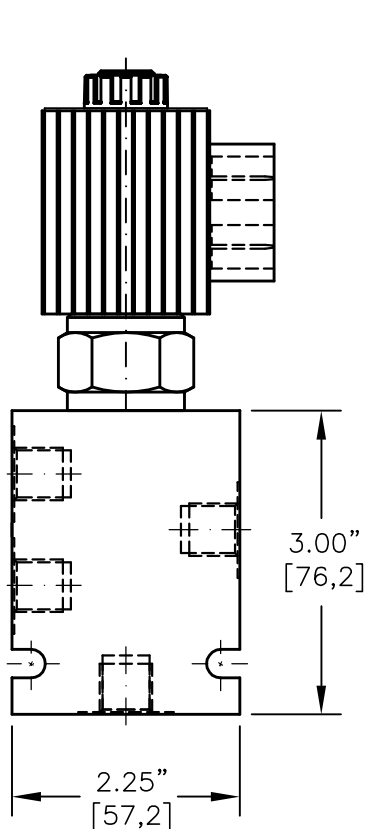


SOLENOID VALVE, 4-WAY, 2-POSITION.
DIRECT ACTING, SPOOL TYPE (4/2)



NOTES:

1. FOR ALUMINUM OR STEEL VALVE HOUSING CONFIGURATIONS SEE PAGE 0-041.1
2. SOLENOIDS AVAILABLE WITH DIODES - CONSULT FACTORY.
3. FOR "AC" COILS USE RECTIFIED DIN CONNECTOR 20828.

EMDV-08-X-4K-X-XXX X			
BASIC		TERMINALS	
SIZE		L=18GA. 24" LEADS	
08 = 3/4"-16UNF		T=SPADE TERM.	
		B=BOLT TERM.	
SEALS		G=DIN43650	
N = BUNA "N"		W=WEATHER-PACK	
V = VITON		D=DEUTSCH-DT04-2P	
		M=METRI-PACK CONN.	
TYPE		VOLTAGE	AMPS
4K= "K" SPOOL		12D = 12 VDC	1.7
4-WAY, N.C. SELECTOR		24D = 24 VDC	.9
		36D = 36 VDC	.6
PORTS		48D = 48 VDC	.5
0 = CARTRIDGE ONLY		115D = 115 VDC	.2
02BX = G 1/4" BSSP			
06TX = SAE - #6			
"A" = ALUM. HOUSING			
"S" = STEEL HOUSING			

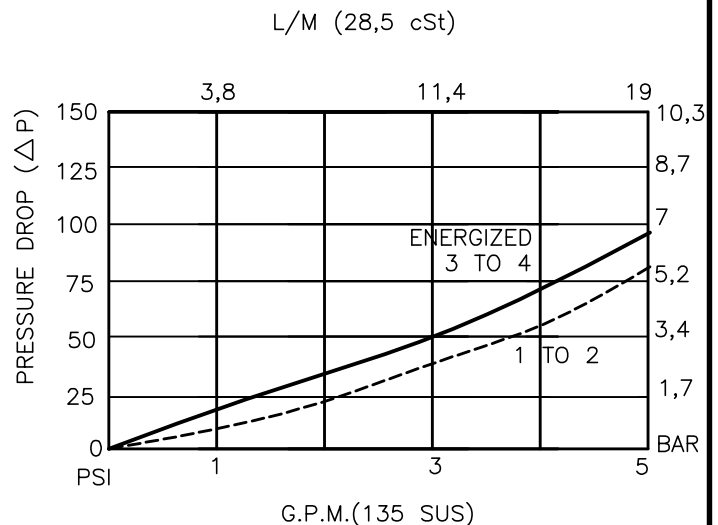



SOLENOID VALVE 4-WAY, 2-POSITION, DIRECT ACTING, SPOOL TYPE (4/2)

DESCRIPTION

This unit is a FOUR-WAY, TWO POSITION, cartridge type, spool type, direct acting, screw in type, solenoid operated, normally closed selector valve.

OPERATIONS

When solenoid coil is de-energized, this valve is closed at all ports. When solenoid coil is energized, the spool in this valve is shifted and allows flow from ports 1 to 2, and from port 3 to 4 or vice versa.

FEATURES AND BENEFITS

Continuous-duty, very low heat rise & waterproof solenoid coil. Interchangeable solenoid coils & terminations options available. Hardened precision fitted spool & sleeve provides reliable, long life. Very efficient, wet-armature solenoid core tube construction. All external carbon steel parts are plated for longer life against the elements. All cartridge valves are 100% functionally tested. Industry common cavity.

SPECIFICATIONS

OPERATING PRESSURE: 5,000 PSI [350 Bar]

PROOF PRESSURE: 10,000 PSI [700 Bar]

FLOW: 5.0 GPM [19 l/m] See performance chart.

INTERNAL LEAKAGE: 5cu.in/min [82 cc/m] @ 5,000 PSI [350 Bar]

VALVE HOUSINGS: 2500 PSI [175 Bar] = Aluminum - Anodized.

5000 PSI [350 Bar] = Steel - Unplated.

OPERATING TEMPERATURE: -40° to +250° F. [-40° to +120° C.]

OPERATING MEDIA: All general purpose hydraulic fluids such as MIL-H-5606, SAE-#10, SAE-#20, etc.

RESPONSE TIME: First indication of change in pressure with 100% voltage supplied @ 80% of nominal flow rating.

* Pull-in: 50 ms

* Drop-Out: 50 ms

SEAL KIT: SKN-0842 Buna "N"

SKV-0842 Viton

WEIGHT: .98 lb [.44 kg] cartridge with coil only.

VALVE CAVITY: #C0840, See Page 0-041.0.