


TECHNICAL DATA	
Max. Operating pressure:	350 bar (Refer To Performance Chart)
Rated flow:	25 l/min (Refer To Performance Chart)
Response Time:	Opening 30-70 ms Closing 50-70 ms
Cavity-Tooling:	13A-2
Installation torque:	39-51 Nm
Weight:	0.18 (Z=N,P) kg
Fluids-Temperatures:	-40 to 120 °C
Internal Leakage Approximately:	0.15 cc/minute (3 drops/minute) max. at 350 bar
Hydraulic Fluid Cleanliness Level:	Please refer WINNER technical information. ( T.101.102.E HYDRAULIC FLUID (B)CLEANLINES )
Minimum Voltage Required:	90 % of nominal
Coils must be ordered separately	
Mounting Position:	unrestricted

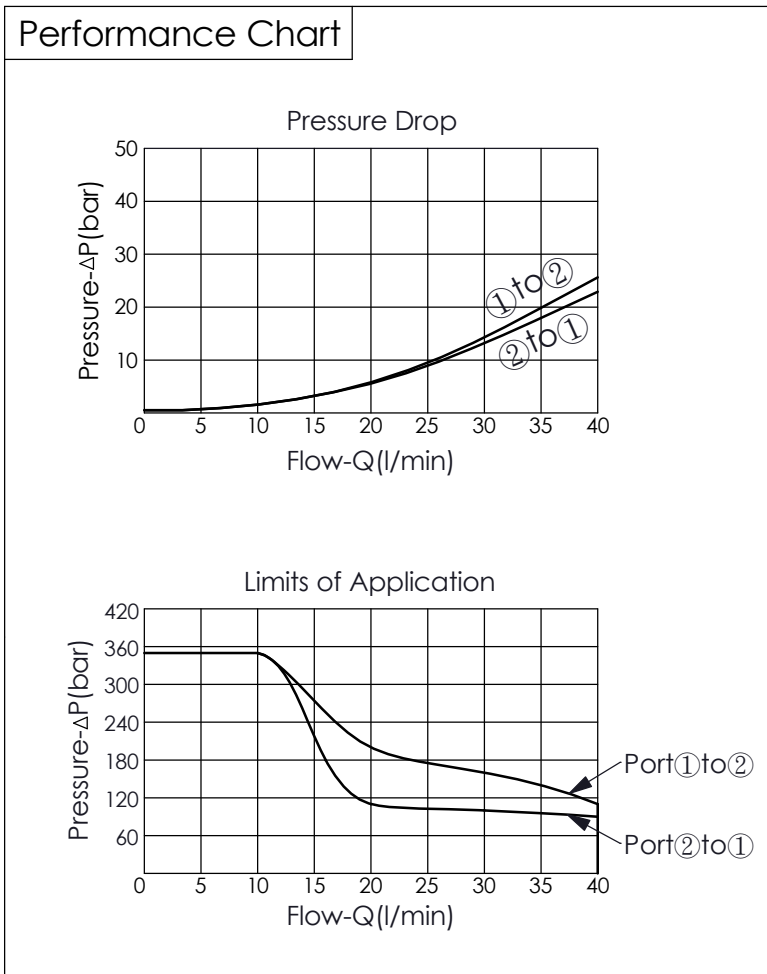

Y	OPERATION
51	Direct-Acting Normally -Closed Double-Lock, Fast-acting

X	STRUCTURE
2C	2 Ports - 26 Watt. Coil Ø 16 mm tube

Z	OPTIONS
N	Non-adjustable
P	Push Style Manual Override
T	Push and Twist Style Manual Override