


S = Sun Relief Cavity T10-A  
 C = Common Relief Cavity C10-2  
 Omit if No Relief Required

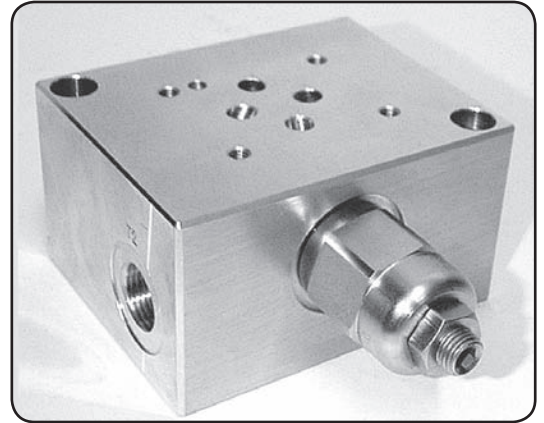

### Specifications


Material :	Alloy 6061-T6	Steel - S1214
Max. Working Pressure :	Alloy - 210 Bar	Steel - 350 Bar
Surface Treatment :	Alloy - Nil	Steel - Zinc Gold Passivation
Port Sizes :	P & T - 3/8" BSPP	A & B - 3/8" BSPP      G - 1/4" BSPP

### Included Components

Socket Head Cap Screws :	(Inc. 2 x M6 Nuts) 2 each M6 x 50
Flat Washers :	2 each M6

### Technical Details

Valve Interface Mtg Threads M5

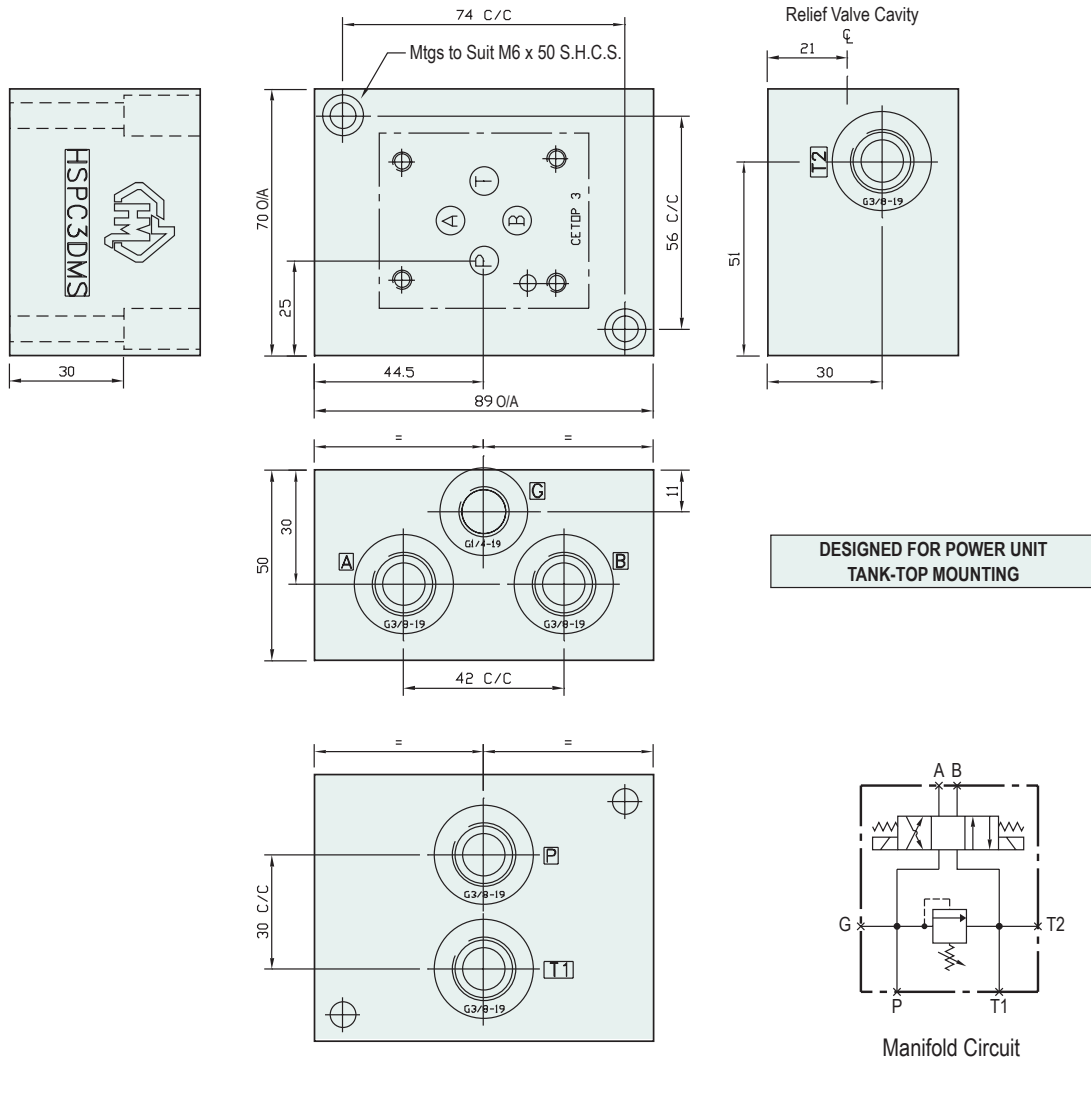

#### Subplate - Without Relief Cavity

Part Number	Nominal Mass Kg
HSPC3DH	2.1
HSPC3DM	0.8

#### RELIEF VALVES SOLD SEPARATELY

SUN RELIEF VALVE	RPEC-LAN	(Suits Alloy)
SUN RELIEF VALVE	RPEC-LCN	(Suits Steel)
COMMON RELIEF VALVE	RP100-ABN	(Suits Alloy)
COMMON RELIEF VALVE	RP100-ACN	(Suits Steel)

#### Subplate - With Relief Cavity

Part Number	Nominal Mass Kg
HSPC3DHC	1.9
HSPC3DMC	0.7
HSPC3DHS	1.9
HSPC3DMS	0.7