



REDUCING VALVE (Pilot Operated Reducing)

Ordering Code: **PB-11A-X-Y-Z**

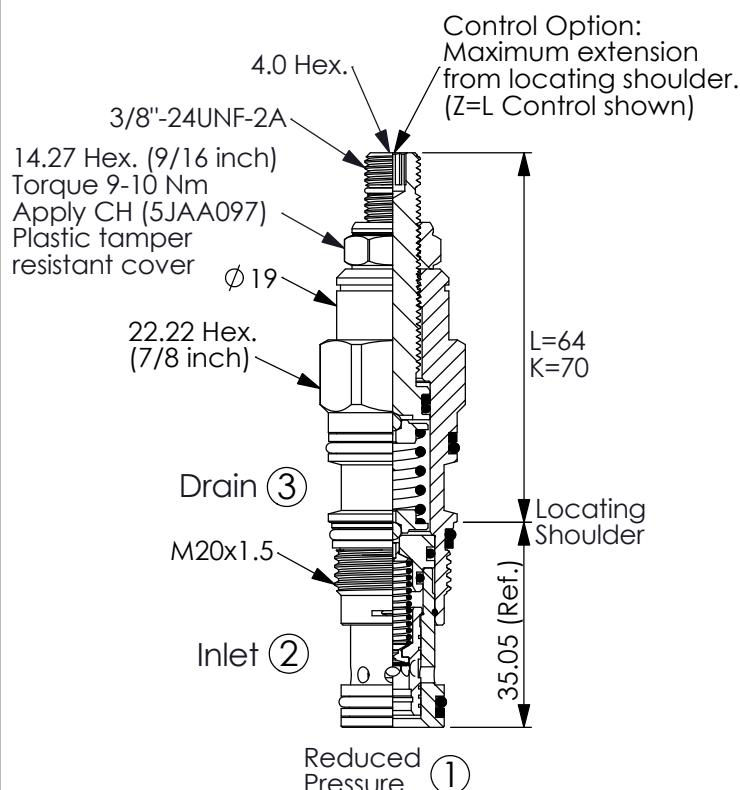

UNIT:mm

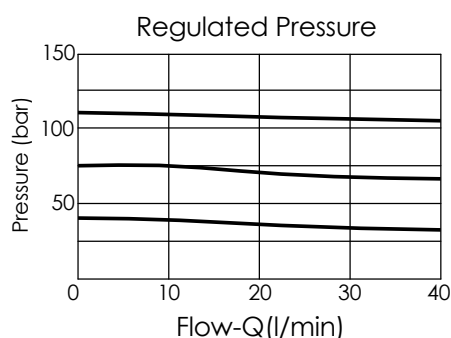


SPRINGS

ADJUSTMENT RANGES

Y	
A	7-210 bar (14 bar Standard Setting) Maximum Differential=210 bar
B	3.5-105 bar (14 bar Standard Setting) Maximum Differential=210 bar
C	10.5-420 bar (14 bar Standard Setting)
D	1.7-55 bar (14 bar Standard Setting) Maximum Differential=140 bar
E	1.7-28 bar (14 bar Standard Setting) Maximum Differential=140 bar
*G	4-210 bar (14 bar Standard Setting)
*K	5-105 bar (14 bar Standard Setting)
N	4-55 bar (14 bar Standard Setting) Maximum Differential=140 bar
*P	2.8-28 bar (14 bar Standard Setting)
Q	4-28 bar (14 bar Standard Setting) Maximum Differential=140 bar
W	10.5-315 bar (14 bar Standard Setting)

* Maximum differential pressure...Any technical questions, please feel free to consult with our sales dept.

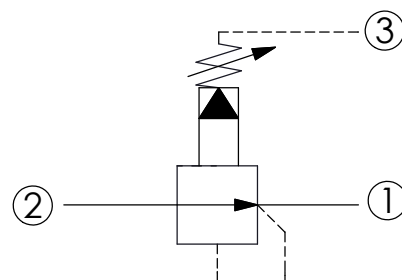

TECHNICAL DATA

Max.Operating pressure:	350	bar
Rated flow:	40	l/min
Cavity-Tooling:	11A-3	
Installation torque:	40-50	Nm
Weight:	0.16 (Z=L,LF,LP)	kg
	0.18 (Z=KF)	kg
	0.14 (Z=G)	kg
Control Pilot Flow (0.11-0.16 L/min.)		

X OPERATION

30	Standard Type
35	Impact Resistant Type (Without Filter)

Z OPTIONS

L	Leakproof hex. socket screw.	
LF	Leakproof hex. socket screw. with Panel Mount.	
LP	Leakproof hex. socket screw. With stainless steel external metal components	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	
KF	Handknob with Panel Mount.	
G	Wrench Adjustment	