


SV-30



SYMBOLS



ORDER CODES

SV **08** - **30** - **D1** - **D** - **N**

1 2 3 4 5

1 ▶ Valve Size	08	
2 ▶ Model	30	
3 ▶ Voltage (coil)	A1	115 VAC
	A2	230 VAC
	D1	12 VDC
	D2	24 VDC
4 ▶ Connector (coil)	D	DIN connector type
	L	wiring type
5 ▶ Material of Seal	N	buna-N
	V	viton

MODEL SPEC.


Model	Cavity	Capacity (l/min)	Max. Pressure (bar)	Installation Torque (Nm)	Operating Temperature	Weight (kg)
SV08-30	SAE-08-3	15	255	27.1	-35 ~ 100°C (-31 ~ 212°F)	0.26

PERFORMANCE CURVES

Typical Pressure Drop

- de-energized,
Port 2 → Port 1
- energized,
Port 3 → Port 2

* 32cSt / 150 ssu oil at 40°C

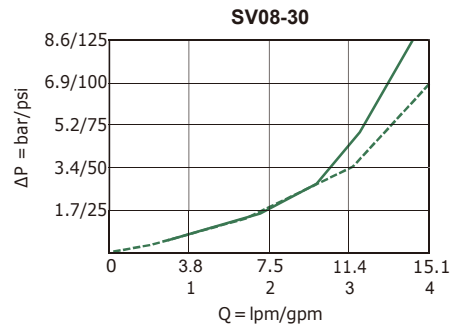

DIMENSION

(UNIT : mm)

