

PBNZ RESIN RIBBON

INTRODUCTION

Our resin ribbon is uniquely engineered for flat head applications requiring high levels of abrasion, heat and solvent resistance. It is UL recognized and provides dense, dark printed images while providing extensive label compatibility on a wide range of synthetic and polyester label and tag materials. An anti-static back coating formulation dissipates static electricity and works to protect and extend the life of your printhead.


FEATURES

- 1. Superior heat, abrasion and solvent resistance
- 2. High density printing
- 3. Low static ink formulation
- 4. Outstanding value in the resin category
- 5. UL recognized



Recommended substrates:

Synthetic paper, PVC Cards, PET Card, Film, glossy & semi glossy paper (PET, PP, PVC)

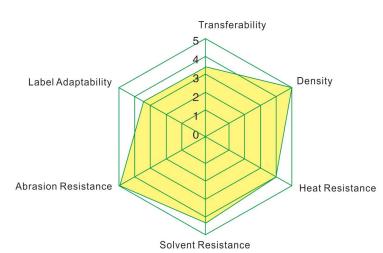

RIBBON PROPERTIES	
TOTAL THICKNESS	$6.9\pm0.2\mu$ m
INK THICKNESS	$1.2\pm0.2\mu$ m
ELECTROSTATIC	≤0.15 Kv
OPTICAL DENSITY	≥1.75 D
GLOSSINESS	≥50 Gs
INKMELTPOINT	80℃











T: 09 273 4455 | W: www.peacocks.co.nz | E: sales@peacocks.co.nz



Innovation, expertise & efficiency since 1888