

PBNZ RESIN RIBBON

INTRODUCTION







Our resin ribbon is uniquely engineered for flat head applications requiring high levels of abrasion, heat and solvent resistance. It is UL recognized and provides dense, dark printed images while providing extensive label compatibility on a wide range of synthetic and polyester label and tag materials. An anti-static back coating formulation dissipates static electricity and works to protect and extend the life of your printhead.

FEATURES

1. Superior heat, abrasion and solvent resistance
2. High density printing
3. Low static ink formulation
4. Outstanding value in the resin category
5. UL recognized

PRINT MATERIAL

Recommended substrates:

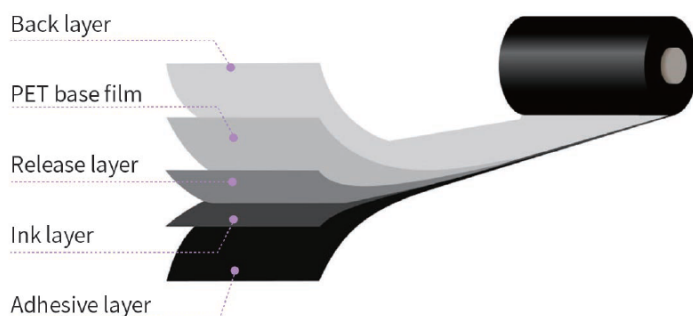

RIBBON PROPERTIES	
TOTAL THICKNESS	6.9 ± 0.5 µm
BASE FILM THICKNESS	4.5 ± 0.2 µm
BASE FILM	BOPET
STORAGE CONDITIONS	-5°C ~ 40°C 20%~85% Relative Humidity
INK MELT POINT	100°C



Peacock Bros. NZ

T: 09 273 4455 | W: www.peacocks.co.nz | E: sales@peacocks.co.nz

AUCKLAND | MELBOURNE | SYDNEY | BRISBANE | PERTH | ADELAIDE



**Innovation,
expertise &
efficiency
since 1888**

peacocks.co.nz