

PBNZ WAX / RESIN RIBBON

INTRODUCTION

This wax/resin thermal ribbon is UL recognized and delivers superior image durability on a wide variety of label and tag media. Along with increased abrasion and heat resistance, this ribbon also provides excellent print darkness and high-definition characters and images. Printing up to 10 IPS and utilising less printhead energy than competitive wax/resin formulations. Our wax/resin ribbon redefines the price-performance equation in the industry. An anti-static back coating formulation dissipates static electricity and works to protect and extend the life of your printhead.

FEATURES


1. Plug & print compatibility
2. Superior heat & abrasion resistance
3. Wide label compatibility
4. Low printhead energy requirements
5. Excellent image density
6. UL recognized



PRINT MATERIAL

Recommended substrates:

Art paper, coated and uncoated tags and labels, gloss and semi-gloss paper, synthetic paper, film (PET, PP, PVC)

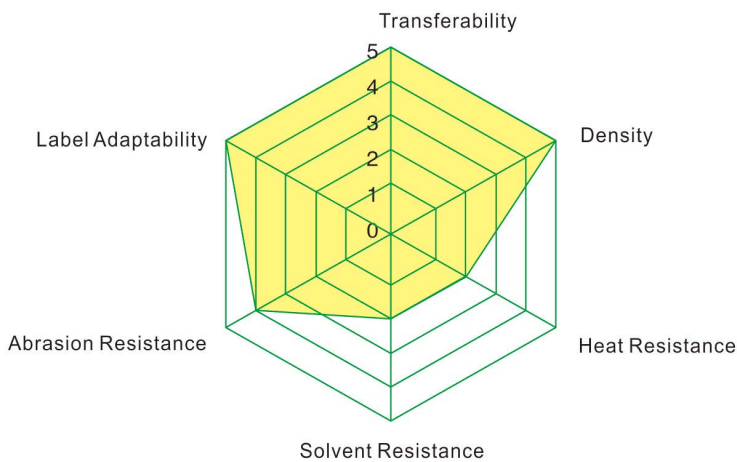

RIBBON PROPERTIES	
TOTAL THICKNESS	7.1 ± 0.3 μm
INK THICKNESS	2.5 ± 0.4 μm
ELECTROSTATIC	≤ 0.06 Kv
OPTICAL DENSITY	≥ 2.15 D
COLOR DENSITY	≥ 2.6 DB
GLOSSINESS	≥ 60 Gs
INKMELTPOINT	78°C



Peacock Bros.

T: 09 273 4455 | W: www.peacocks.co.nz | E: sales@peacocks.co.nz

MELBOURNE | SYDNEY | BRISBANE | PERTH | ADELAIDE | AUCKLAND



**Innovation,
expertise &
efficiency
since 1888**

peacocks.co.nz