

The back-to-back check valve combines two simple check valves into a single cartridge. It connects the work port with the higher pressure to the signal or common port. The signal is sensed at port 3.

**TECHNICAL DATA**

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-11A
Series	1
Capacity	2.5 gpm
Maximum Operating Pressure	5000 psi
Maximum Valve Leakage at 110 SUS (24 cSt)	5 drops/min.
Valve Hex Size	7/8 in.
Valve Installation Torque	30 - 35 lbf ft
Seal kit - Cartridge	Buna: 990011007
Seal kit - Cartridge	Polyurethane: 990011002
Seal kit - Cartridge	Viton: 990011006
Model Weight	0.25 lb.

**CONFIGURATION OPTIONS**



Model Code Example: CDABXBN

CONTROL	(X) CRACKING PRESSURE	(B) SEAL MATERIAL	(N) MATERIAL/COATING
<b>X</b> Not Adjustable	<b>B</b> 15 psi (1. bar)	<b>N</b> Buna-N	Standard Material/Coating
A Auxiliary External -4 SAE Port		V Viton	/AP Stainless Steel, Passivated
B Auxiliary External 1/4 BSPP Port			/LH Mild Steel, Zinc-Nickel

**TECHNICAL FEATURES**

- Back-to-back check cartridges feature hardened, spherically lapped, guided poppets and a lightly stressed helical spring that result in excellent wear characteristics and extremely low leakage rates.
- The back-to-back checks do not provide a means of lowering a signal. They will trap a high signal if the load pressures drop to a lower pressure. Some means of bleeding off the signal should be provided.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

## PERFORMANCE CURVES

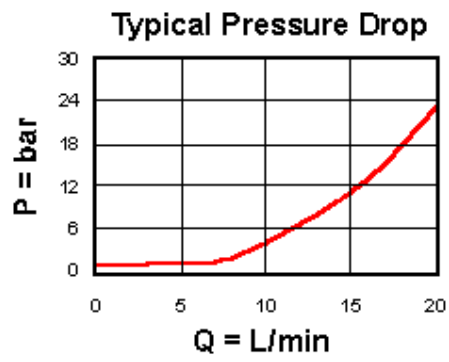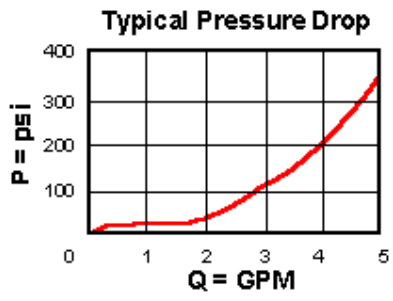

## RELATED MODELS

- [CDAB8](#) Model