

H S P C 5 B U *


Hydraulic Subplate
 Cetop5
 Bottom Ported UNF
 M = Alloy
 H = Steel

Specifications


Material :	Alloy 6061-T6	Steel - S1214
Max. Working Pressure :	Alloy - 210 Bar	Steel - 350 Bar
Surface Treatment :	Alloy - Nil	Steel - Zinc Gold Passivation
Port Sizes :	P & T - 3/4" UNF	A & B - 3/4" UNF

Included Components

Socket Head Cap Screws :	(Inc. 2 x M8 Nuts) 2 each M8 x 35
Flat Washers :	2 each M8

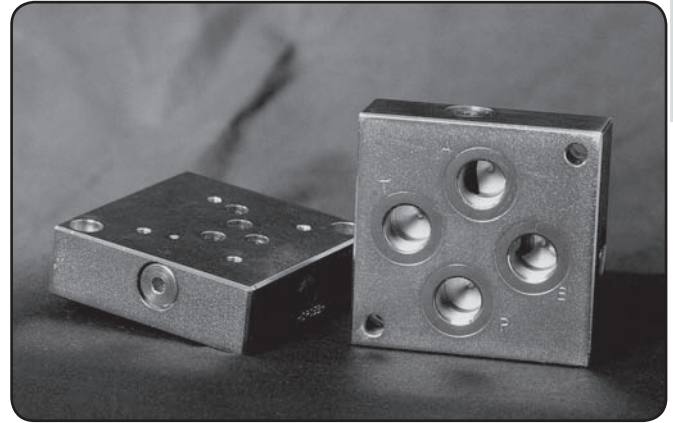

Technical Details

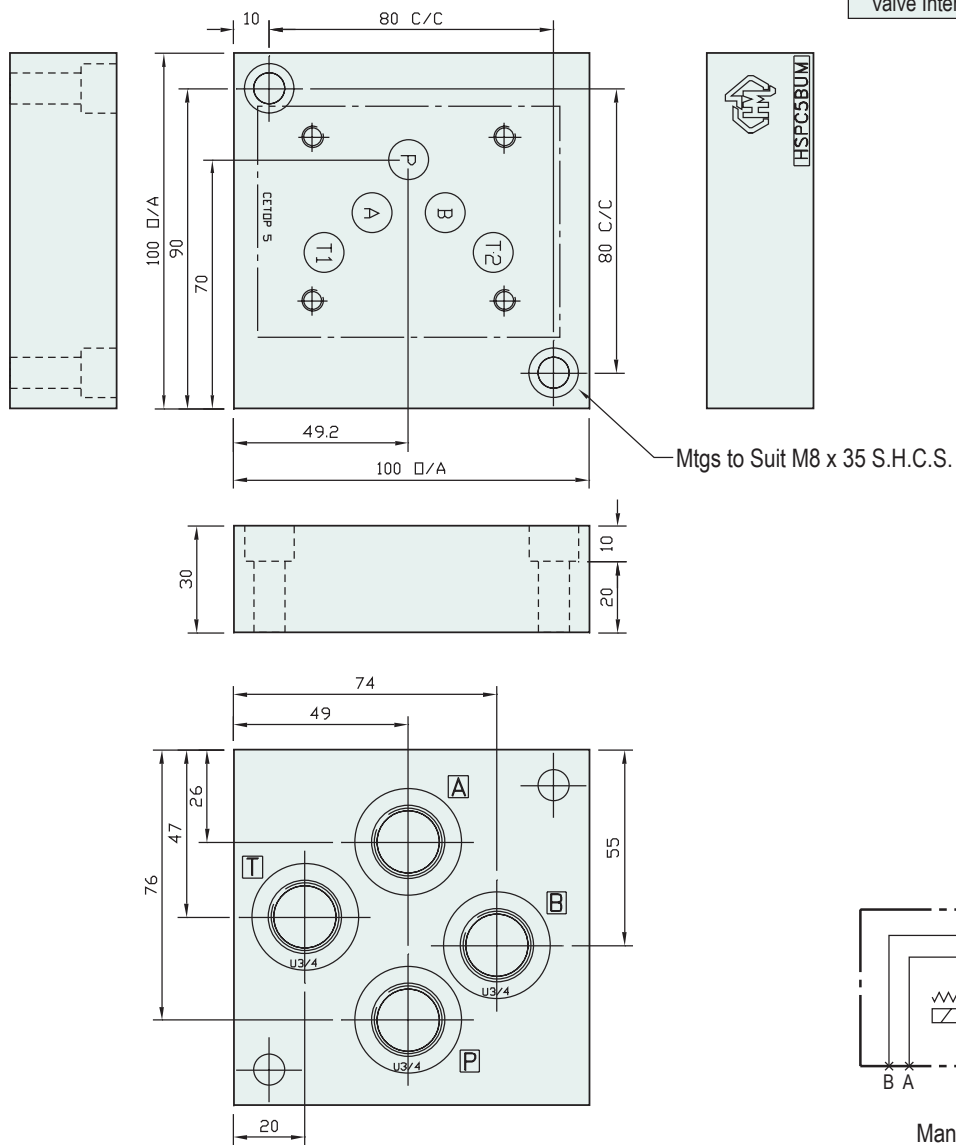

UN Subplate Made To Order

Part Number	Nominal Mass Kg
HSPC5BUH	2.1
HSPC5BUM	0.7