


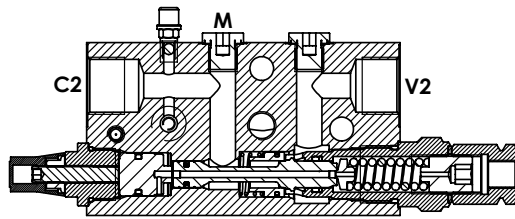


CHECK AND METERING VALVE

MLLT-150-ALLV

IN LINE VERSION
RIGHT VERSION

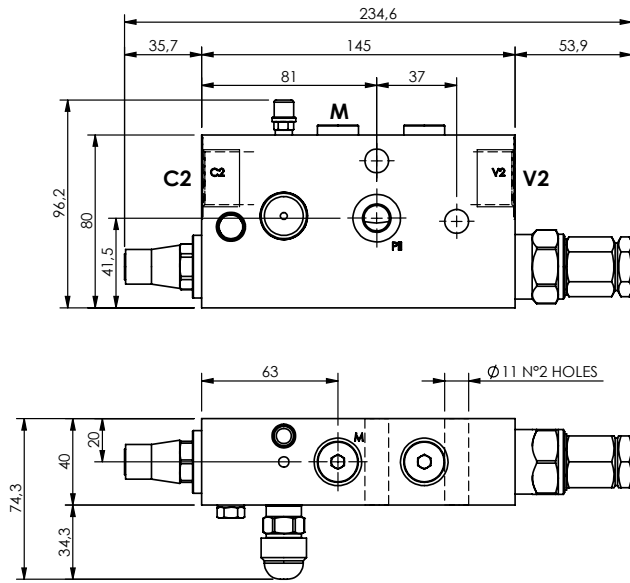


SPECIFICATIONS

Max. operating pressure:	420 bar
Rated flow:	150 l/min
Manifold:	Steel
Weight:	3,41 kg

NOTES

When correctly adjusted for the special excavator installation, these valves meet the requirement of ISO 8643

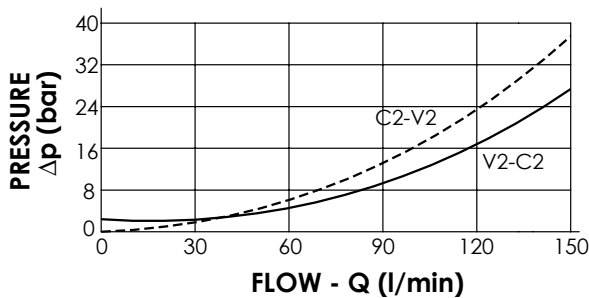

ORDERING CODES

Quick code	Description	Main ports size	Standard setting (bar)	Adjust. range (bar)	Pressure increase (bar/turn)
ML000011	MLST-150-ALLV-00-G34-N350	V2,C2: G 3/4 P11,T: G 1/4	① 350 Q=5 l/min ② 7.5 Crack. pr.	① 150-350 ② 5-30	① 165 ② 8
ML000029	MLST-150-ALLV-00-U11-N350	V2,C2: 1 1/16-12 UNF P11,T: 9/16-18 UNF	① 350 Q=5 l/min ② 7.5 Crack. pr.	① 150-350 ② 5-30	① 165 ② 8