



Ordering Code: **RD-10A-X-Y-Z**

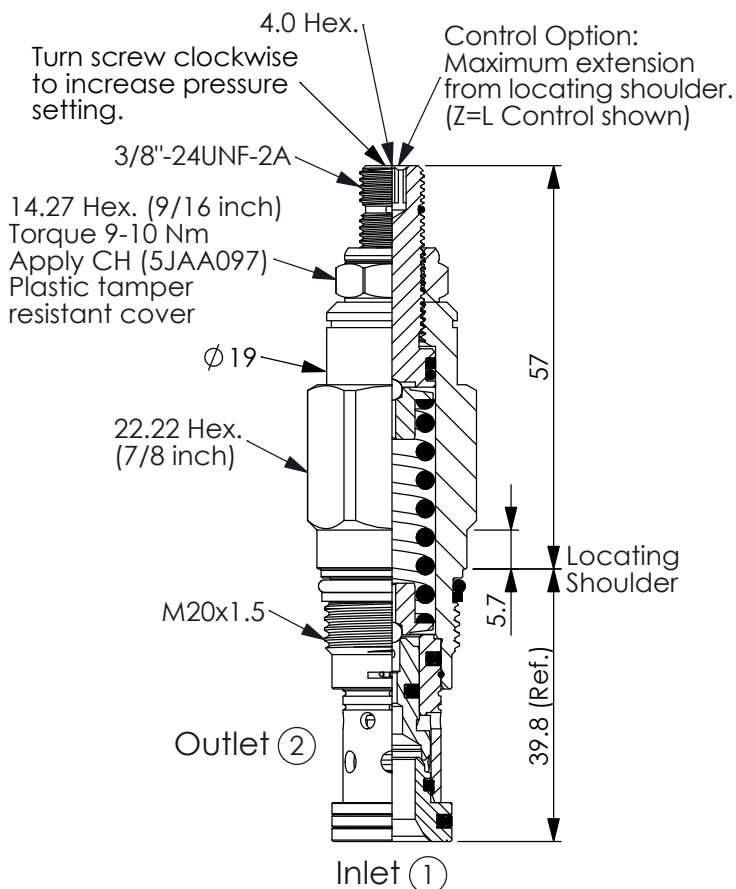


UNIT:mm

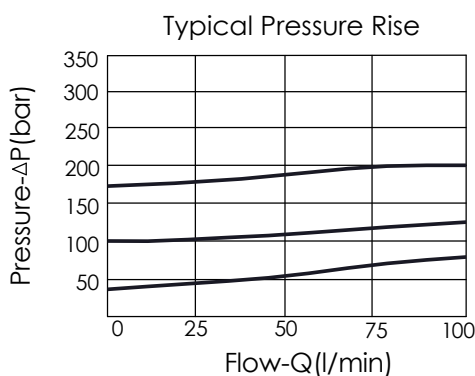

Y PRESSURE SETTING

A	35-210 bar (70 bar Standard Setting)	
B	20-105 bar (70 bar Standard Setting)	
C	70-420 bar (70 bar Standard Setting)	
D	14-55 bar (28 bar Standard Setting)	
E	10-28 bar (14 bar Standard Setting)	
S	3.5-14 bar (7 bar Standard Setting)	
W	55-315 bar (70 bar Standard Setting)	



TECHNICAL DATA

Max. Operating pressure: 350 bar

Rated flow: 95 l/min

Cavity-Tooling: 10A-2

Installation torque: 40-50 Nm

Weight: 0.17 kg

Will accept maximum pressure at port ②; suitable for use in cross port relief circuits.

X OPERATION

25 Direct Acting
① to ② (P to T)

- Response Time-Typical (2 ms)
- Maximum Leakage Approximately (5 drops/min. to 85% of nominal setting)
- Dirt tolerant

Z OPTION

L	Leakproof hex. socket screw.	
LP	Leakproof hex. socket screw. With stainless steel external metal components	
CP	Stainless Steel Tamper Resistant Cover. With stainless steel external metal components	
CB	Plastic Tamper Resistant Cover	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	