



aktiv



Level up with **aktiv™** the fluid head build for speed.


Mount, level and lock your fluid head in seconds. Capture the perfect shot – with the revolutionary aktiv™ head built for speed. The unique SpeedLevel™ and SpeedSwap™ technology deliver the fastest way to place and position the camera – giving the camera operator ultimate creativity.

- **Level and lock your head in an instant without missing a second of action**
Unique SpeedLevel™ technology
- **Visible from any height or angle - day or night**
Innovative PrismBubble
- **Capture extreme low angle shots right down to the ground**
Innovative streamlined mounting system
- **Switch between tripod and slider in seconds**
Revolutionary SpeedSwap™ system
- **Create moving stories, whatever the weather.**
Performance tested to the extreme



aktiv6

Payload Range
0 - 8 kg
0-17.6 lb

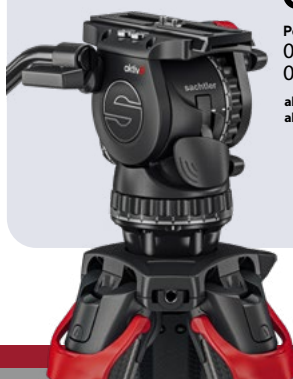

aktiv8

Payload Range
0 - 12 kg
0 - 26.5 lb

aktiv8 Sideload
aktiv8T Touch & Go



aktiv10

Payload Range
0 - 12 kg
0 - 26.5 lb

Mid-level spreader systems



**System aktiv6
flowtech75 MS**
S2064S-FTMS



**System aktiv8
flowtech75 MS**
S2068S-FTMS



**System aktiv8T
flowtech75 MS**
S2068T-FTMS



**System aktiv10
flowtech100 MS**
S2072S-FTMS

Bowl	75 mm with SpeedSwap™	75 mm with SpeedSwap™	75 mm with SpeedSwap™	100 mm with SpeedSwap™
Payload range	0 - 8 kg / 0-17.6 lb	0 - 12 kg / 0-26.5 lb	0 - 12 kg / 0-26.5 lb	0 - 12 kg / 0-26.5 lb
Counterbalance steps	15+0	15+0	15+0	15+0
Drag setting	3+0	7+0	7+0	7+0
Camera fitting	Sideload S	Sideload S	Touch & Go plate S	Sideload S
System weight	6.2 kg / 13.7 lb	6.3 kg / 13.9 lb	6.4 kg / 14.1 lb	6.9 kg / 15.2 lb
Height range without spreader	23 - 170 cm / 9.0 - 66.9 in	23 - 170 cm / 9.0 - 66.9 in	23 - 170 cm / 9.0 - 66.9 in	25 - 172 cm / 9.8 - 67.7 in
Height range with spreader	79 - 174 cm / 31.1 - 68.5 in	79 - 174 cm / 31.1 - 68.5 in	79 - 174 cm / 31.1 - 68.5 in	72 - 175 cm / 28.3 - 68.9 in

Ground spreader systems



**System aktiv6
flowtech75 GS**
S2064S-FTGS



**System aktiv8
flowtech75 GS**
S2068S-FTGS



**System aktiv8T
flowtech75 GS**
S2068T-FTGS



**System aktiv10
flowtech100GS**
S2072S-FTGS

Bowl	75 mm with SpeedSwap™	75 mm with SpeedSwap™	75 mm with SpeedSwap™	100 mm with SpeedSwap™
Payload range	0 - 8 kg / 0-17.6 lb	0 - 12 kg / 0-26.5 lb	0 - 12 kg / 0-26.5 lb	0 - 12 kg / 0-26.5 lb
Counterbalance steps	15+0	15+0	15+0	15+0
Drag setting	3+0	7+0	7+0	7+0
Camera fitting	Sideload S	Sideload S	Touch & Go plate S	Sideload S
System weight	6.4 kg / 14.1 lb	6.5 kg / 14.3 lb	6.6 kg / 14.5 lb	6.8 kg / 15 lb
Height range without spreader	23 - 170 cm / 9.0 - 66.9 in	23 - 170 cm / 9.0 - 66.9 in	23 - 170 cm / 9.0 - 66.9 in	25 - 172 cm / 9.8 - 67.7 in
Height range with spreader	56 - 176 cm / 22 - 69.3 in	56 - 176 cm / 22 - 69.3 in	56 - 176 cm / 22 - 69.3 in	58 - 178 cm / 22.8 - 70 in

System aktiv10 flowtech100 S2072S-FT

Systems without spreader

Bowl	100 mm with SpeedSwap™
Payload range	0 - 12 kg / 0-26.5 lb
Counterbalance steps	15+0
Drag setting	7+0
Camera fitting	Sideload S
System weight	6.3 kg / 13.9 lb
Height range	25 - 172 cm / 9.8 - 67.7 in

