


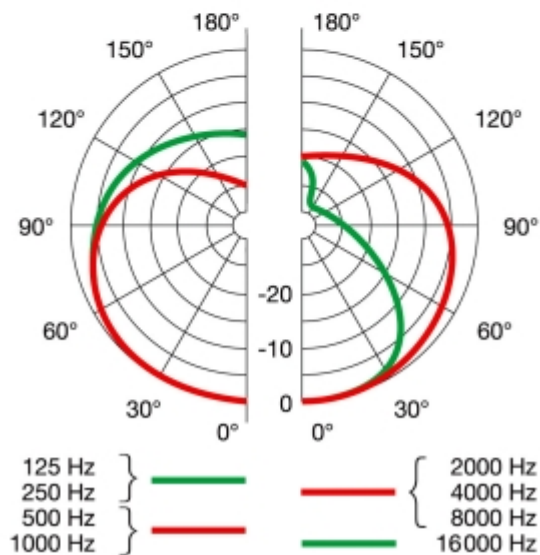
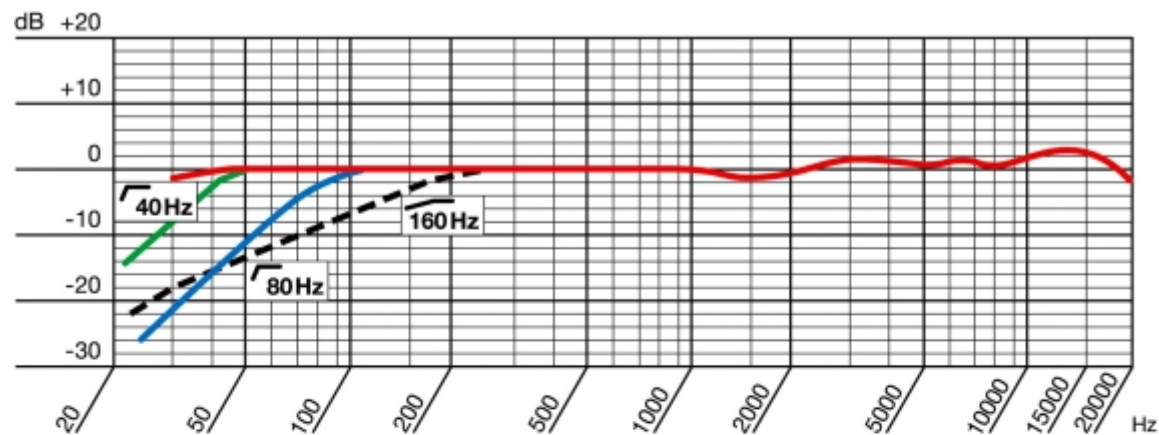
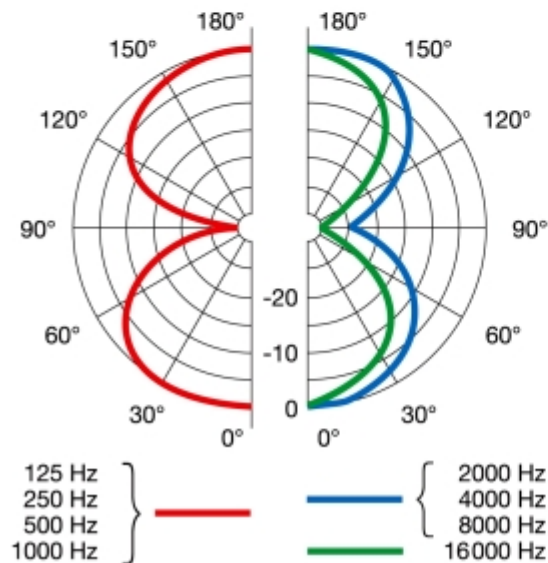


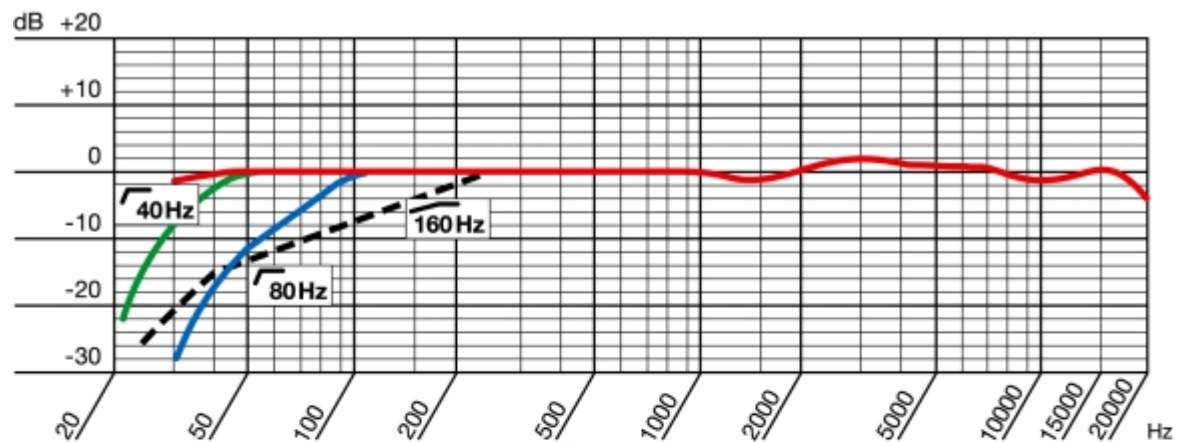



**C 414 XLS
Cardioid**

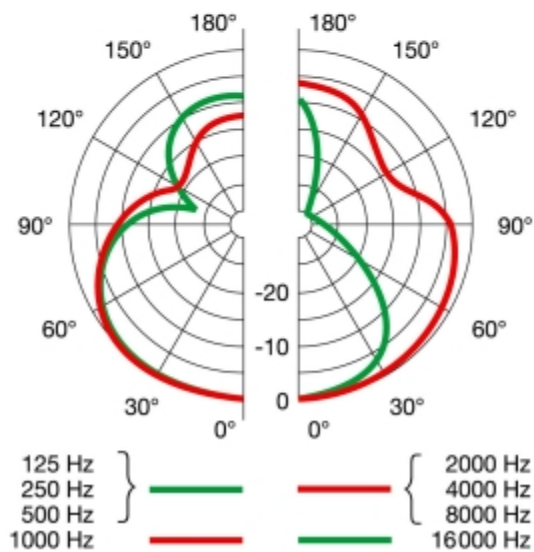



C 414 XLS
Figure-eight

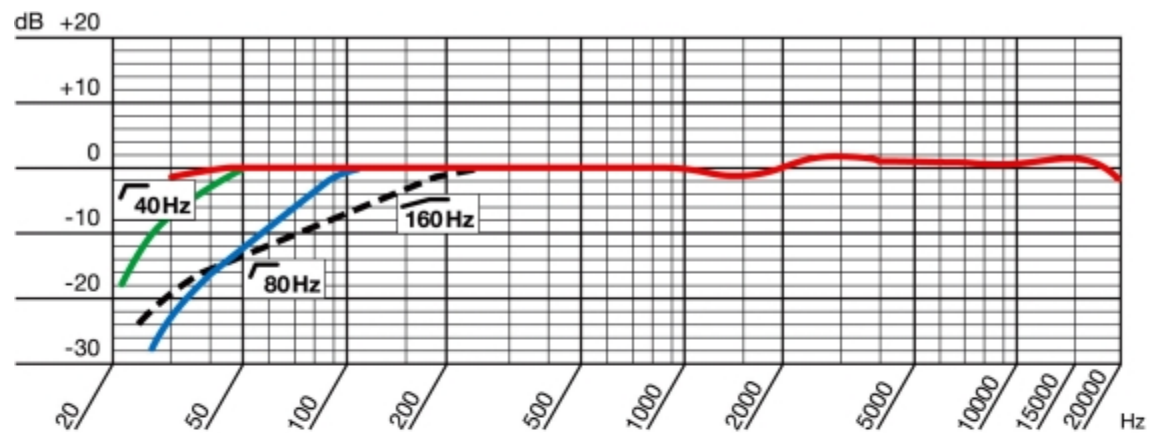

C 414 XLS
Hypercardioid

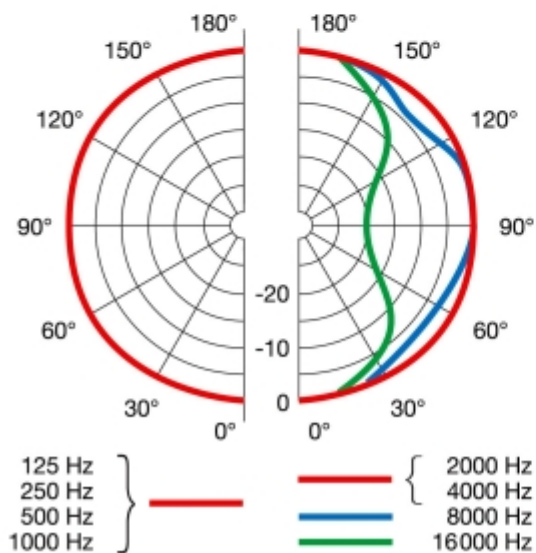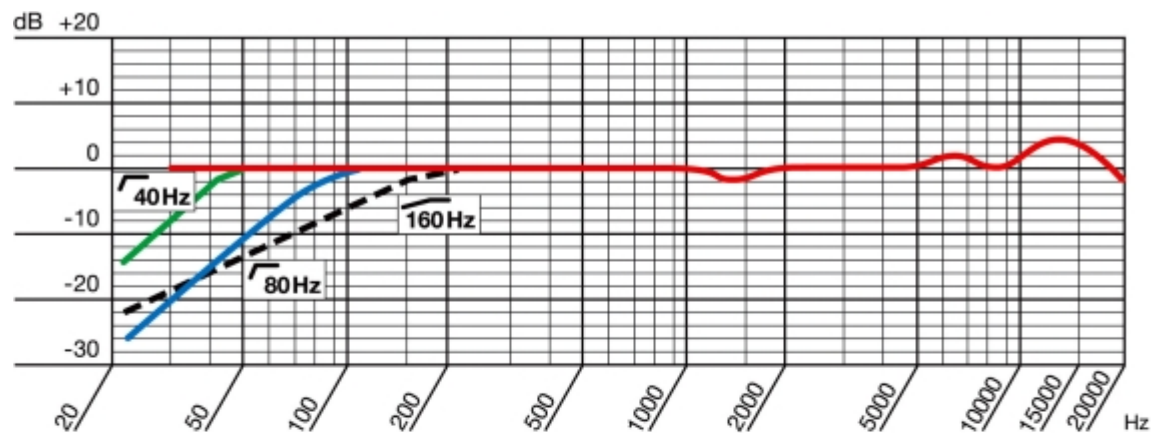

C 414 XLS
Omnidirectional

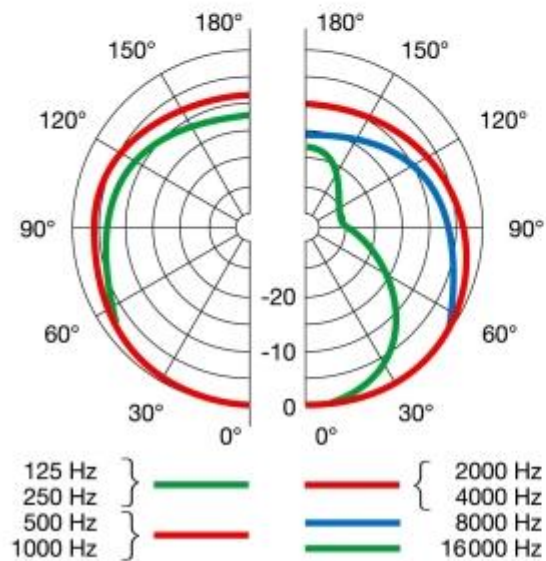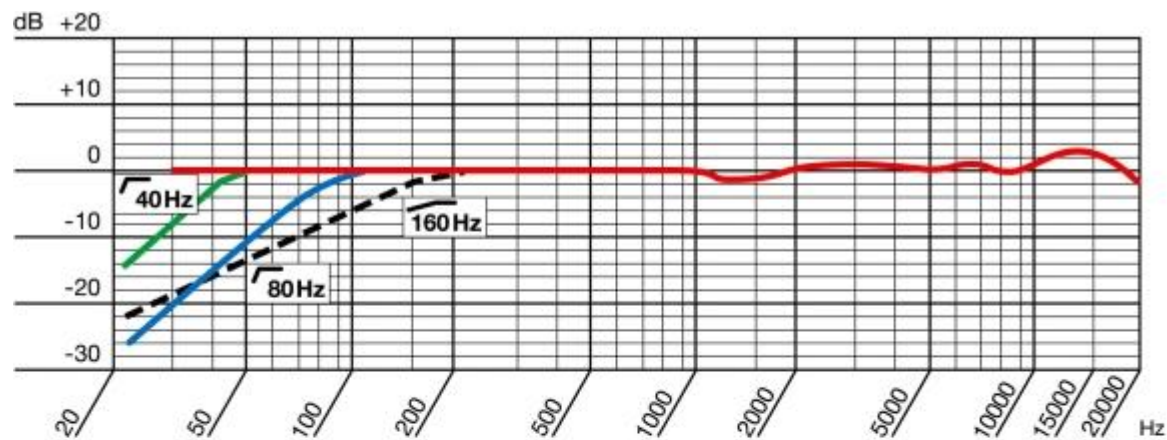

C 414 XLS
Wide Cardioid

Specs

General Specifications

Audio frequency bandwidth	20 - 20000 Hz
Equivalent noise level Sensitivity	6 dB-A
Signal to Noise Preattenuation Pad	23 mV/Pa
Bass cut filter	88 dB-A
Electrical impedance Recommended	-6; -12; -18 dB
load impedance Polar Patterns	160; 80; 40 Hz
	200 Ohms
	2000 Ohms
	Cardioid, Figure of eight, Hypercardioid, Omnidirectional, and Wide Cardioid

Type	Balanced XLR
Gender	Male
Contacts	3-pin

Powering Interface

Voltage	44 to 52 V
Current	4.5 mA