



System 12 SB ENG 2 CF

Sachtler System DV 12 carbon fibre with Fluid Head, ENG 2 CF Tripod , Ground Spreader & Bag

SKU: 1262

If a project requires you to use a small ENG camera, you are going to need a fluid head that can carry a heavy load without compromising on smooth movement. The Sachtler DV 12 SB Fluid Head has a 12-step counterbalance system and a 70 mm sliding plate for perfect balance, while five horizontal and vertical grades of drag ensures smooth pans.

Supporting cameras weighing up to 15 kg, the Sachtler DV 12 SB Fluid Head's mix of flexibility and simplicity make it a reliable companion in even the most demanding of environments. The Touch & Go release systems means that you can mount your camera quickly, accurately and securely. Moving and adjusting shots is as simple as flicking a switch, meaning that there is less time fumbling and more time being creative.

When you need to work quickly and effectively, you need a tripod that won't slow you down. The best-selling Sachtler dual-extractible ENG 2CF carbon fibre tripod gives you optimal stability and reliable performance in every environment. Lightweight and twist-resistant, the one-piece carbon fibre design features a 100 mm bowl with tube diameter of 22 mm. The Sachtler quick clamping system makes locking the tripod in place securely as simple as three quick movements.

This tripod's dual extension provides improved reliability, boosting height range and carrying a payload of 40 kg. Weighing in at 2.4 kg with a transport length of 70 cm, the Sachtler ENG 2 CF provides a balance between lightweight and durability so that you never have to sacrifice performance for comfort and transportability.




Technical specifications

Feature	Metric	Imperial
Range	DV	DV
Pan bar count	1	1
Payload	1 to 15 kg	2.20 to 33 lb
Bowl size	100 mm	100 mm
Spreader type	Ground spreader	Ground spreader
Material	Carbon Fibre	Carbon Fibre
Transport length	890 mm	34.71 in
Tripod stages	2	2
Height with spreader	0.63 to 1.72 m	2.07 to 5.64 ft
Weight	6.60 kg	14.52 lb
Temperature range	-40 to 60 °C	-40 to 140 °F
Tilt range	90° to -75°	90° to -75°
Sliding range	70 mm	2.73 in
Interface Compatibility	Touch & Go	Touch & Go
Counterbalance	12 counterbalance steps	12 counterbalance steps
Drag	5 + 0 horizontal and vertical grades of drag	5 + 0 horizontal and vertical grades of drag

What's in the box?

- **Ground spreader SP 100**
- **DV 12 SB**
- **Tripod ENG 2 CF Padded**
- **bag ENG**

Data sheets

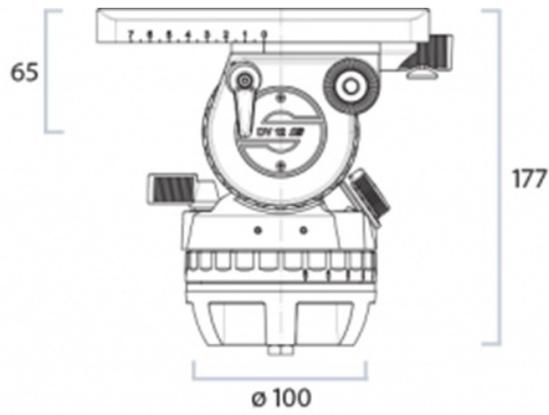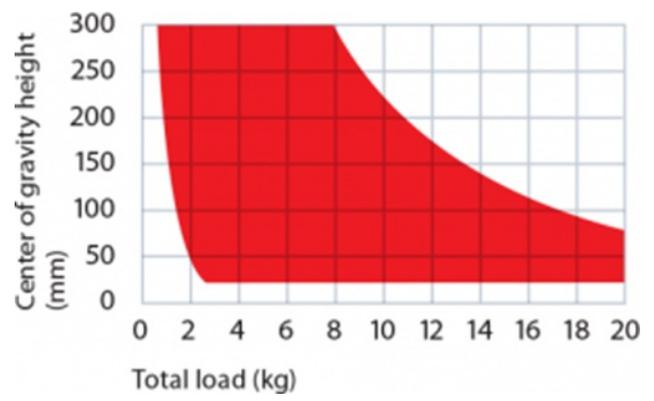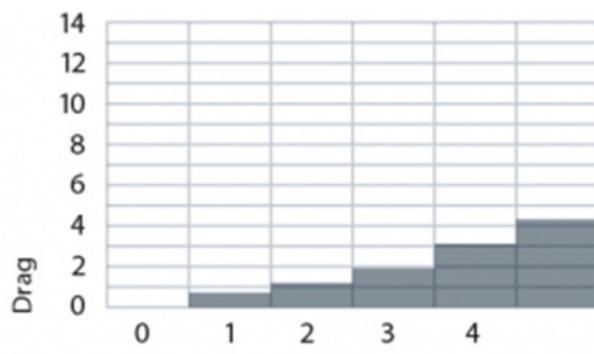

half ball with screw (integrated flat base)