



## System FSB 6 T FT MS

### **Sachtler System FSB 6 Touch & Go carbon fibre with Fluid Head, flowtech® Tripod, Mid-Level Spreader & Bag**

SKU: 0465

Setting up and adjusting shots used to be an endless process of screwing and unscrewing your camera to and from the head. The Sachtler FSB 6 T Fluid Head's Touch & Go mechanism makes it as simple as clicking your camera into place. A safety lock lever means that you can be sure that you never suffer an inadvertent disengagement.

Supporting a payload of up to 8 kg, once your camera is locked in a range of features help you get the best shot possible. Sachtler's unique frictionless leak proof fluid damping gives you three levels of drag for smooth, jerk-free pans and tilts. A sliding camera mount plate with 60 mm sliding range gives you perfect horizontal balance, while Speedbalance technology and illuminated spirit levels mean you can balance easily whatever the surface.

Being able to quickly set up and level a shot in any environment and terrain gives you more time to be creative and get the perfect shot. The Sachtler flowtech® 75 MS carbon fibre tripod's mid-level spreader and rubber feet mean that each leg extends or retracts independently of the other two. Each leg has an individual clamping mechanism so that you can loosen and lock them from a single location near the 75 mm bowl. This deployment speed is paired with an easy to use ergonomic, lightweight design that can follow into the most intense environments.

The carbon fibre design of the Sachtler flowtech® 75 MS only weighs 3.5 kg, but is capable of supporting up to 20 kg. The design also provides a high level of torsional stability so that you can be sure your pans will always stay completely level with no twisting. When you've got the perfect shot, the legs can be folded up while remaining attached, where a magnetic lock holds them in place until you release them again.

---



## Technical specifications


Feature	Metric	Imperial
Range	FSB	FSB
Pan bar count	1	1
Payload	1.50 to 8 kg	3.30 to 17.60 lb
Bowl size	75 mm	75 mm
Spreader type	Mid-level spreader	Mid-level spreader
Material	Carbon Fibre	Carbon Fibre
Transport length	850 mm	33.15 in
Tripod stages	2	2
Height with spreader	0.78 to 1.73 m	2.56 to 5.67 ft
Height without spreader	0.41 to 1.69 m	1.34 to 5.54 ft
Weight	6.10 kg	13.42 lb
Temperature range	-40 to 60 °C	-40 to 140 °F
Tilt range	90° to -70°	90° to -70°
Sliding range	60 mm	2.34 in
Interface Compatibility	Touch & Go	Touch & Go
Counterbalance	10 counterbalance steps	10 counterbalance steps
Drag	3 + 0 horizontal and vertical grades of drag	3 + 0 horizontal and vertical grades of drag

## What's in the box?

- **FSB 6 T**
- **Tripod flowtech® 75 MS**
- **Padded bag flowtech®75**

## Data sheets

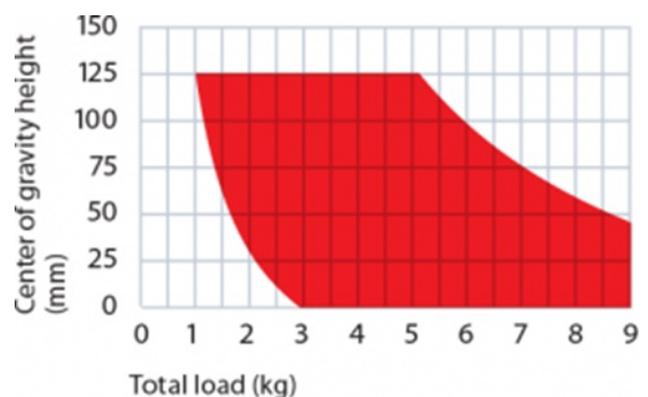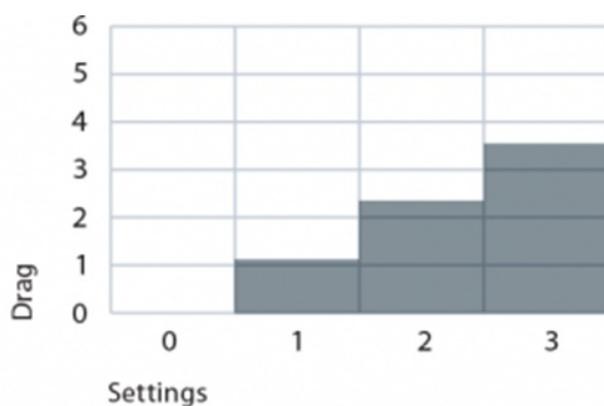

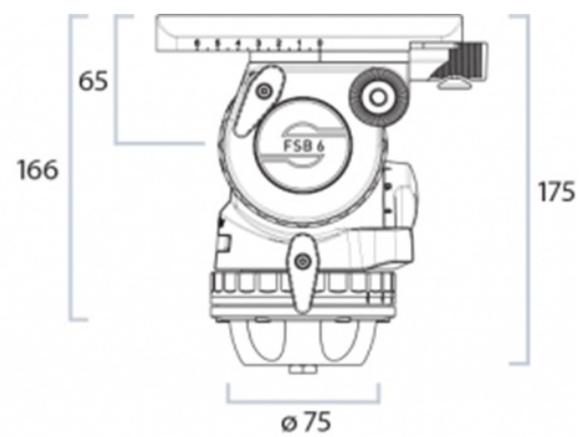

half ball with screw (integrated flat base)

---

---