






AMPLIFIED HORN SPEAKER

PR-HS30W

PROVISION **ISR**

Now you can see!

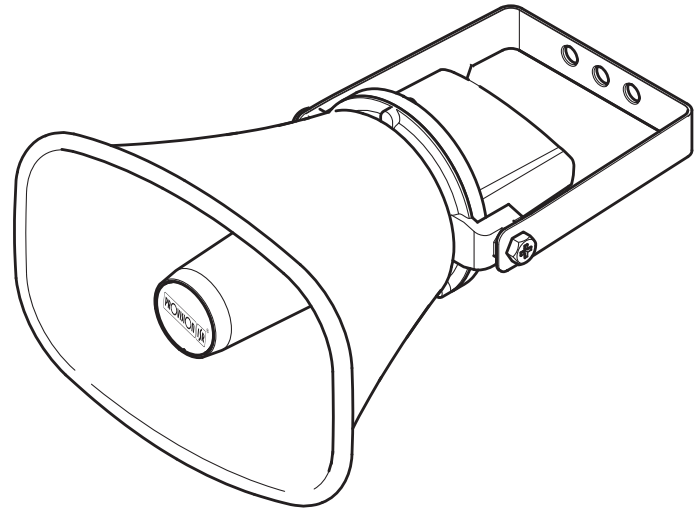

	ITEM	SPECIFICATIONS
1	TOTAL HARMONIC DISTORTION	5% Max at 1KHz 1W
2	SPECIALITY	Weather proof Paging horn speaker
3	RESONANCE FREQUENCY	700 ± 15%Hz at 1V, 25 °C
4	RATED FREQUENCY RANGE	300Hz ~ 5.5K Hz (-20dB band)
5	SOUND PRESSURE LEVEL	112 ± 3dB 1w/m @ 1K Hz
6	POWER HANDLING	DC24V-12V,2A
7	RUB & BUZZ TEST	285(W) × 205(H)× 280(L)mm
8	SPEAKER WEIGHT	2.1kg ± 10%
9	MATERIAL&FINISH	Finish: White ;Horn: ABS, Bracket: Stainless Steel
10	WORK INVIROMENT	Temp -20°C~+40°C, Humidity 45%~85%, Elevation under 1000 m, Dust, corrosive gas or vibration which requires special condition must not exist
11	DIMENSIONS	285(W) × 205(H)× 280(L)mm
12	RATED IMPEDANCE	ACR 8 Ohm