
LOCKTON
Commercial Hardware


Sliding Track Arm with hold open for Model #165

1

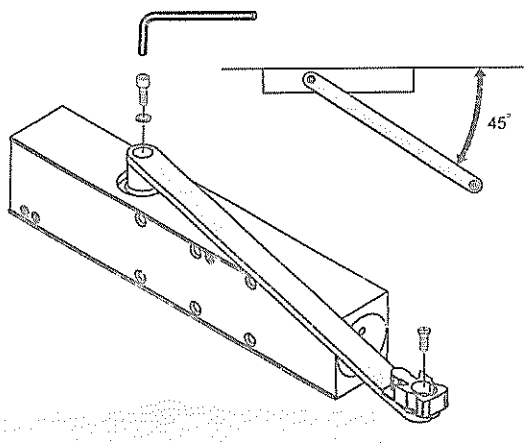


1.Prepare fixing holes in door and frame (use template)
2.Assemble arm to body at 45° to back face. Secure arm and rail foot with bolts provided.

2

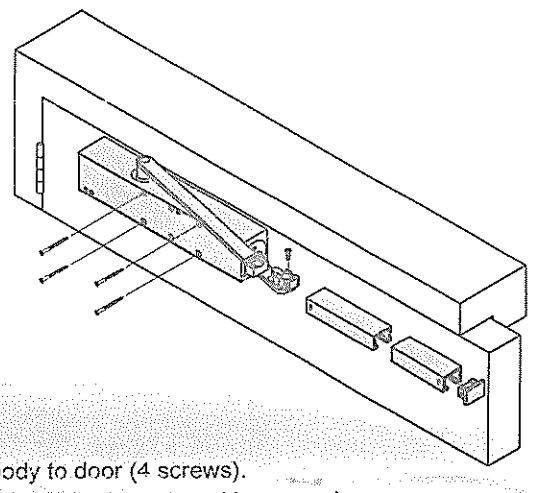


3.Fix body to door (4 screws).
Slip rail foot into track and insert end cap.

3

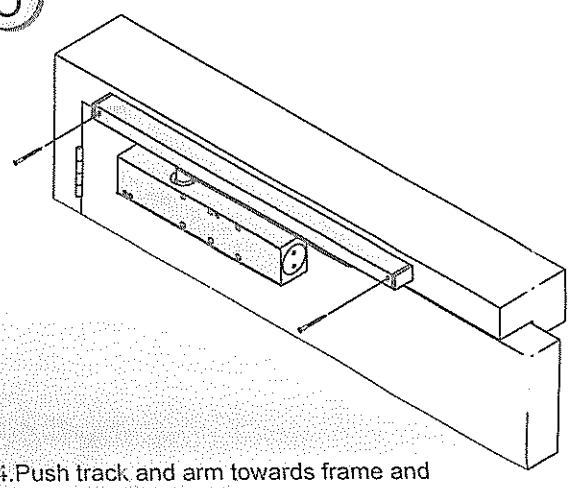


4.Push track and arm towards frame and secure in position (2 screws).

4

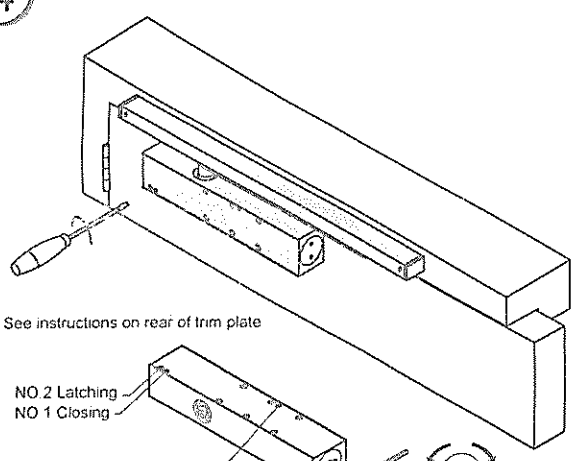


See instructions on rear of trim plate

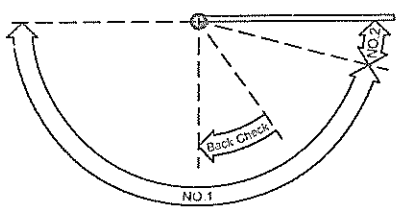


5.When adjusting please note there is a MAXIMUM OF 2TURNS.Over adjustment will affect the performance of the closer.In such instance our Guarantee becomes VOID.


5

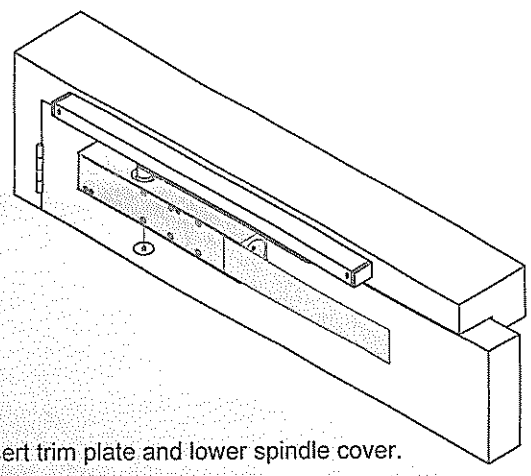



6.Insert trim plate and lower spindle cover.

Regular Fixing-Pull Side

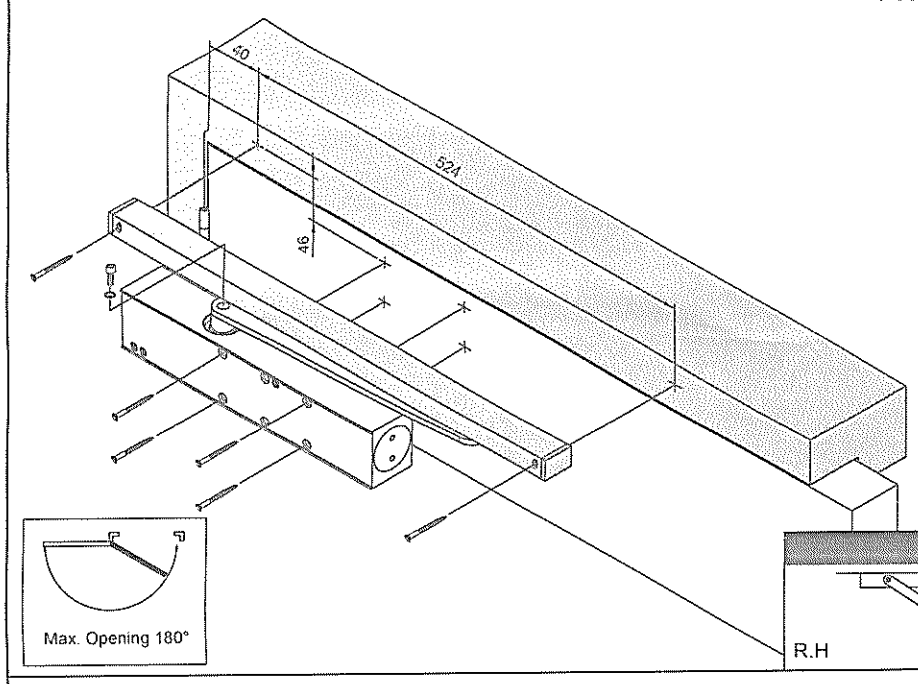

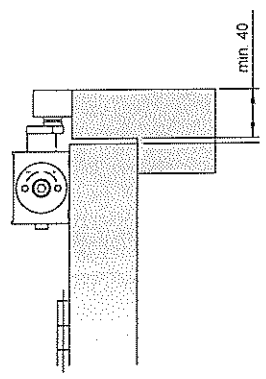

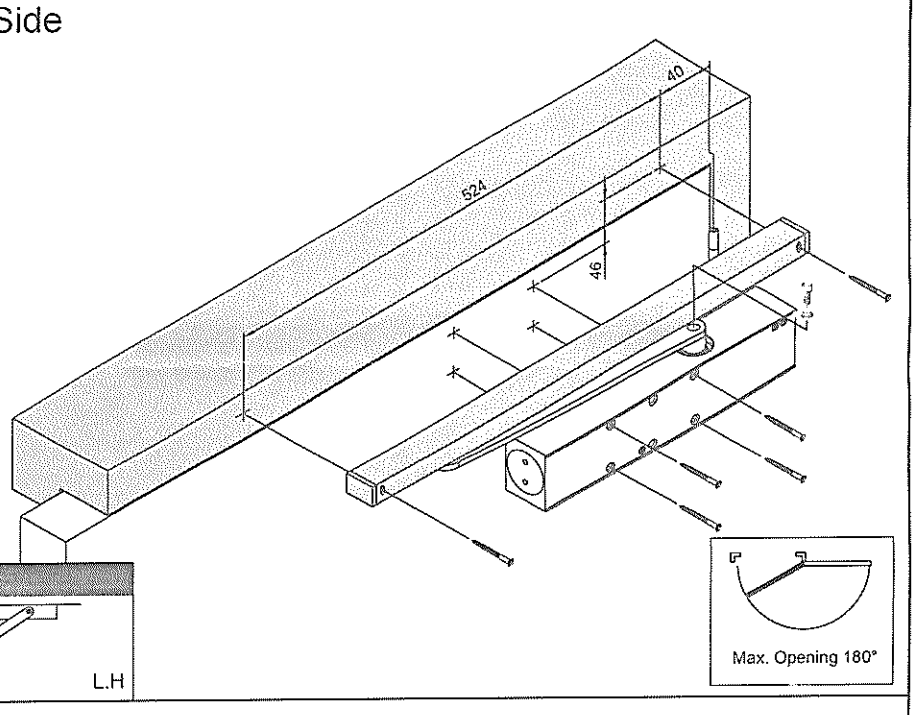

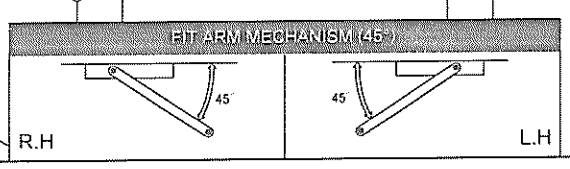

Transom Fixing-Push Side

