
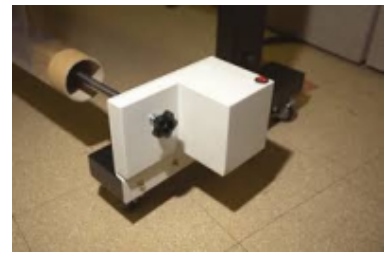


G SERIES LAMINATOR/APPLICATOR

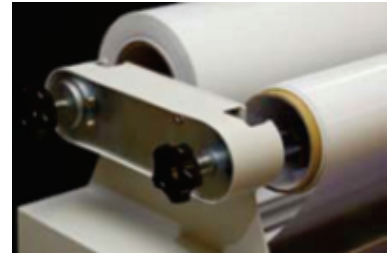

Brief Description:

- Available in 1080mm, 1400mm, 1650mm width
- Variable speed (up to 7mts per minute)
- 2 Silicone rubber rollers (84mm diameter)
- Opens to 10mm (easy single lever action)
- Roller guard with built in safety sensor switch
- Upper and lower idler bar
- Complete with mobile stand
- Remote Foot Pedal control
- Forward & Reverse functions
- Fits 76mm cores
- Lower mandrel with single ended brake
- 1 emergency stop button
- Warranty - 12 months parts

Options:

- Rewind Unit
- Printed Media Mandrel Kit
- Heat Assist Top Roller

Technical Specifications:

Product Model	G1080A	G1400A	G1650A
Laminating Speed	Variable speed (up to 7mts per minute)		
Maximum Laminating Width	1080 mm	1400 mm	1650 mm
Lam. Thickness	Opens up to 10mm		
Feed Tray Height	916mm		
Heat Assist Option	Top Roller Preset 45 to 50 degrees C		

Power supply	AC 240 V / 50,60 Hz		
Assembled Dimensions	L1280 x D560 x H1150mm	L1602 x D560 x H1150mm	L1860 x D570 x H1300mm
Machine Shipping Dimension	L1400 x D520 x H580mm	L1740 x D460 x H590mm	L2000 x D490 x H590mm
Stand Shipping Dimension	L630mm x D710mm x H180mm		
Machine Weight	134kg	173kg	189kg
Stand Weight	17kg		